



LAMINATE DETAIL

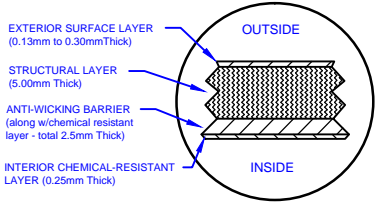

BELL RISER  
(30" ht. shown)



SECTION-JOINT  
DETAIL

Specifications

Cylinder Thickness	0.300"	Liquid Depth (holding tank)	52"
End Cap Thickness	0.300"	Septic Chamber Depth	N/A
Inlet Height (C.L.)	56"	Effluent Chamber Depth	N/A
Outlet Height (C.L.)	54"	Chamber Wall dimensions	
Inlet Diameter	4"	Height:	N/A
Outlet Diameter	4"	Thickness:	N/A
Rib Dimension (C to C)	16.5"	Opening Diameter:	N/A

30"D Cap Lid w/8"  
D poly non-vented  
screw out Lid

30"D x 30"H manway  
bonded directly to tank

4" PVC-DWV  
Inlet

16"  
[406mm]

31"  
[787mm]

Structural Rib

Liquid Level

4" PVC-DWV  
Inlet

4"  
[102mm]

5'  
[1524mm]

5'-6"  
[1676mm]

i.d.

o.d.

52"

39"  
[1000mm]

16.5"  
[419mm]

39"  
[1000mm]

12'  
[3658mm]

66"  
[1676mm]



**FRP**  
MANUFACTURING (2010) INC.

Website: [www.frpmfg.com](http://www.frpmfg.com)  
Toll Free: 1-866-722-6246

T1250-BONDED FIBREGLASS TRICKLE TANK

Overall Length:	Approx. 3,658mm (12')
Overall Weight:	Approx. 283 kg (625 lbs)
Working Capacity:	Approx. 5,344L (1,175 Imp Gal, 1,410 US Gal)
Overall Capacity:	Approx. 5,682L (1,250 Imp Gal, 1,500 US Gal)

DATE: 01-08-2014 | REV: 1

BY: MPS  
BURIAL DEPTH: 7 Ft  
DATE:  
APPROVAL:

