



LAMINATE DETAIL

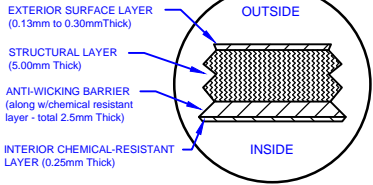

BELL RISER (30" ht. shown)



SECTION-JOINT DETAIL


Specifications

Cylinder Thickness	0.300"	Liquid Depth (holding tank)	52"
End Cap Thickness	0.300"	Septic Chamber Depth	N/A
Inlet Height (C.L.)	56"	Effluent Chamber Depth	N/A
Outlet Height (C.L.)	54"	Chamber Wall dimensions	
Inlet Diameter	4"	Height:	N/A
Outlet Diameter	4"	Thickness:	N/A
Rib Dimension (C to C)	16.5"	Opening Diameter:	N/A

30"D Cap Lid w/8"D Poly non-vented screw out Lid

30"D x 30"H manway bonded directly to tank



4" PVC DWV Outlet



Structural Rib

Liquid Level

4" PVC-DWV Inlet  
4" [102mm]

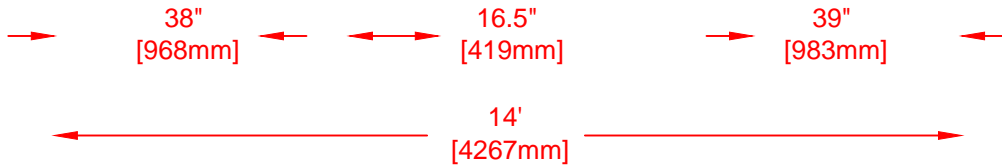

**FRP**  
MANUFACTURING (2010) INC.

Website: [www.frpmsg.com](http://www.frpmsg.com)  
Toll Free: 1-866-722-6246

T1500-BONDED FIBREGLASS TRICKLE TANK

Overall Length:	Approx. 4,267mm (14')
Overall Weight:	Approx. 340 kg (750 lbs)
Working Capacity:	Approx. 6,366L (1,400 Imp Gal, 1,680 US Gal)
Overall Capacity:	Approx. 6,820L (1,500 Imp Gal, 1,800 US Gal)

DATE: 01-08-2014 | REV: 1

BY: MPS  
BURIAL DEPTH: 7 Ft  
DATE:  
APPROVAL:

