


SECTION-JOINT DETAIL





Optional Manway:
762 mm (30") dia. X
305, 762, 1524 or 2134 mm
(12, 30, 60 or 84") height

Specifications			
Cylinder Thickness	0.375"	Liquid Depth (holding tank)	88"
End Cap Thickness	0.475"	Septic Chamber Depth	N/A
Inlet Height (C.L.)	90"	Effluent Chamber Depth	N/A
Outlet Height (C.L.)	N/A	Chamber Wall dimensions	
Inlet Diameter	4"	Height:	N/A
Outlet Diameter	N/A	Thickness:	N/A
Rib Dimension (C to C)	17.25"	Opening Diameter:	N/A
Rib Overlay Thickness	0.250"	Layers of Woven (Rib)	1

Various fittings available including bulkhead fittings, pipe, flanged fittings, vents, etc. at extra cost.

Accessories available such as pump stand, 2nd manway, ladder, lock bar for lid, etc. at extra cost.

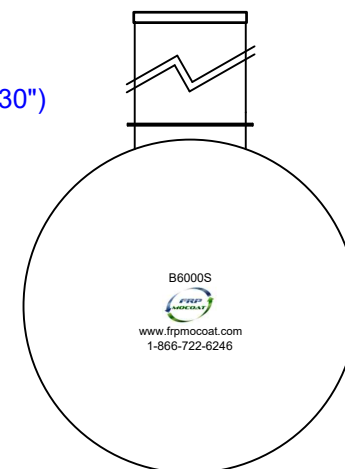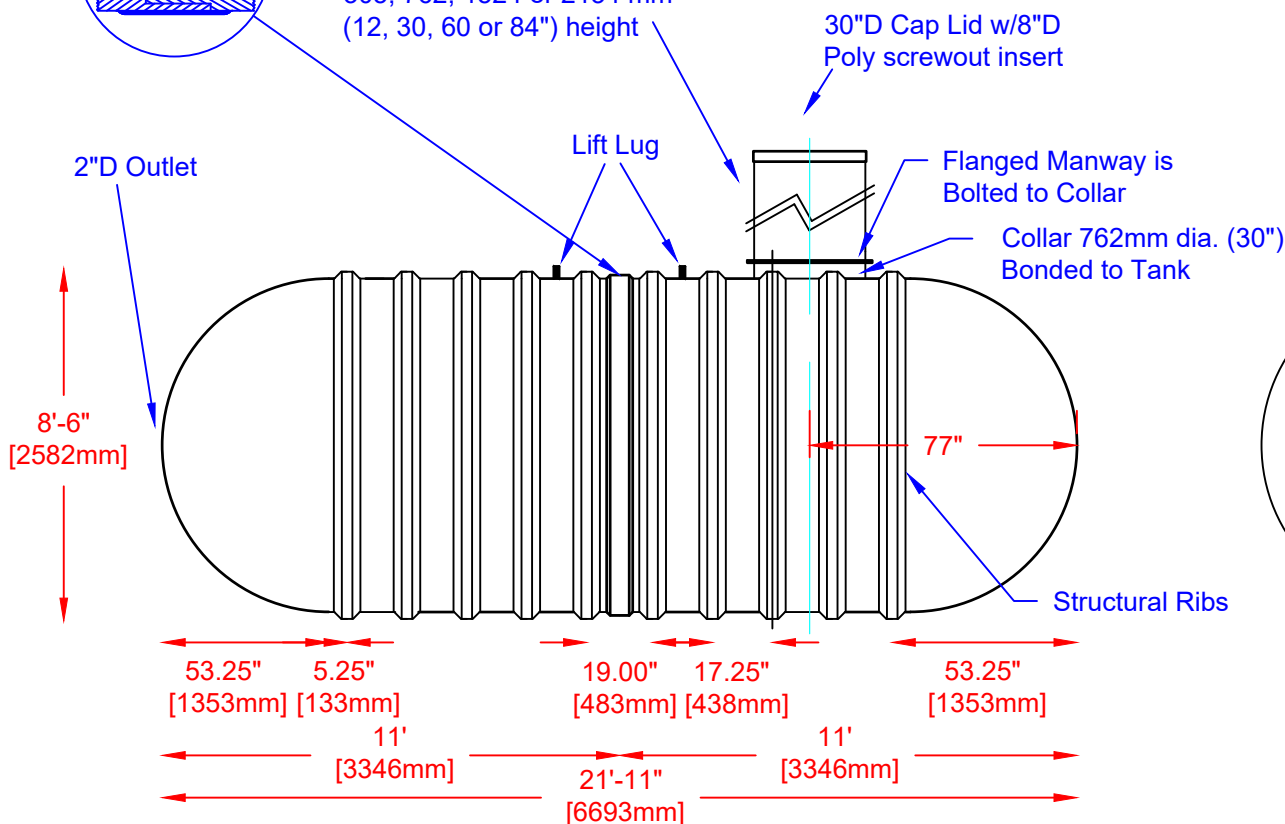

Website: www.frpmocoat.com
Toll Free: 1-866-722-6246

B6000S FIBREGLASS SEWAGE HOLDING TANK		DATE: 04-22-2022	REV: 3
Overall Length:	Approx. 6,693mm (21'11")	BY: MPS	
Overall Weight:	Approx. 1,111 kg (2,450 lbs)	BURIAL DEPTH: 7 Ft	
Working Capacity:	Approx. 22,120L (4,866 Imp Gal, 5,839 US Gal)	DATE:	
Overall Capacity:	Approx. 22,886L (5,034 Imp Gal, 6,040 US Gal)	APPROVAL:	

