


**SECTION-JOINT DETAIL**



30"D Cap Lid w/8"D Poly screwout insert

Lift Lug

Structural Ribs

2"D Outlet

8'-6"  
[2591mm]

56.25"  
[1429mm]


15'  
[4585mm]

30'-1"  
[9169mm]

15'  
[4585mm]

81"  
56.25"  
[1429mm]

Optional Manway:  
762 mm (30") dia. X  
305, 762, 1524 or 2134 mm  
(12, 30, 60 or 84") height  
Flanged Manway is  
Bolted to Collar  
762mm (30") dia. Collar  
Bonded to Tank

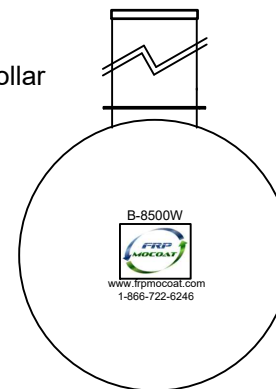

Various fittings available  
including bulkhead fittings,  
pipe, flanged fittings, vents,  
etc. at extra cost.

Accessories available such as  
pump stand, 2nd manway, ladder,  
lock bar for lid, etc. at extra cost.

## Specifications

Cylinder Thickness	0.375"	Liquid Depth (holding tank)	88"
End Cap Thickness	0.475"	Septic Chamber Depth	N/A
Inlet Height (C.L.)	90"	Effluent Chamber Depth	N/A
Outlet Height (C.L.)	N/A	Chamber Wall dimensions	
Inlet Diameter	4"	Height:	N/A
Outlet Diameter	N/A	Thickness:	N/A
Rib Dimension (C to C)	17.25"	Opening Diameter:	N/A
Rib Overlay Thickness	0.250"	Layers of Woven (Rib)	1



Website: [www.frpmocoat.com](http://www.frpmocoat.com)  
Toll Free: 1-866-722-6246

### B8500S FIBREGLASS SEWAGE HOLDING TANK

Overall Length:	Approx. 9,169mm (30'1" )	DATE: 04-22-2022	REV: 4
Overall Weight:	Approx. 1,500 kg (3,300 lbs)	BY: MPS	
Working Capacity:	Approx. 37,610L (8,273 Imp Gal, 9,928 US Gal)	BURIAL DEPTH: UP TO 7'	
Overall Capacity:	Approx. 39,012L (8,582 Imp Gal, 10,298 US Gal)	DATE:	
		APPROVAL:	

