



LAMINATE DETAIL

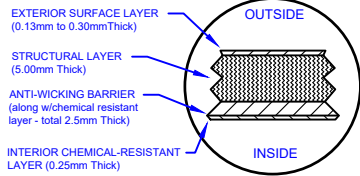

BELL RISER (30" ht. shown)



SECTION-JOINT DETAIL

Specifications

Cylinder Thickness	0.300"	Septic Chamber Depth	52"
End Cap Thickness	0.300"	Septic Chamber Depth	N/A
Inlet Height (C.L.)	56"	Effluent Chamber Depth	N/A
Outlet Height (C.L.)	54"	Chamber Wall dimensions	
Inlet Diameter	4"	Height:	N/A
Outlet Diameter	4"	Thickness:	N/A
Rib Dimension (C to C)	16.5"	Opening Diameter:	N/A

30"D Lid w/8"D
poly nonvented
screw out insert.

30"D x 30"H
manway bonded
directly to tank

4" PVC-DWV
Outlet

Structural Rib

Liquid Level

4" PVC-DWV
Inlet

16"
[406mm]

31"
[785mm]

54"

4"
[102mm]
5'
[1532mm]
i.d.

5'-6"
[1682mm]
o.d.

38"
[975mm]

16.5"
[419mm]

38"
[975mm]

16'
[4877mm]

66"
[1676mm]



Website: www.frpmocoat.com
Toll Free: 1-866-722-6246

T1750-BONDED FIBREGLASS TRICKLE TANK

DATE: 04-22-2022 REV: 1

Overall Length: Approx. 4,877mm (16')

BY: MPS

Overall Weight: Approx. 397 kg (875 lbs)

BURIAL DEPTH: 7 Ft

Working Capacity: Approx. 7,390L (1,625 Imp Gal, 1,950 US Gal)

DATE:

Overall Capacity: Approx. 7,955L (1,750 Imp Gal, 2,100 US Gal)

APPROVAL:

