

AGSX3000

FIBREGLASS SEWAGE TANK

Overall Height: 1,676mm (5' 6")
Overall Weight: 1,200 lbs (545 kg)
Capacity: 13,638 L (3,000 Imp Gal, 3,600 US Gal)

TANKS SHALL BE LEAK TESTED THEN INSTALLED AS
SPECIFIED IN THE CURRENT INSTALLATION INSTRUCTIONS
PROVIDED WITH THE TANK.

MANWAYS AND FITTINGS MUST NOT INTERFERE WITH THE
HOLD DOWN LOCATIONS (IF APPLICABLE).

DIMENSIONS ARE NOMINAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE
SOLE PROPERTY OF FIBREGLASS CANADA. ANY
REPRODUCTION IN WHOLE OR IN PART WITHOUT WRITTEN
PERMISSION OF FIBREGLASS CANADA IS STRICTLY
PROHIBITED.

OPTIONAL EQUIPMENT:

☐ 30" DIA. x 12" H FRP MANWAY ☐ 30" DIA. STD LID
☐ 30" DIA. x 30" H FRP MANWAY ☐ 30" DIA. LID W/ POLY NV LID
☐ 30" DIA. x 60" H FRP MANWAY ☐ FITTINGS
☐ 30" DIA. x 84" H FRP MANWAY

PLEASE INDICATE ALL REQUIRED OPTIONAL EQUIPMENT. INDICATE
ON TANK DRAWING LOCATION OF FITTINGS AND MANWAYS

SYMBOL IDENTIFICATION

☐ 4" VENT

☐ LIFTING LUG

CUSTOMER:

DESTINATION:

INTENDED USE:

PREPARED BY





SCALE:	REV:	DRAWN:	DATE:
N.T.S	0	MPS	21/07/22


APPROVED:	DATE:
-----------	-------

DATE:

LAMINATE DETAIL

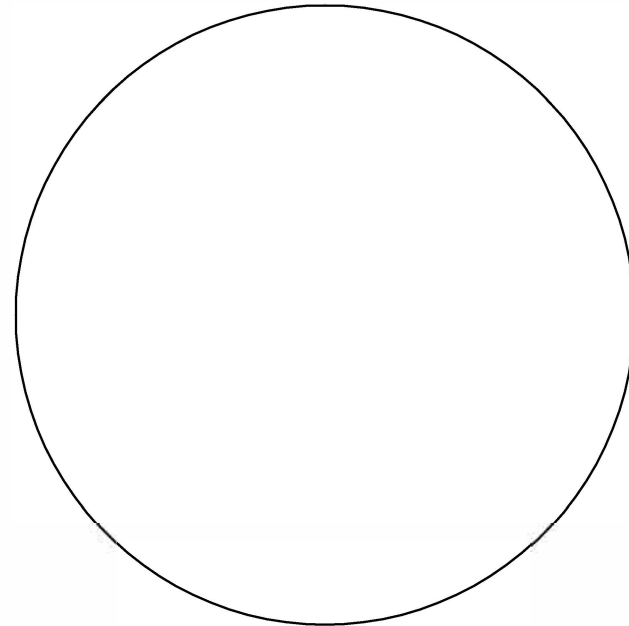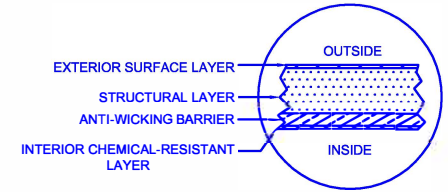

66"
[1683mm]

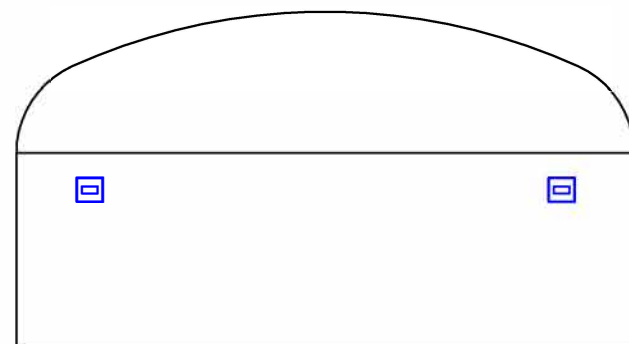

38"
[965mm]

120"
[3048mm]