

SECTION-JOINT DETAIL



Optional Manway:
762 mm (30") dia. X
305, 762, 1524 or 2134 mm
(12, 30, 60 or 84") height

30"D Cap Lid w/8"D
Poly screwout insert

2"D Outlet

Lift Lug



Flanged Manway is
Bolted to Collar

Collar 762mm dia. (30")
Bonded to Tank

8'-6"
[2582mm]

Various fittings available
including bulkhead fittings,
pipe, flanged fittings, vents,
etc. at extra cost.

Accessories available such as
pump stand, 2nd manway,
ladder, lock bar for lid, etc. at
extra cost.

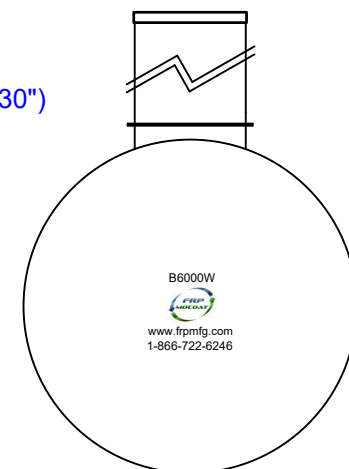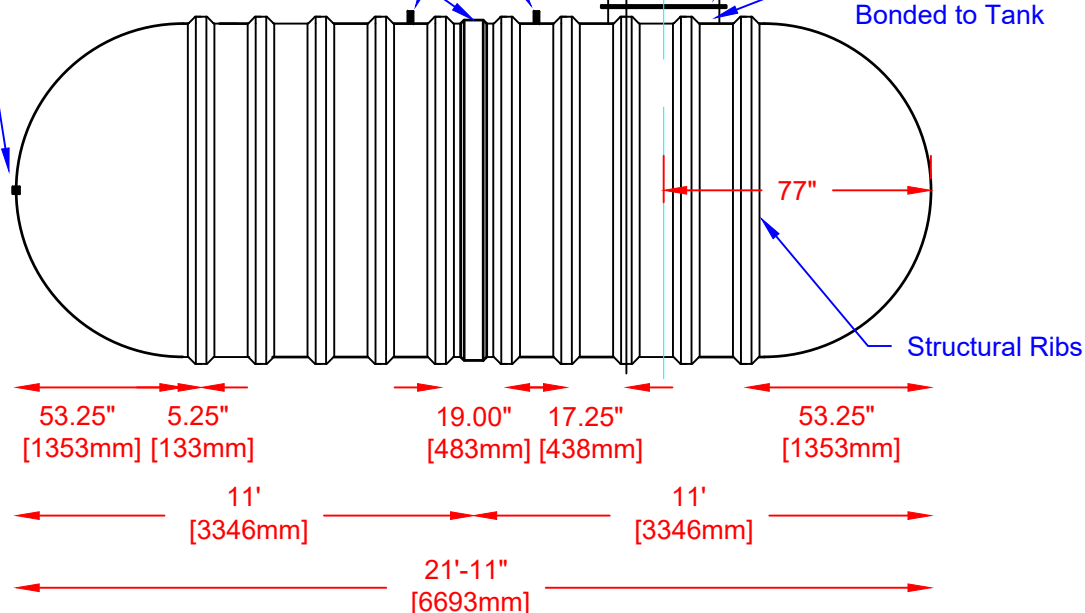

Specifications

Total Cylinder Thickness	0.375"
Total End Cap Thickness	0.475"
Inlet Height (C.L.)	N/A
Outlet Height (C.L.)	48"
Inlet Diameter	N/A
Outlet Diameter	2"
Rib Dimension (C to C)	17.25"
Rib Overlay Thickness	0.250"
Layers of Woven (Rib)	1



B6000W FIBREGLASS WATER CISTERN

DATE: 07-07-2022

DWG SCALE:

Overall Length: Approx. 6,693mm (21'11")

BY: MPS

REV: 4

Overall Weight: Approx. 1,111 kg (2,450 lbs)

BURIAL DEPTH: UP TO 7'

Overall Capacity: Approx. 27,431L (6,034 Imp Gal, 7,240 US Gal)

APPROVAL:



Drinking Water
NSF/ANSI 61

Website: www.frpmfg.com
Toll Free: 1-866-722-6246