


SECTION-JOINT DETAIL



Lift Lug

30"D Cap Lid w/8"D Poly screwout insert

Optional Manway:
762 mm (30") dia. X
305, 762, 1524 or 2134 mm
(12, 30, 60 or 84") height

Flanged Manway is Bolted to Collar

762mm (30") dia. Collar Bonded to Tank

2"D Outlet

8'-6"
[2591mm]

Structural Ribs

56.25"
[1429mm]


56.25"
[1429mm]

15'
[4585mm]

15'
[4585mm]

30'-1"
[9169mm]

81"

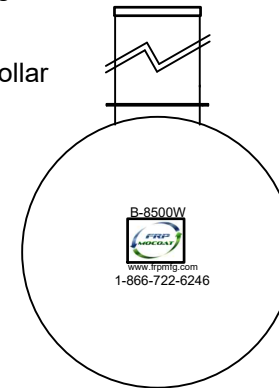

Various fittings available including bulkhead fittings, pipe, flanged fittings, vents, etc. at extra cost.

Accessories available such as pump stand, 2nd manway, ladder, lock bar for lid, etc. at extra cost.

Specifications

Total Cylinder Thickness	0.375"
Total End Cap Thickness	0.475"
Inlet Height (C.L.)	N/A
Outlet Height (C.L.)	48"
Inlet Diameter	N/A
Outlet Diameter	2"
Rib Dimension (C to C)	17.25"
Rib Overlay Thickness	0.250"
Layers of Woven (Rib)	1



Website: www.frpmfg.com
Toll Free: 1-866-722-6246

B8500W FIBREGLASS WATER CISTERN

Overall Length:	Approx. 9,169mm (30'1")
Overall Weight:	Approx. 1,500 kg (3,300 lbs)
Overall Capacity:	Approx. 39,012L (8,582 Imp Gal, 10,298 US Gal)

DATE: 07-07-2022

DWG SCALE:

BY: MPS

REV: 4

BURIAL DEPTH: UP TO 7'

APPROVAL:

