




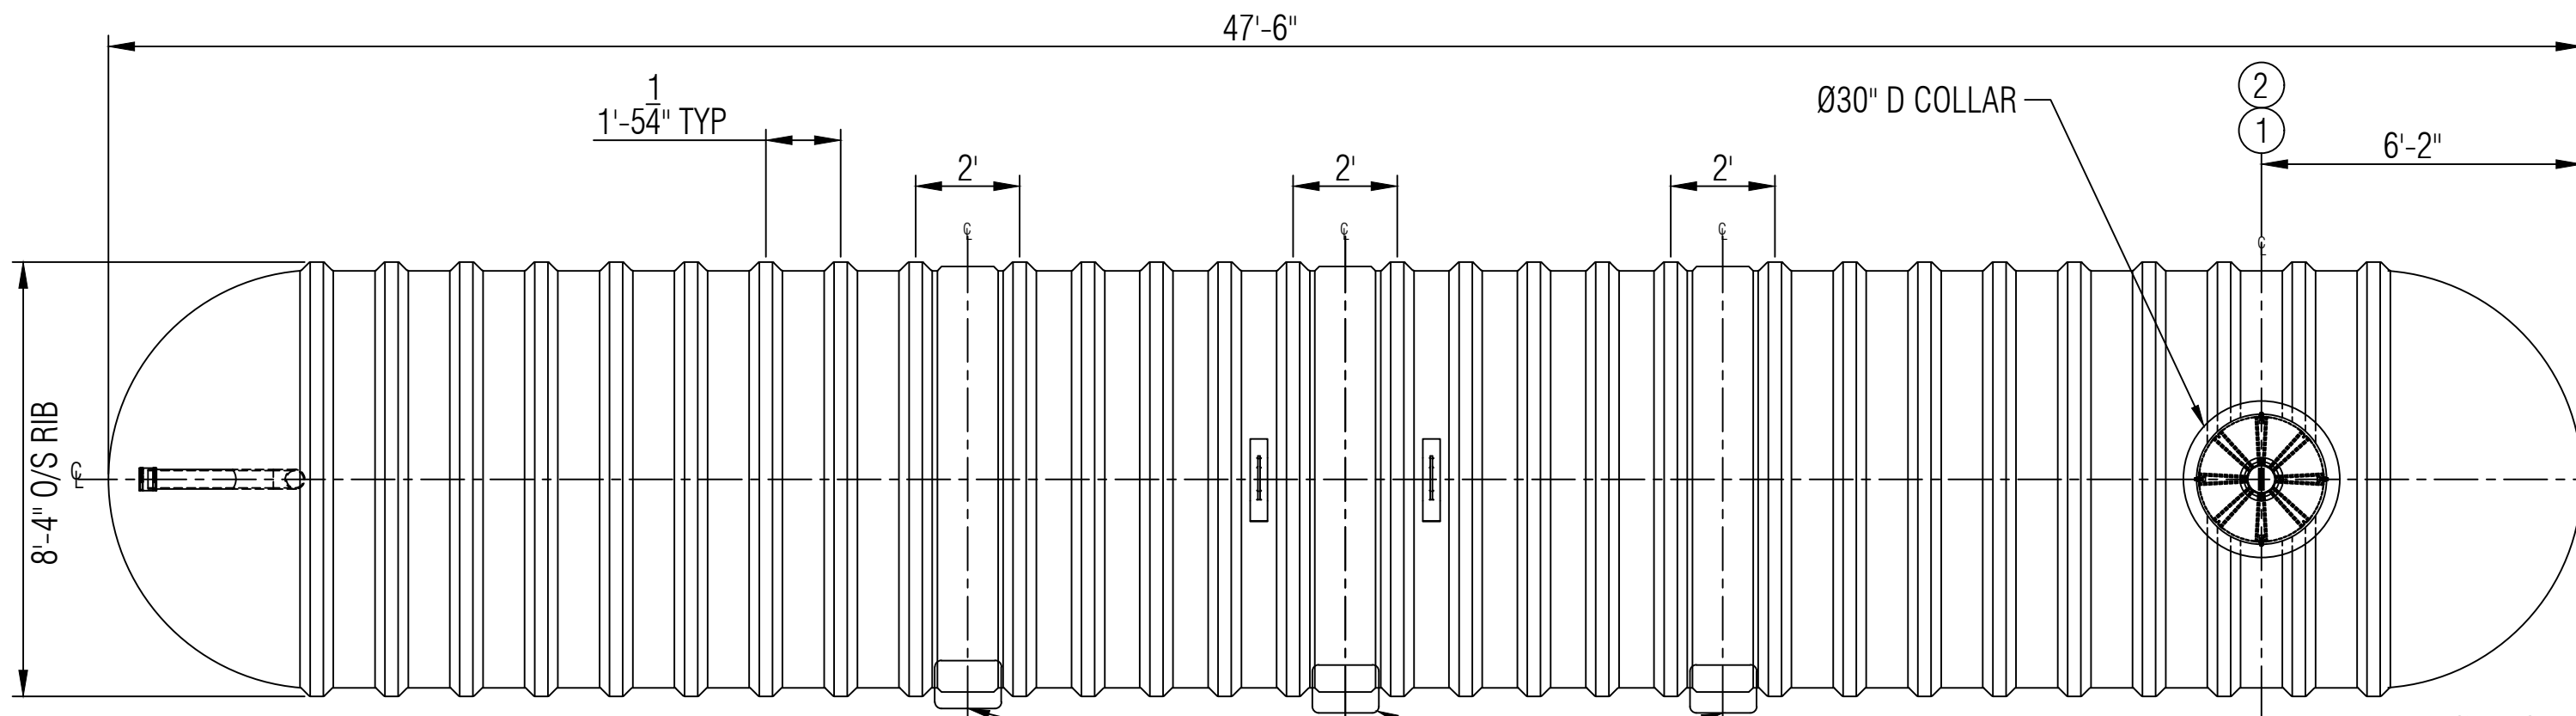


PLAN

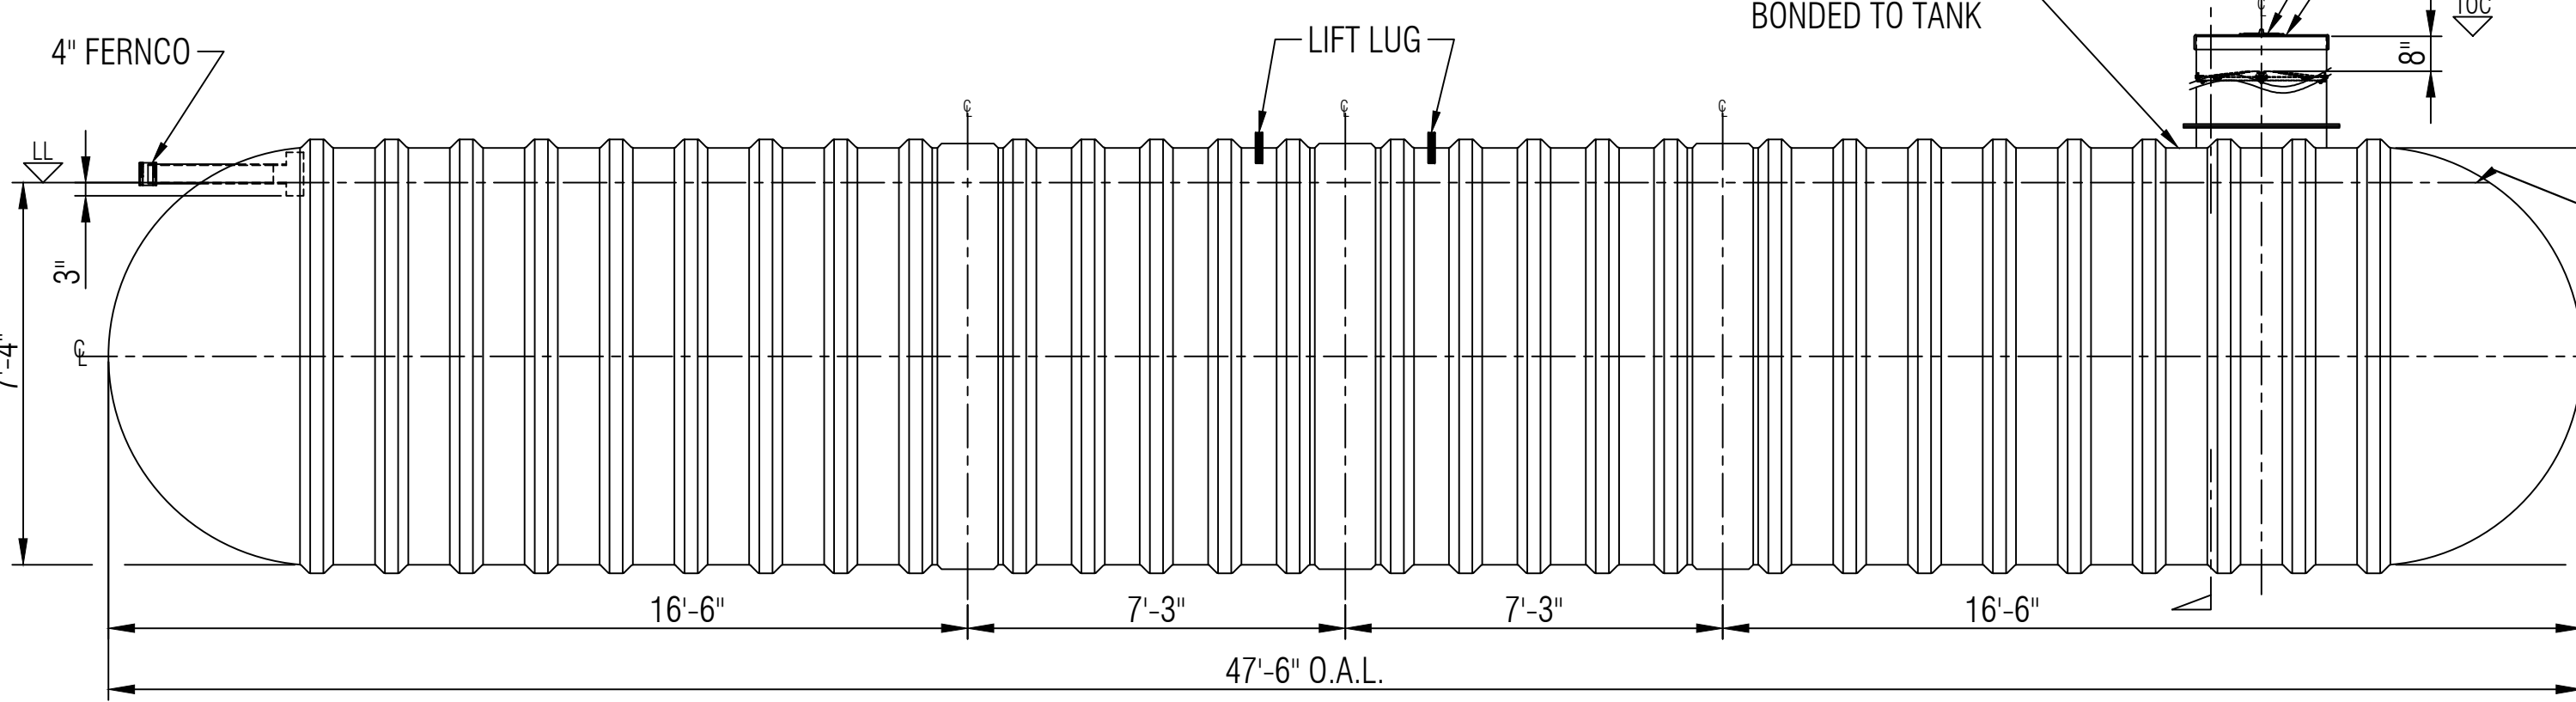





ELEVATION

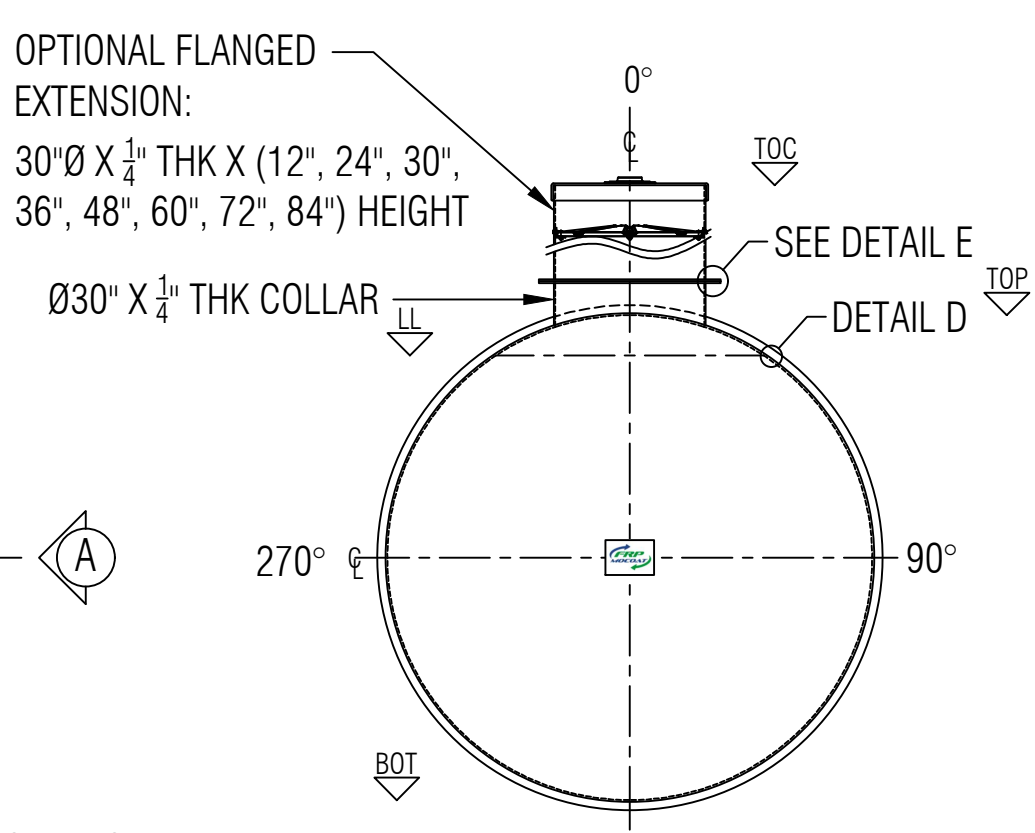

ELEVATION A

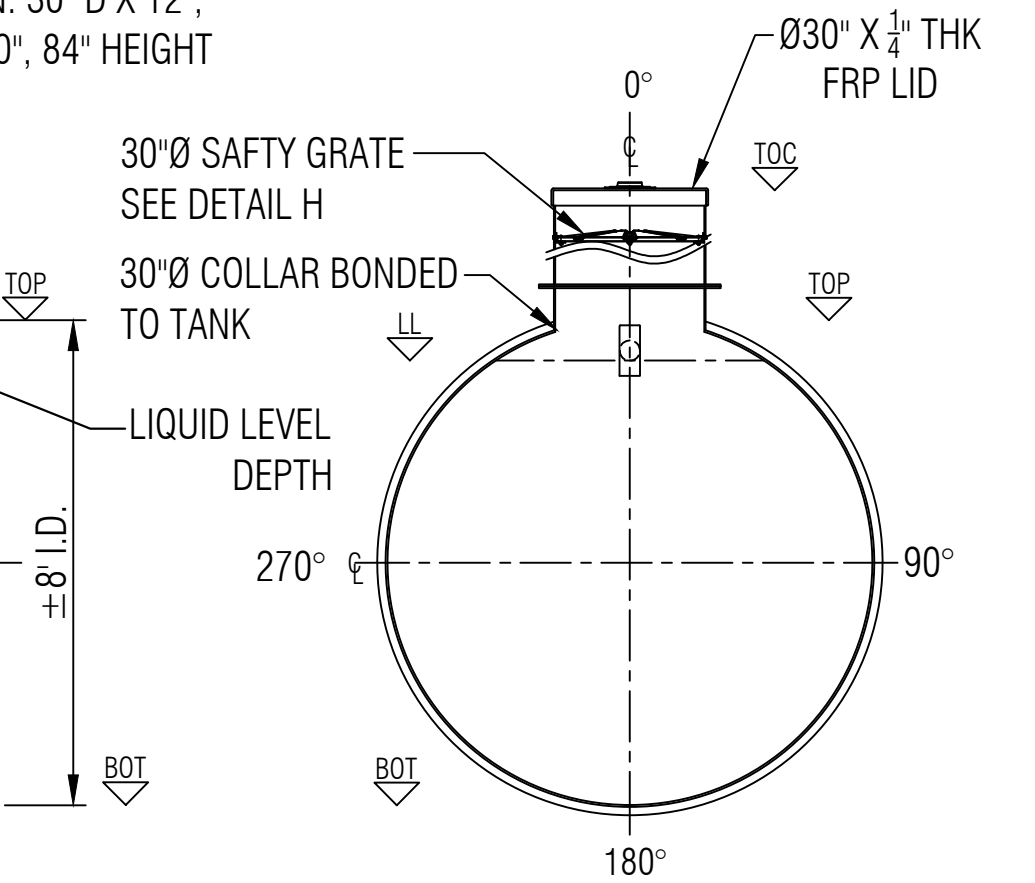

SECTION B

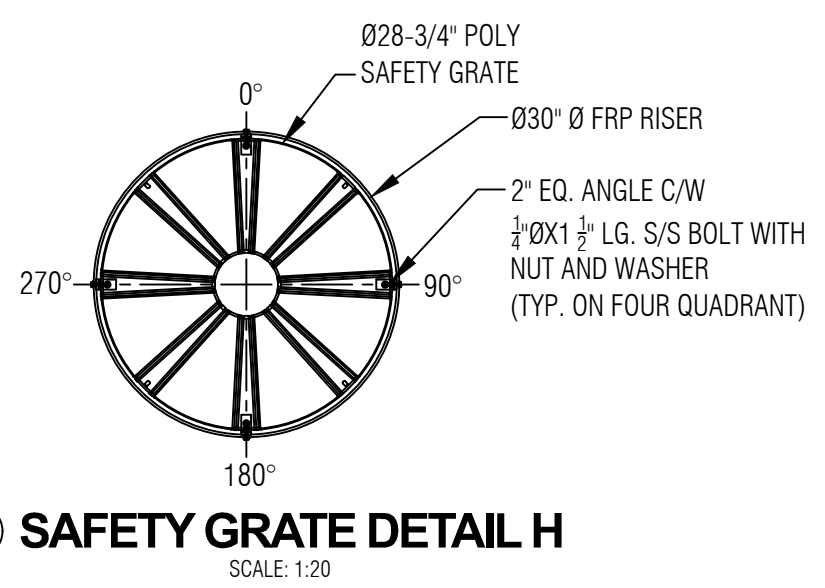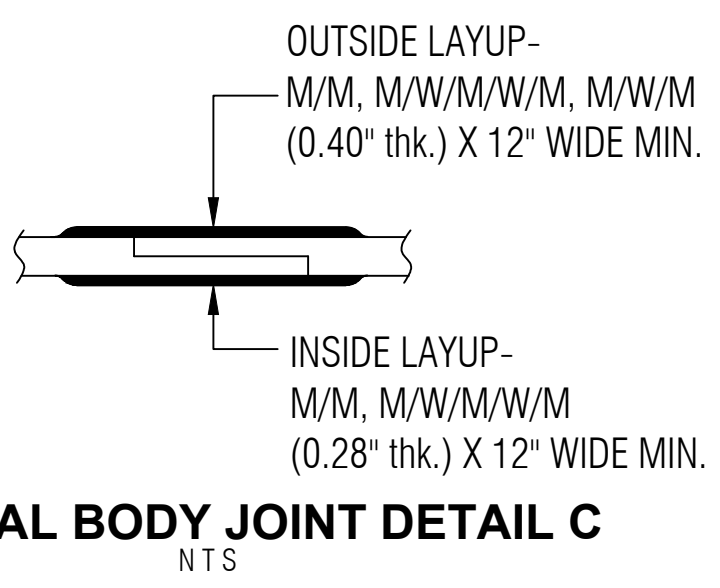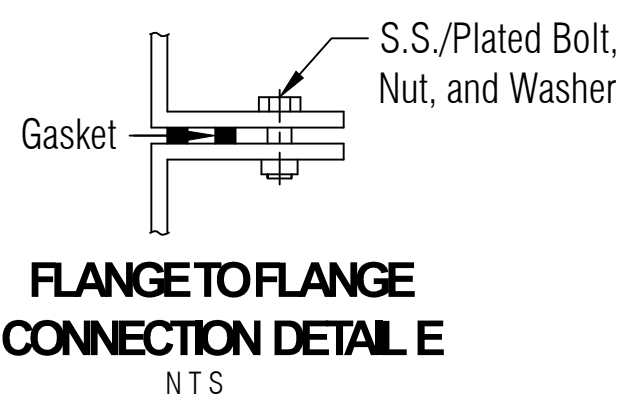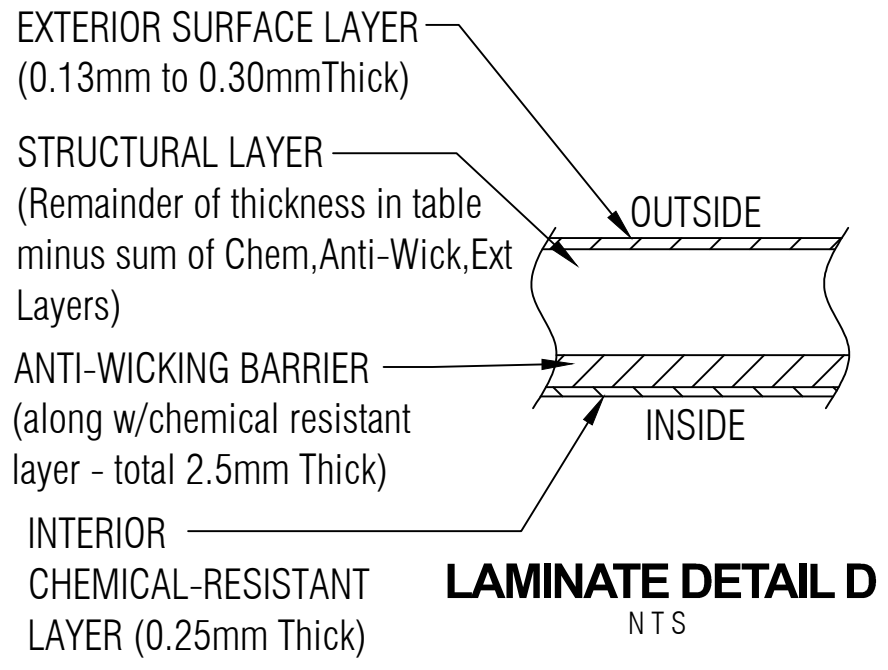

LEGEND:
TOC - TOP OF CAP LID
TOF - TOP OF FLANGE
TOP - TOP CYLINDER
BOT - BOTTOM CYLINDER
I/S - INSIDE
LL - LIQUID LEVEL
O.A.H.-OVERALL HEIGHT
O.A.L.-OVERALL LENGTH
I/S - INSIDE
O/S - OUTSIDE
Ø - DIAMETER
° - DEGREE/S
TYP- TYPICAL
CL - CENTER LINE
NTS - NOT TO SCALE

GENERAL NOTES:
- CSA B66 CERTIFIED FRP TANK FOR SEWAGE HOLDING TANK.
- RATED FOR 7' OF BURIAL DEPTH AND NO TRAFFIC LOADING.
- ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN.
- SAFETY GRATE CAN WITHSTAND 91 KG. OF DEAD LOAD.
- DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED.
- 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS.



ITEM#	QTY	PART LIST	DESCRIPTION	SHELL THICKNESS:	0.500"	DRAWN:	CCL/ATF
1	1	30" CAP LID W/ 8"D POLY SCREW OUT INSERT		HEMI HEAD THICKNESS:	0.650"	CHECKED:	ATF
2	1	30"Ø MANWAY COLLAR	30"Ø FRP COLLAR	RIBS THICKNESS:	0.25"	DATE:	DEC 10, 2024
3	1	4" FERNCO	FLEXIBLE CONNECTOR	RIB SPACING:	17-1/4" (CL to CL)	DESIGNED:	FRP
4	1	4"Ø PVC PIPE & TEEWYE	INLET	LENGTH:	14,478MM (47'-6")	APPROVED:	MPS
5	2	MILD STEEL	LIFT LUGS	WORKING CAPACITY:	61,472L (13,522 IG/16,226 USG)	MFG:	
6	1	POLYETHYLENE SAFETY GRATE C/W HARDWARE	SAFETY GRATE	OVERALL CAPACITY:	63,794L (14,033 IG/16,840 USG)	PM:	
7						SALES:	

CLIENT:	FRP/MOCOAT		
TITLE:	B14000S FIBERGLASS HOLDING TANK		
FRP MOCOAT FIBERGLASS LTD.			
SIZE	DRAWING NUMBER:	REVISION	
C	B14000S	0	
SCALE	WEIGHT:	3,198 KG (7,050 LBS)	SHEET
1:40	BURIAL DEPTH:	RATED 7'-0"	1/1