



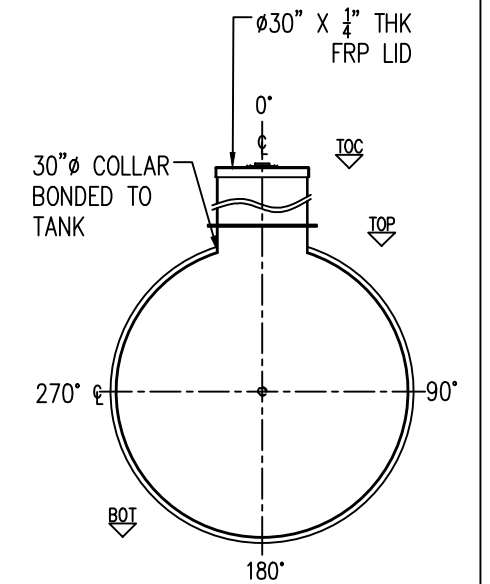



SECTION B

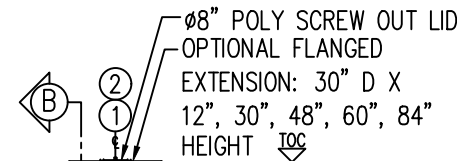

OUTSIDE


INSIDE

LAMINATE DETAIL D
N T S

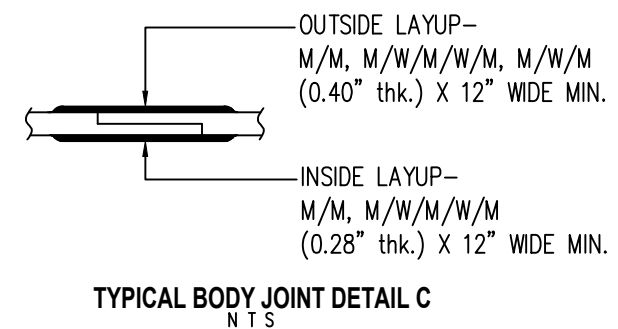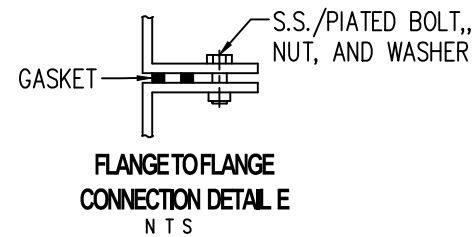

LEGEND:

TOC - TOP OF CAP LID
TOF - TOP OF FLANGE
TOP - TOP CYLINDER
BOT - BOTTOM CYLINDER
I/S - INSIDE
LL - LIQUID LEVEL
O.A.H.-OVERALL HEIGHT
O.A.L.-OVERALL LENGTH
I/S - INSIDE
O/S - OUTSIDE
Ø - DIAMETER
° - DEGREE/S
TYP- TYPICAL
C - CENTER LINE
NTS - NOT TO SCALE

GENERAL NOTES		ITEM#		QTY	PART LIST	DESCRIPTION	SHELL THICKNESS: 0.500"		DRAWN: EA/CCL/ATF		CLIENT: FRP/MOCOAT FIBERGLASS LTD.			
- CSA ANSI/NSF 61 CERTIFIED FRP POTABLE WATER TANK. - RATED FOR 7' OF BURIAL DEPTH AND NO TRAFFIC LOADING. - ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN.. - DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED. - 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS.		1	1	30"CAP LID W/ 8"D POLY SCREW OUT INSERT, VENTED	FRP LID	HEMI HEAD THICKNESS: 0.650"		CHECKED: MPS	TITLE: B15000W FRP POTABLE WATER TANK					
		2	1	30" MANWAY COLLAR	30"Ø FRP MANWAY	RIBS THICKNESS: 0.25" WITH 1 WR		DATE: AUG. 15,2025	 FRPMOCOAT FIBERGLASS LTD.					
		3	1	2" FRP NPT CONNECTION	OUTLET	RIB SPACING: 17 1/4" CL TO CL		DESIGNED: FRP						
		4	2	CARBON STEEL LIFT LUG	LIFT LUG	WEIGHT: 3,198 KG (7,050 LBS)		APPROVED: MPS	SIZE: B		DRAWING NUMBER: B15000W		REVISION: 0	
		5				LENGTH: 15,532MM (50'-11")(47'-6")		MFG.: DS	SCALE: 1"		WEIGHT: 3,357 KG (7,400 LBS)	SHEET: 1/1		
		6				WORKING CAPACITY: N/A		QA: GA	BURIAL DEPTH: RATED 7'- 0"					
7				OVERALL CAPACITY: 68,656L (15,102 IG/18,122 USG)		SALES: TA								