
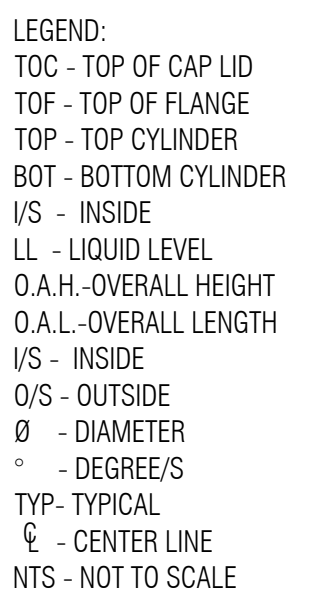


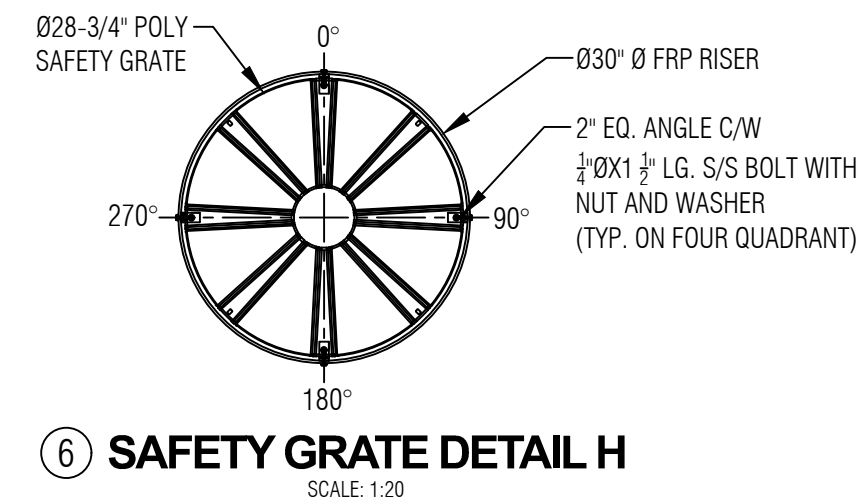

ITEM#	QTY	PART LIST	DESCRIPTION	SHELL THICKNESS:	0.375"	DRAWN:	CCL/ATF	CLIENT: FRP/MOCOAT				
1	1	30" CAP LID W/ 8"D POLY SCREW OUT INSERT		HEMI HEAD THICKNESS:	0.475"	CHECKED:	ATF	TITLE: B2500S FIBERGLASS HOLDING TANK				
2	1	30"Ø MANWAY COLLAR	30"Ø FRP COLLAR	RIBS THICKNESS:	0.25"	DATE:	DEC 6, 2024		FRP MOCOAT FIBERGLASS LTD.			
3	1	4" FERNCO	FLEXIBLE CONNECTOR	RIB SPACING:	24" (CL TO CL)	DESIGNED:	FRP					
4	1	4"Ø PVC PIPE & TEEWYE	INLET	LENGTH:	3,251MM (10'-8")	APPROVED:	MPS	SIZE	DRAWING NUMBER:			REVISION
5	2	MILD STEEL	LIFT LUGS	WORKING CAPACITY:	11,080L (2,437 IG/2,924 USG)	MFG:		C	B2500S			0
6	1	POLYETHYLENE SAFETY GRATE C/W HARDWARE	SAFETY GRATE	OVERALL CAPACITY:	11,365 L (2,500 IG/3,000 USG)	PM:		SCALE		WEIGHT:	544 KG (1,200 LBS)	SHEET
						SALES:		1:40		BURIAL DEPTH:	RATED 7'-0"	1/1