

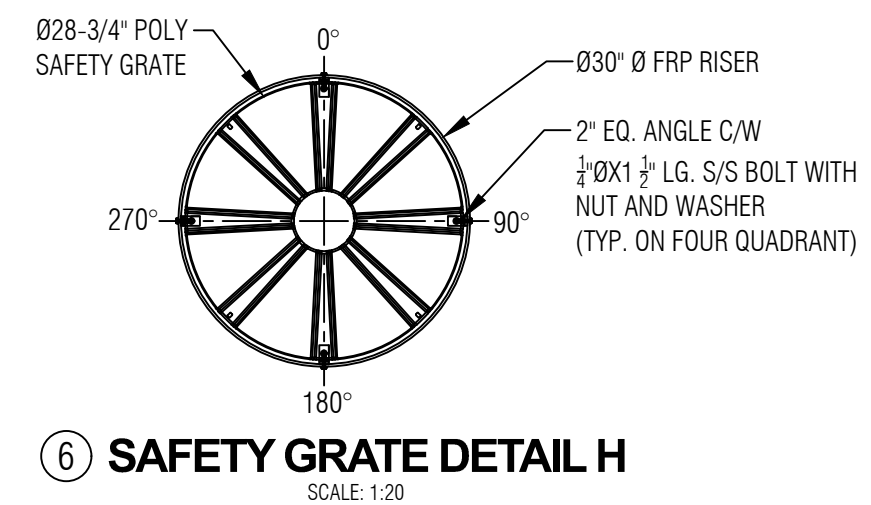
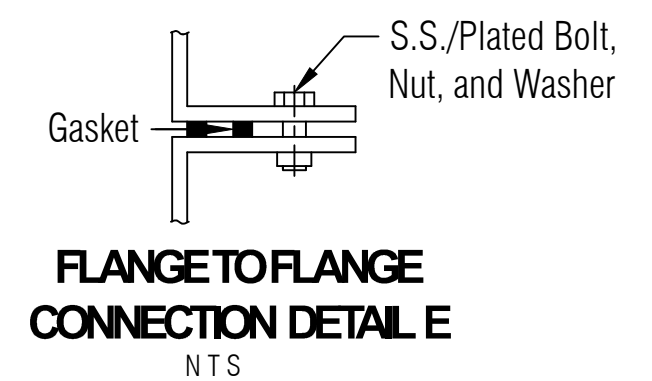
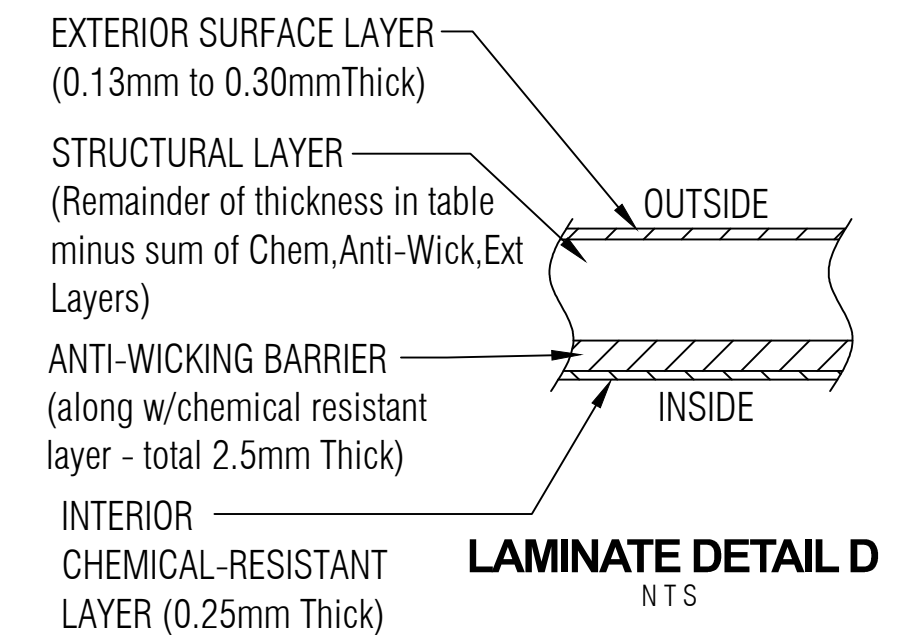
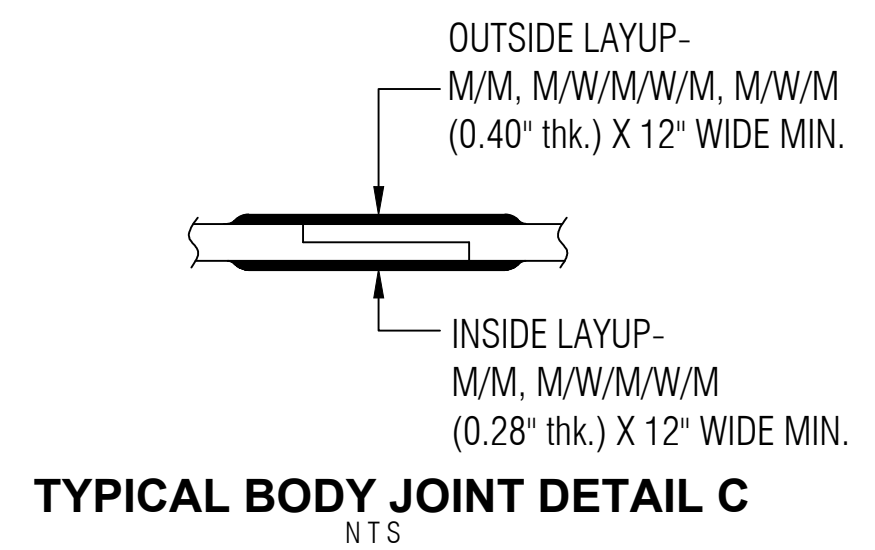
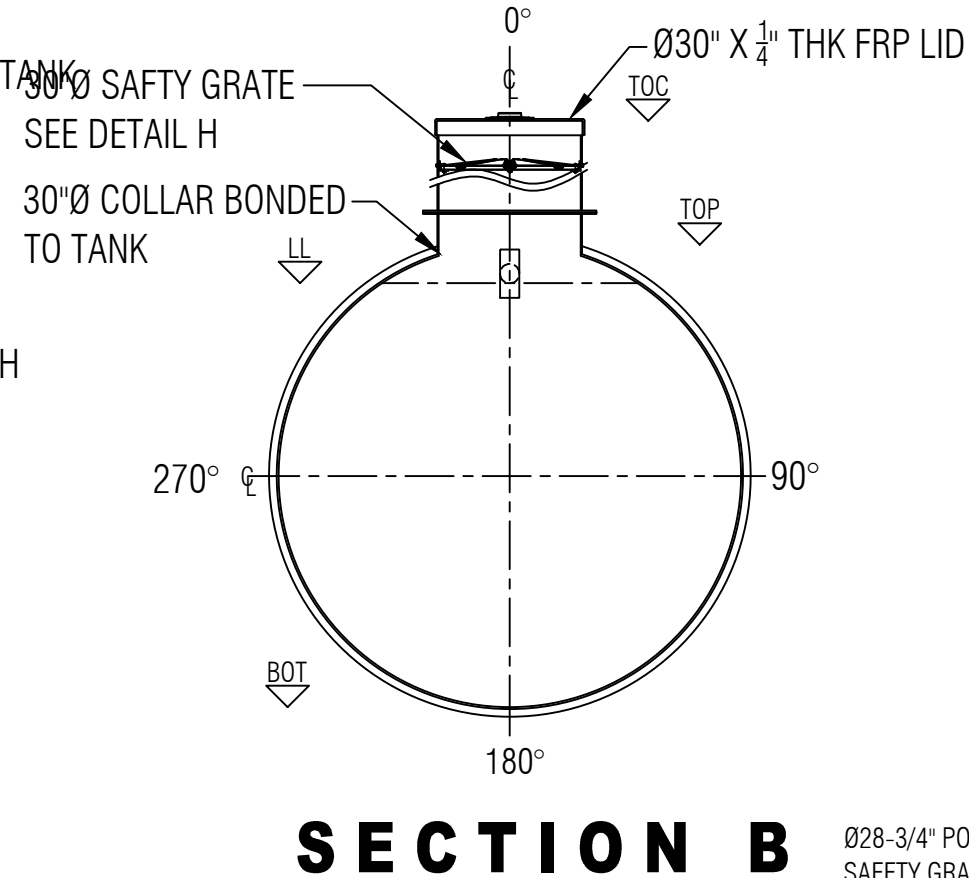
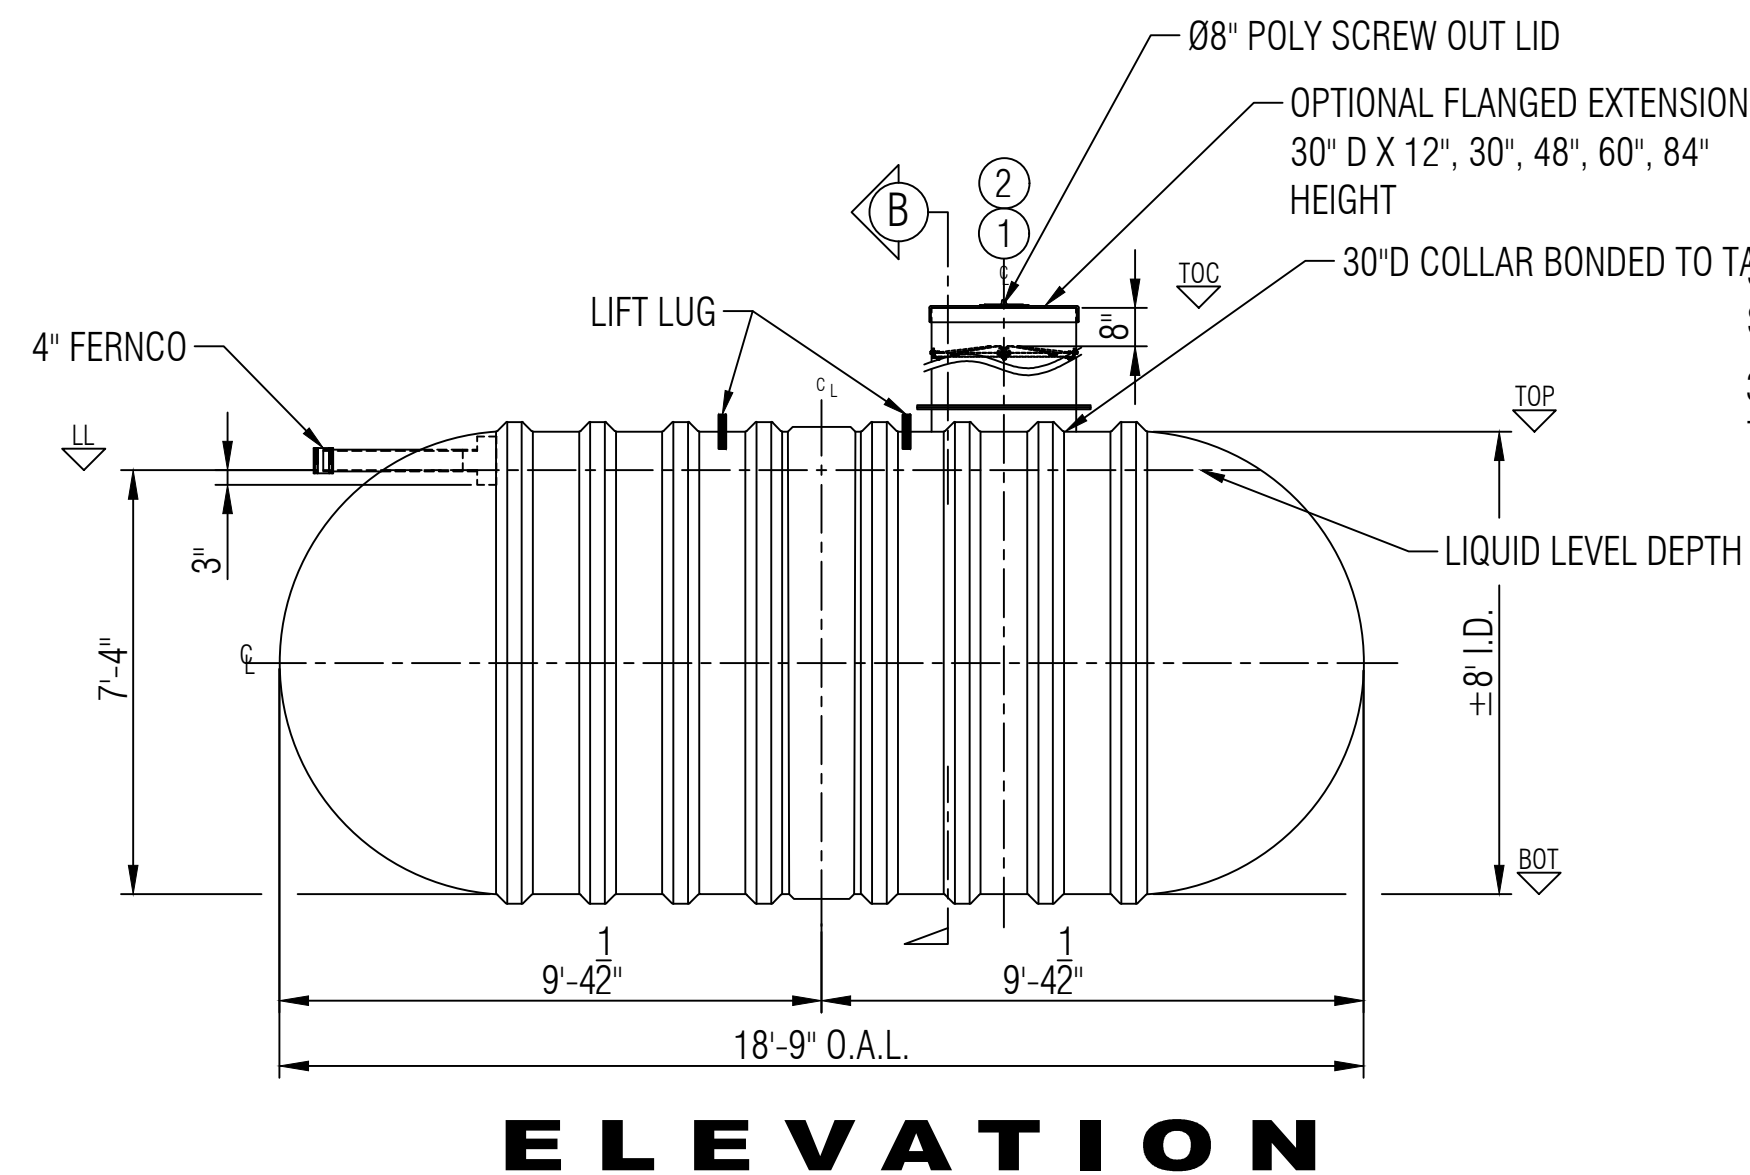


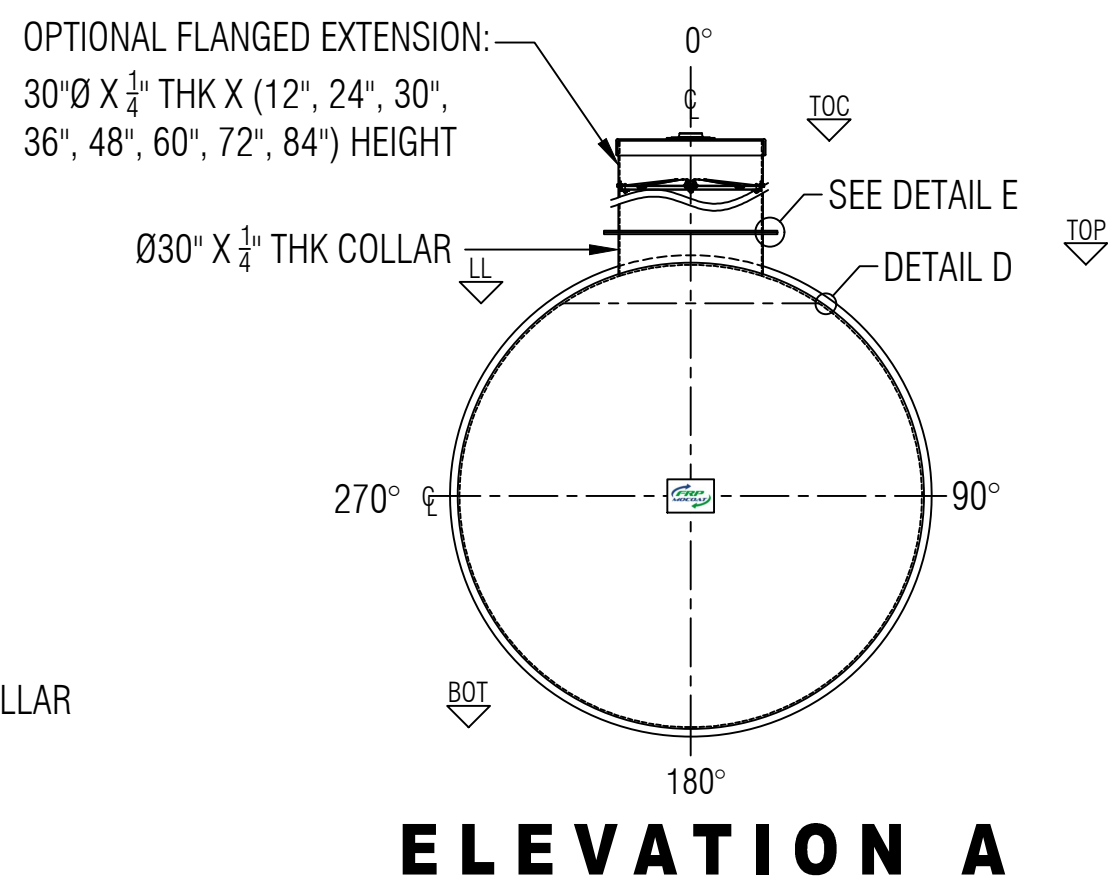

LEGEND:
TOC - TOP OF CAP LID
TOF - TOP OF FLANGE
TOP - TOP CYLINDER
BOT - BOTTOM CYLINDER
I/S - INSIDE
LL - LIQUID LEVEL
O.A.H.-OVERALL HEIGHT
O.A.L.-OVERALL LENGTH
I/S - INSIDE
O/S - OUTSIDE
Ø - DIAMETER
° - DEGREE/S
TYP- TYPICAL
CL - CENTER LINE
NTS - NOT TO SCALE

GENERAL NOTES:

- CSA B66 CERTIFIED FRP TANK FOR SEWAGE HOLDING TANK.
- RATED FOR 7' OF BURIAL DEPTH AND NO TRAFFIC LOADING.
- ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN.
- SAFETY GRATE CAN WITHSTAND 91 KG. OF DEAD LOAD.
- DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED.
- 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS.

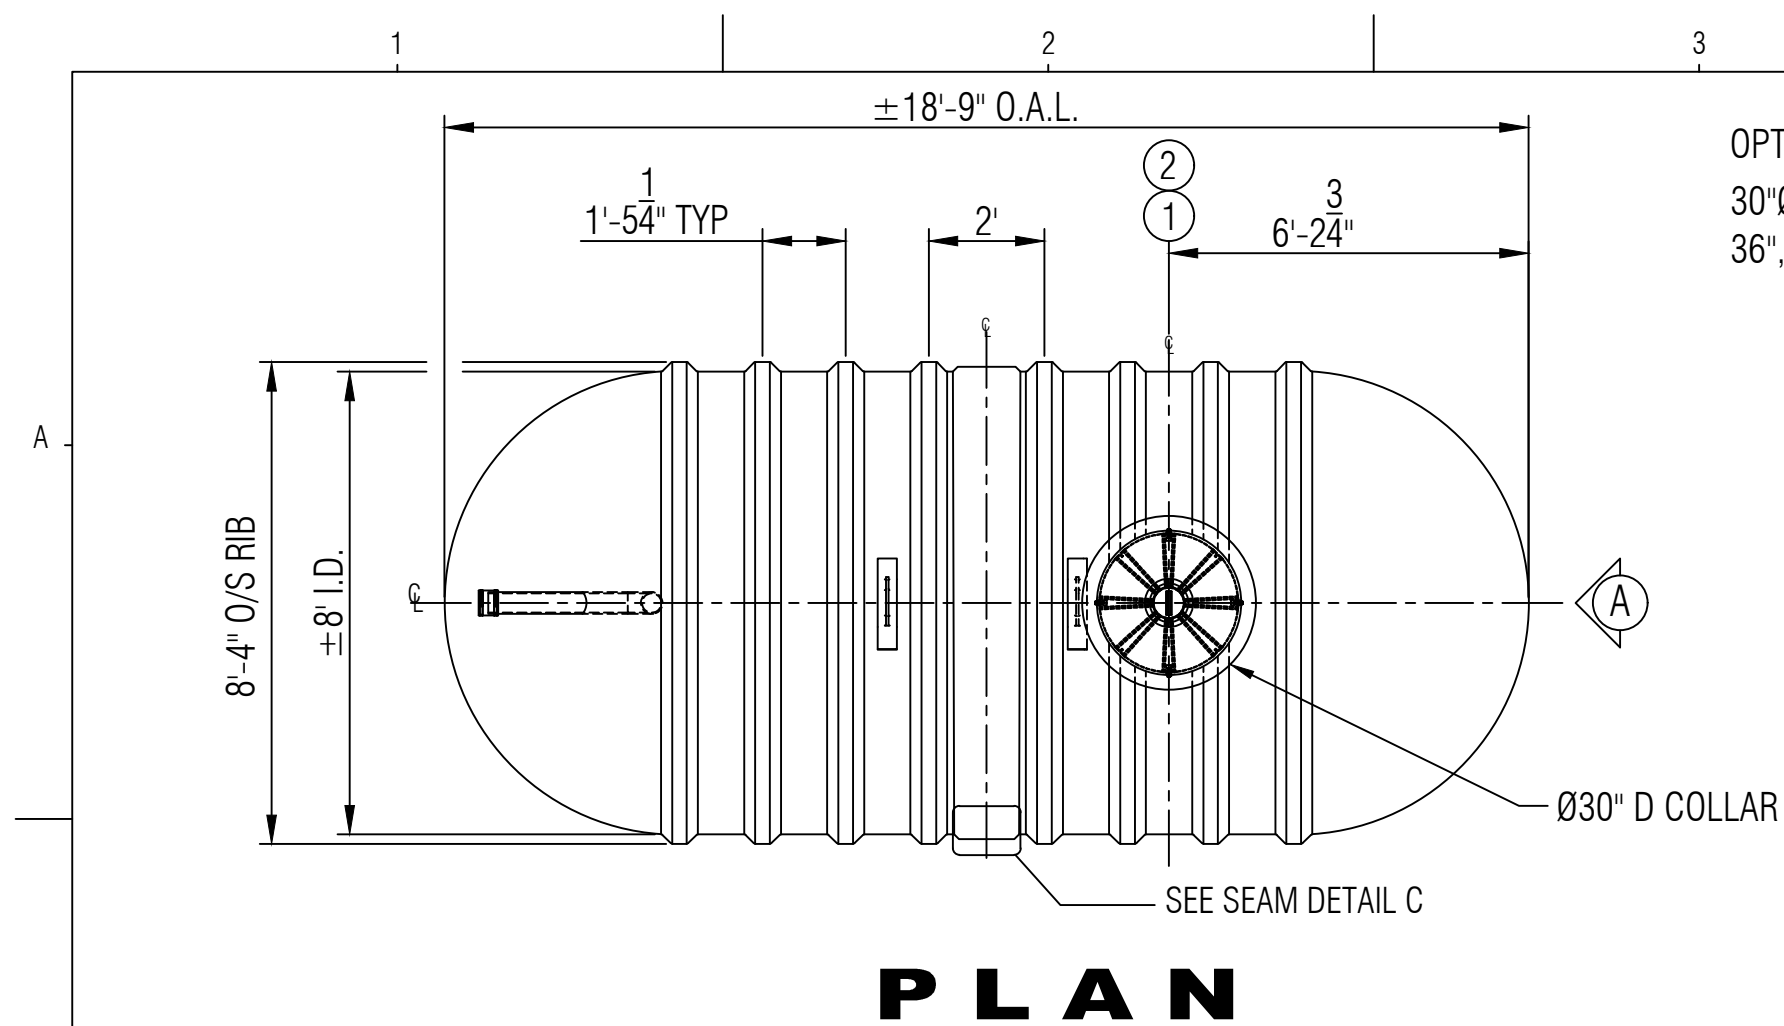

ITEM#	QTY	PART LIST	DESCRIPTION	SHELL THICKNESS:	0.375"	DRAWN:	CCL/ATF	CLIENT: FRP/MOCOAT			
1	1	30" CAP LID W/ 8"D POLY SCREW OUT INSERT		HEMI HEAD THICKNESS:	0.475"	CHECKED:	ATF	TITLE: B5000S FIBERGLASS HOLDING TANK		FRP MOCOAT FIBERGLASS LTD.	
2	1	30"Ø MANWAY COLLAR	30"Ø FRP COLLAR	RIBS THICKNESS:	0.25"	DATE:	DEC 6, 2024				
3	1	4" FERNCO	FLEXIBLE CONNECTOR	RIB SPACING:	17-1/4" (CL to CL)	DESIGNED:	FRP				
4	1	4"Ø PVC PIPE & TEEWYE	INLET	LENGTH:	5,715MM (18'-9")	APPROVED:	MPS	SIZE	DRAWING NUMBER:		REVISION
5	2	MILD STEEL	LIFT LUGS	WORKING CAPACITY:	22,180L (4,879IG/5,859USG)	MFG:		C	B5000S		0
6	1	POLYETHYLENE SAFETY GRATE C/W HARDWARE	SAFETY GRATE	OVERALL CAPACITY:	22,886 L (5,034 IG/6,040 USG)	PM:		SCALE	WEIGHT:	975 KG (2,150 LBS)	SHEET
						SALES:		1:40	BURIAL DEPTH:	RATED 7'-0"	1/1