

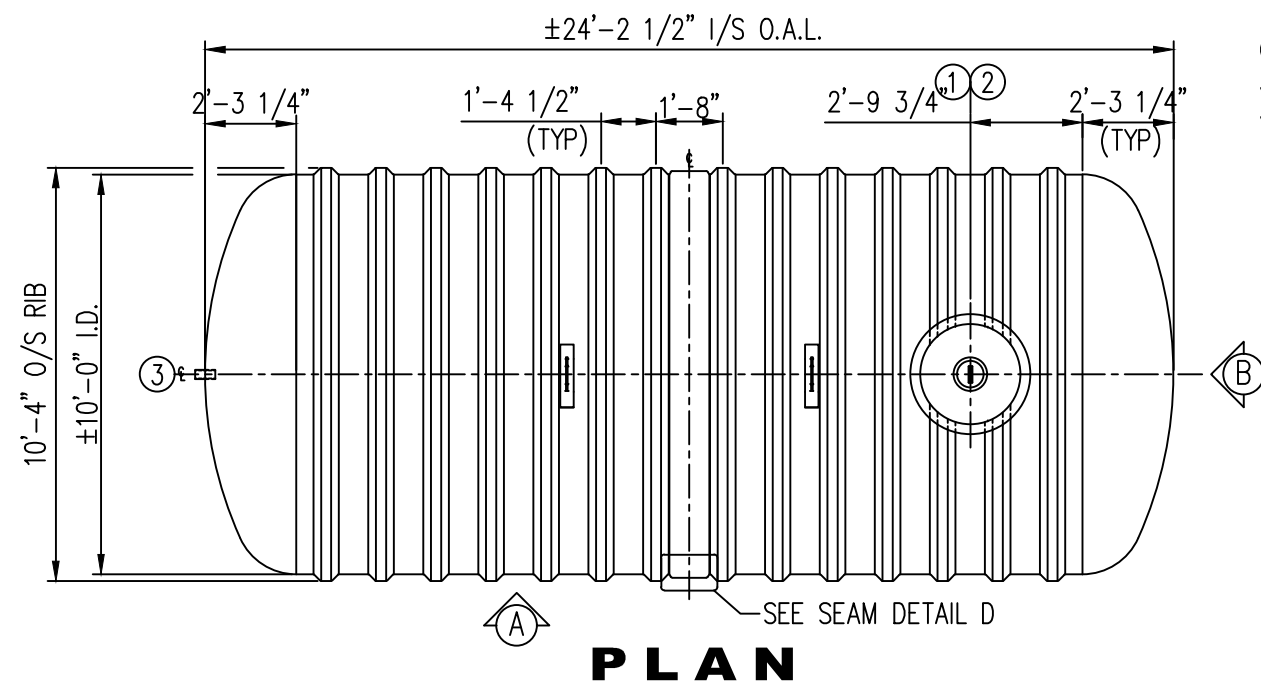
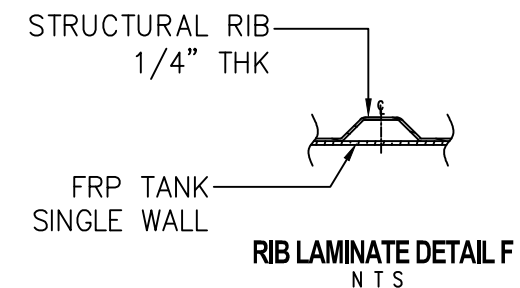
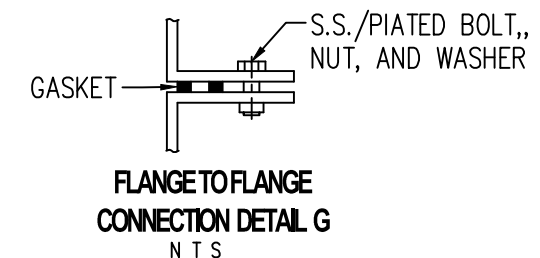
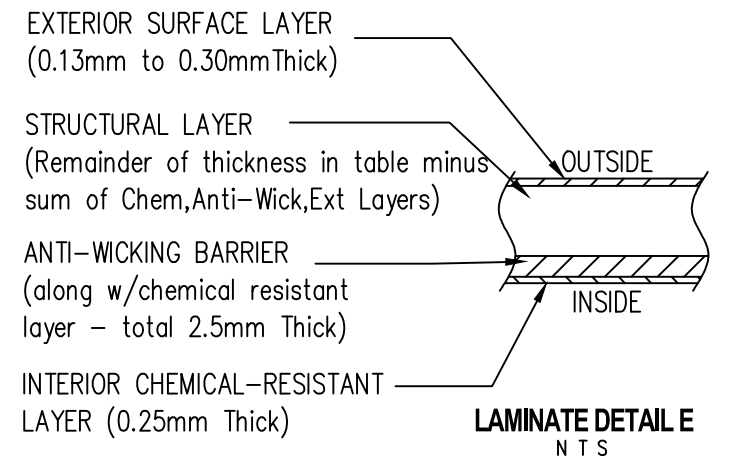
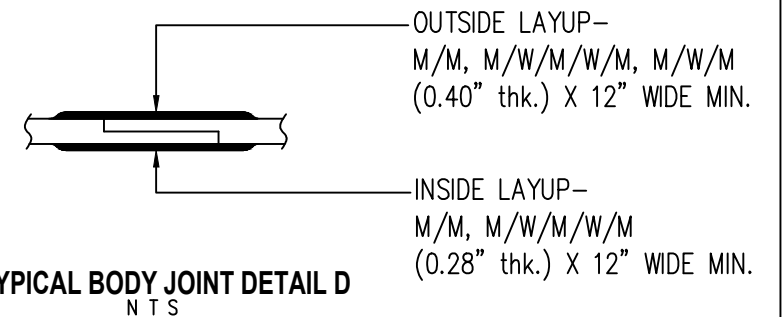
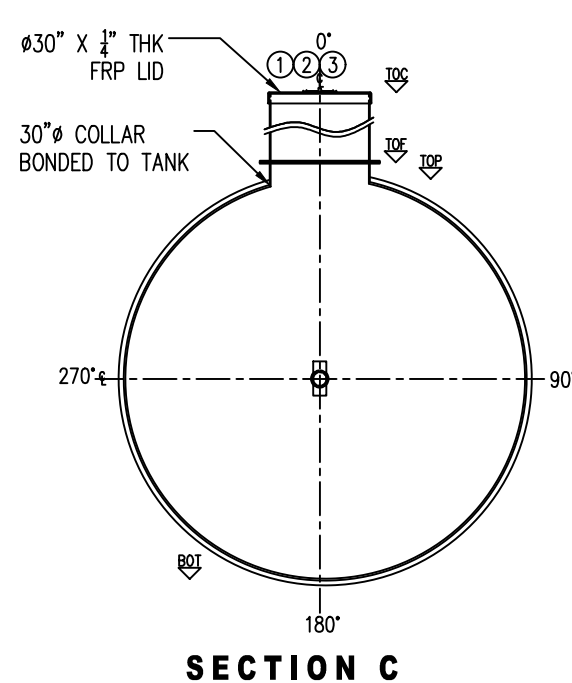


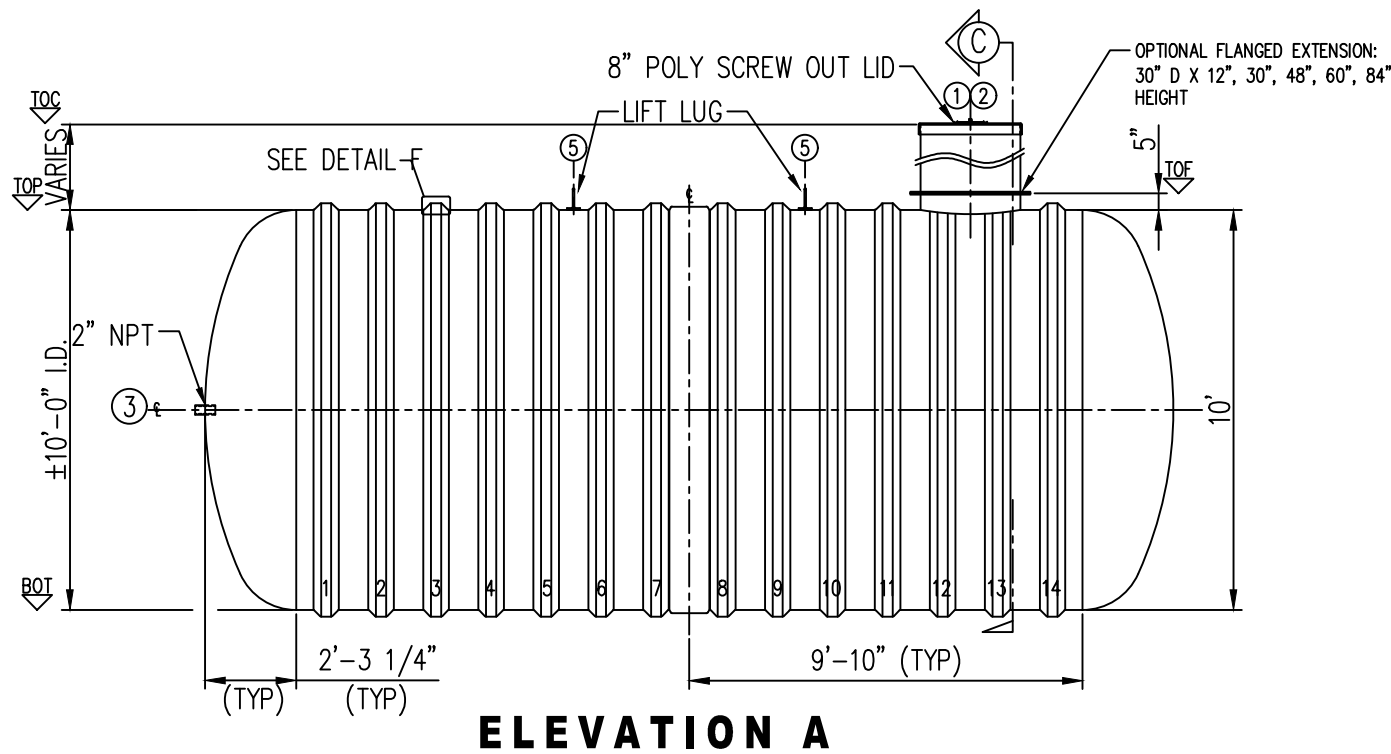

OPTIONAL FLANGED EXTENSION:
30" ϕ X $\frac{1}{4}"$ THK X (12", 24", 30",
36", 48", 60", 72", 84") HEIGHT

$\phi 30"$ X $\frac{1}{4}"$ THK COLLAR

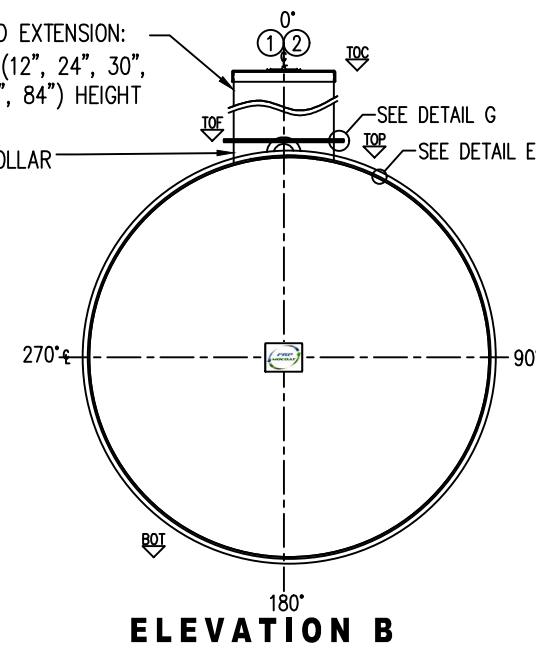

LEGEND:
TOC - TOP OF CAP LID
TOF - TOP OF FLANGE
TOP - TOP CYLINDER
BOT - BOTTOM CYLINDER
I/S - INSIDE
LL - LIQUID LEVEL
O.A.H.-OVERALL HEIGHT
O.A.L.-OVERALL LENGTH
I/S - INSIDE
O/S - OUTSIDE
 ϕ - DIAMETER
° - DEGREE/S
TYP- TYPICAL
CL - CENTER LINE
NTS - NOT TO SCALE

GENERAL NOTES		ITEM#		QTY		PART LIST		DESCRIPTION		SHELL THICKNESS:		DRAWN:		EA/ATF		CLIENT:		FRP/MOCOAT FIBERGLASS LTD.	
- CSA ANSI/NSF 61 CERTIFIED FRP POTABLE WATER TANK. - RATED FOR 7' OF BURIAL DEPTH AND NO TRAFFIC LOADING. - ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN.. - DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED. - 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS.		1	1	30"CAP LID W/ 8"D POLY SCREW OUT INSERT, VENTED		FRP LID		HEMI HEAD THICKNESS:	0.940"			CHECKED:	MPS			TITLE:		BX11000W FRP POTABLE WATER TANK	
		2	1	30" MANWAY COLLAR		30" ϕ FRP MANWAY		RIBS THICKNESS:	0.25"			DATE:	AUG. 15, 2025			FRPMOCOAT FIBERGLASS LTD.		SIZE:	
		3	1	2" FRP NPT CONNECTION		OUTLET		RIB SPACING:	16 1/2" CL TO CL			DESIGNED:	FRP			DRAWING NUMBER:		BX11000W	
		4	2	CARBON STEEL LIFT LUG		LIFT LUG		WEIGHT:	2,155 KG (4,750 LBS)			APPROVED:	MPS			REVISION:		0	
		5						LENGTH:	7,378MM (24'-2 1/2")			MFG.:	DS			SCALE:		1/1	
		6						WORKING CAPACITY:	N/A			QA:	GA			WEIGHT:		2,155 KG (4,750 LBS)	
		7						OVERALL CAPACITY:	50,220 L (11,046 IG/13,255 USG)			SALES:	TA			BURIAL DEPTH:		RATED 7'-0"	