




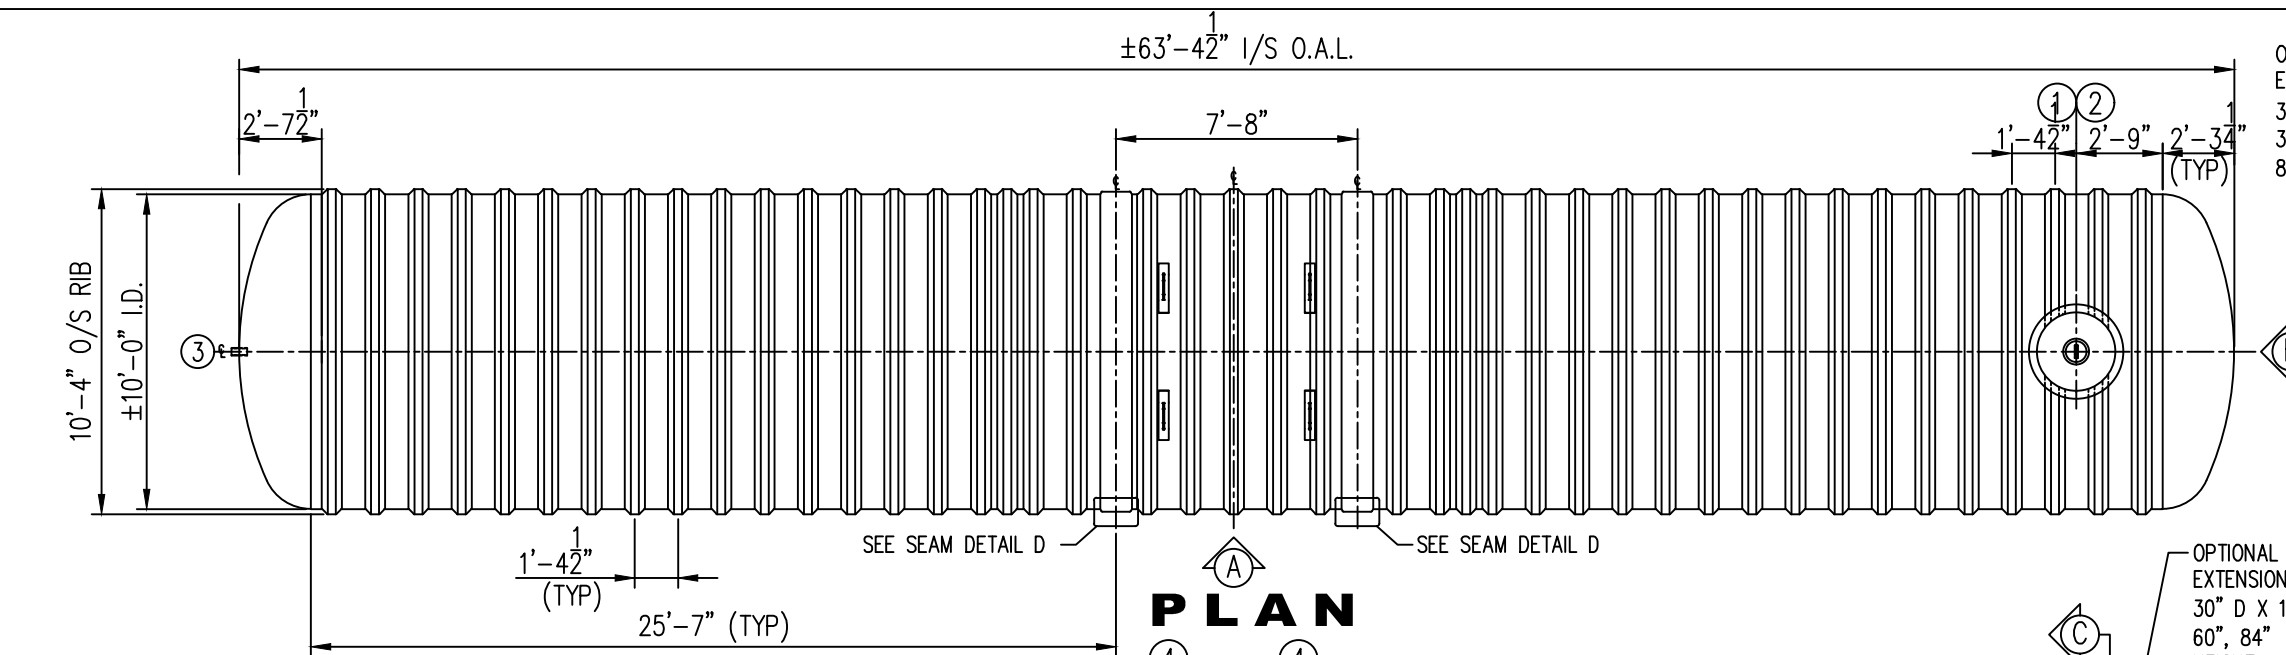


PLAN

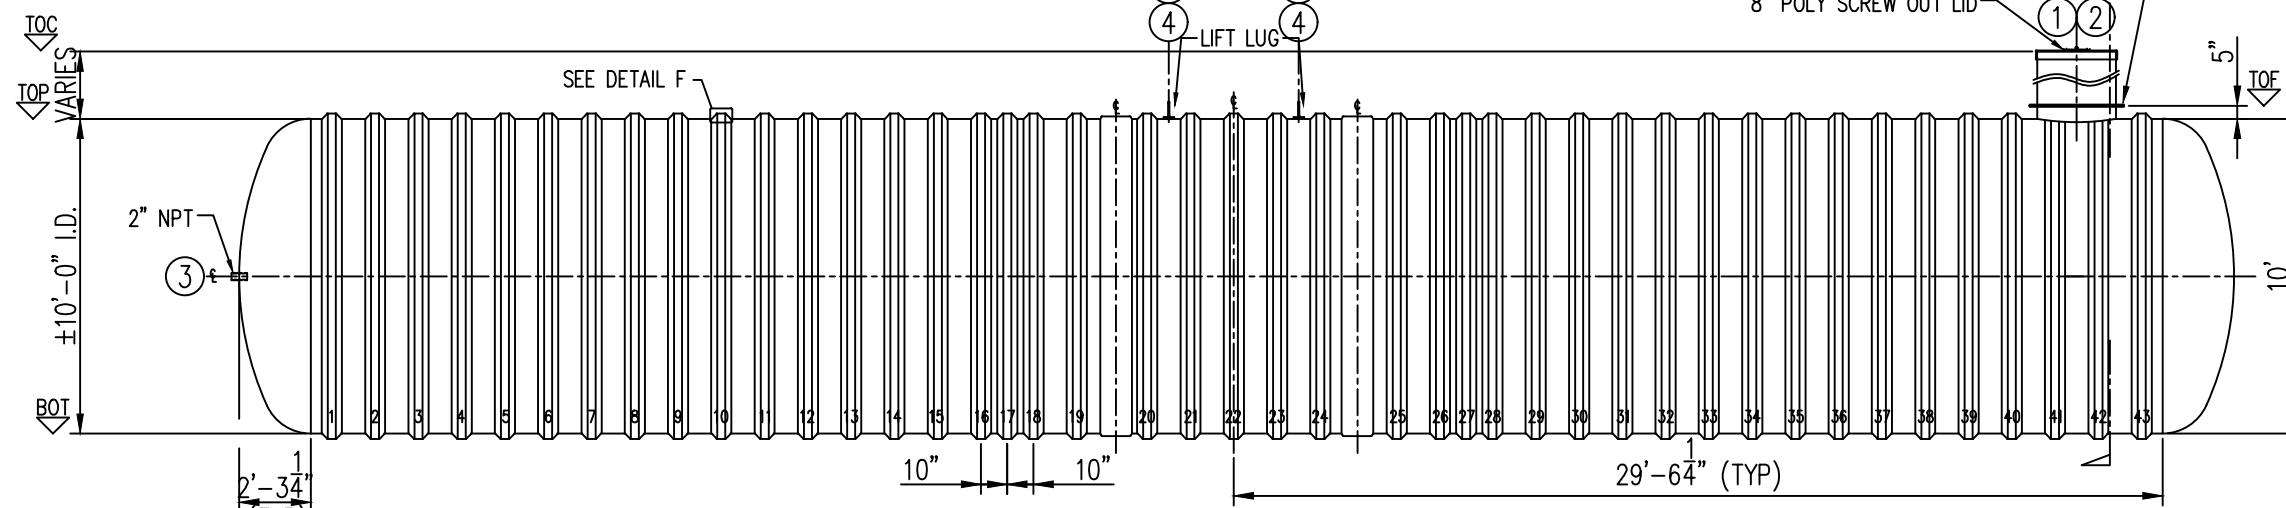





ELEVATION A

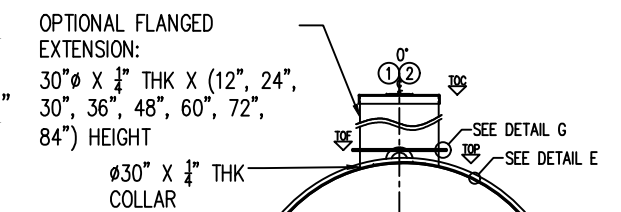

ELEVATION B

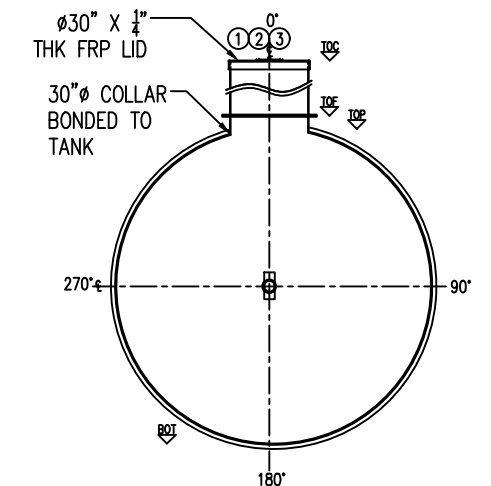

SECTION C

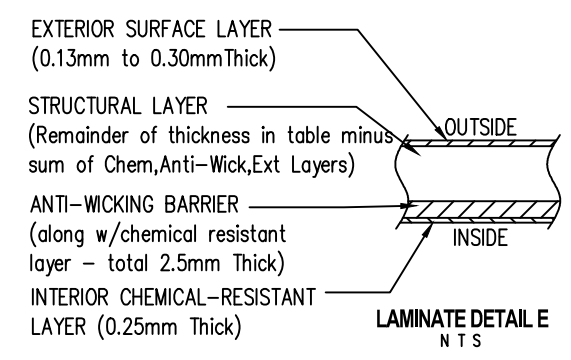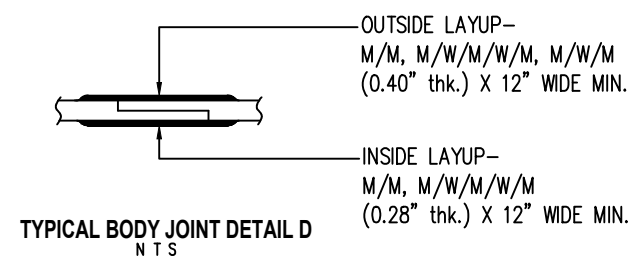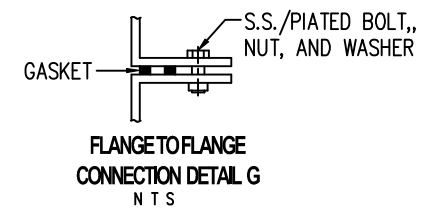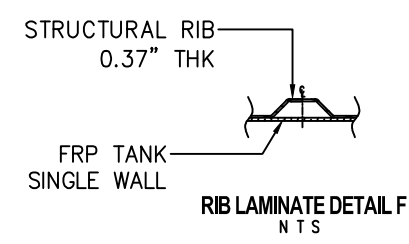

LEGEND:
TOC - TOP OF CAP LID
TOF - TOP OF FLANGE
TOP - TOP CYLINDER
BOT - BOTTOM CYLINDER
I/S - INSIDE
LL - LIQUID LEVEL
O.A.H.-OVERALL HEIGHT
O.A.L.-OVERALL LENGTH
I/S - INSIDE
O/S - OUTSIDE
Ø - DIAMETER
° - DEGREE/S
TYP- TYPICAL
CL - CENTER LINE
NTS - NOT TO SCALE

GENERAL NOTES				ITEM#	QTY	PART LIST	DESCRIPTION	SHELL THICKNESS:	0.500"	DRAWN:	EA/ATF		CLIENT:	FRP/MOCOAT FIBERGLASS LTD.		
- CSA ANSI/NSF 61 CERTIFIED FRP POTABLE WATER TANK. - RATED FOR 10' OF BURIAL DEPTH AND NO TRAFFIC LOADING. - ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN.. - DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED. - 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS.				1	1	30"CAP LID W/ 8"D POLY SCREW OUT INSERT, VENTED	FRP LID	HEMI HEAD THICKNESS:	1.030"	CHECKED:	MPS		TITLE:	BX30000W- DB FRP POTABLE WATER TANK		
				2	1	30" MANWAY COLLAR	30"Ø FRP MANWAY	RIBS THICKNESS:	0.300"+2 WR (0.066")= .366"	DATE:	AUG. 19,2025			FRPMOCOAT FIBERGLASS LTD.		
				3	1	2" FRP NPT CONNECTION	OUTLET	RIB SPACING:	16 1/2" CL TO CL	DESIGNED:	FRP					
				4	4	CARBON STEEL LIFT LUG	LIFT LUG	WEIGHT:	5,740 KG (12,627 LBS)	APPROVED:	MPS					
				5				LENGTH:	19,317MM (63'-4 1/2")	MFG.:	DS					
				6				WORKING CAPACITY:	N/A	QA:	GA					
7				OVERALL CAPACITY:	137,300 L (30,202IG/36,424 USG)	SALES:	TA	SCALE:		DRAWING NUMBER:		BX30000W- DB	REVISION:	0		
												SHEET:		1/1		
												WEIGHT:		5,740 KG (12,627 LBS)		
												BURIAL DEPTH:		RATED 10'- 0"		