
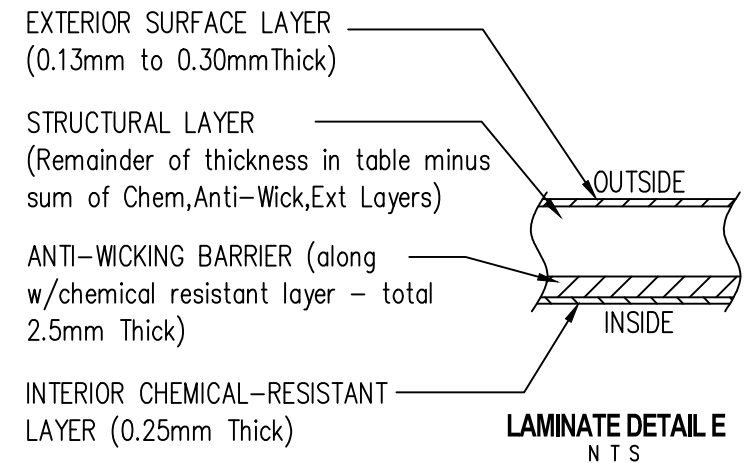
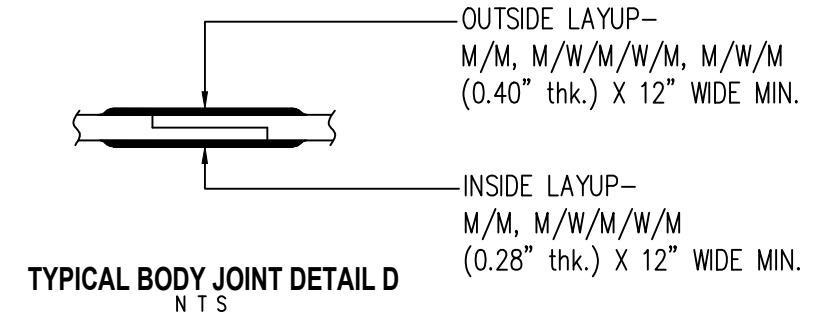
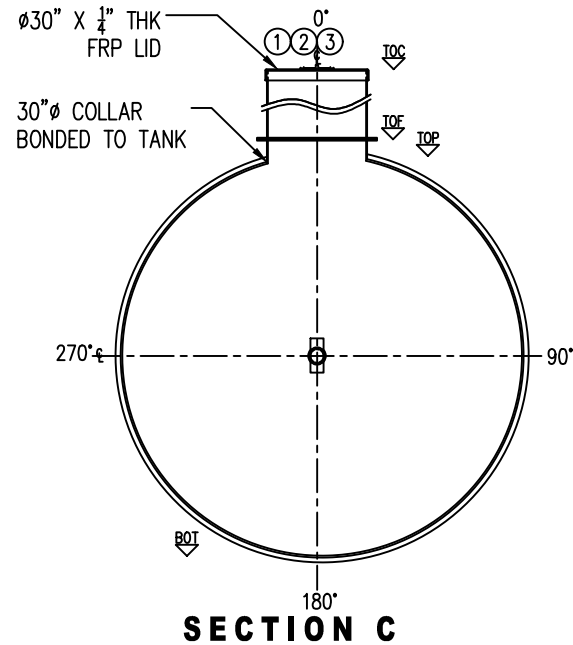
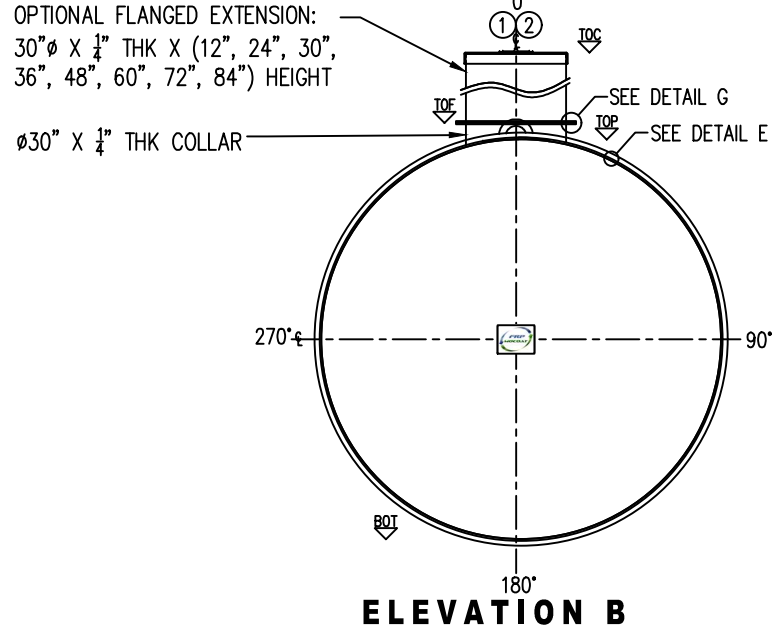
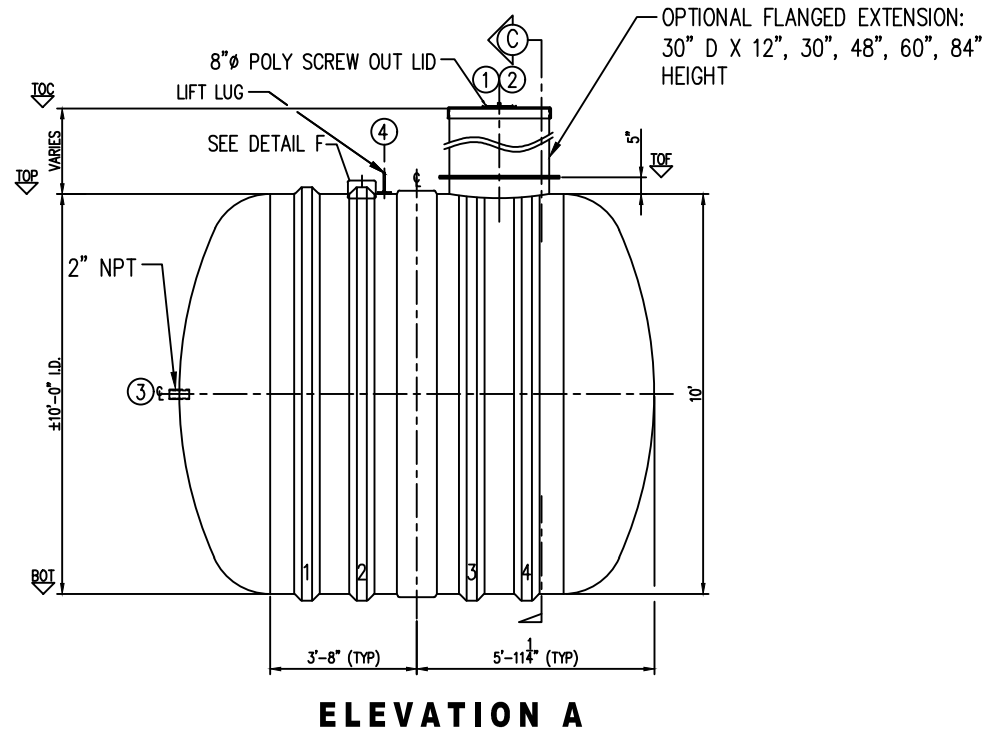


LEGEND:  
TOC - TOP OF CAP LID  
TOF - TOP OF FLANGE  
TOP - TOP CYLINDER  
BOT - BOTTOM CYLINDER  
I/S - INSIDE  
LL - LIQUID LEVEL  
O.A.H.-OVERALL HEIGHT  
O.A.L.-OVERALL LENGTH  
I/S - INSIDE  
O/S - OUTSIDE  
Ø - DIAMETER  
° - DEGREE/S  
TYP- TYPICAL  
CL - CENTER LINE  
NTS - NOT TO SCALE

| GENERAL NOTES                                                       |  |
|---------------------------------------------------------------------|--|
| - CSA ANSI/NSF 61 CERTIFIED FRP POTABLE WATER TANK.                 |  |
| - RATED FOR 7' OF BURIAL DEPTH AND NO TRAFFIC LOADING.              |  |
| - ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN..               |  |
| - DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED.           |  |
| - 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS. |  |

| ITEM# | QTY | PART LIST                                       | DESCRIPTION     |
|-------|-----|-------------------------------------------------|-----------------|
| 1     | 1   | 30"CAP LID W/ 8"D POLY SCREW OUT INSERT, VENTED | FRP LID         |
| 2     | 1   | 30" MANWAY COLLAR                               | 30"Ø FRP MANWAY |
| 3     | 1   | 2" FRP NPT CONNECTION                           | OUTLET          |
| 4     | 1   | CARBON STEEL LIFT LUG                           | LIFT LUG        |
| 5     |     |                                                 |                 |
| 6     |     |                                                 |                 |
| 7     |     |                                                 |                 |

|                      |                               |           |              |
|----------------------|-------------------------------|-----------|--------------|
| SHELL THICKNESS:     | 0.400"                        | DRAWN:    | EA/ATF       |
| HEMI HEAD THICKNESS: | 0.940"                        | CHECKED:  | MPS          |
| RIBS THICKNESS:      | 0.25"                         | DATE:     | AUG. 15,2025 |
| RIB SPACING:         | 16 1/2" CL TO CL              | DESIGNED: | FRP          |
| WEIGHT:              | 1,293 KG (2,850 LBS))         | APPROVED: | MPS          |
| LENGTH:              | 3,619MM (11'-10 1/2")         | MFG.:     | DS           |
| WORKING CAPACITY:    | N/A                           | QA:       | GA           |
| OVERALL CAPACITY:    | 22,980 L (5,055 IG/6,066 USG) | SALES:    | TA           |

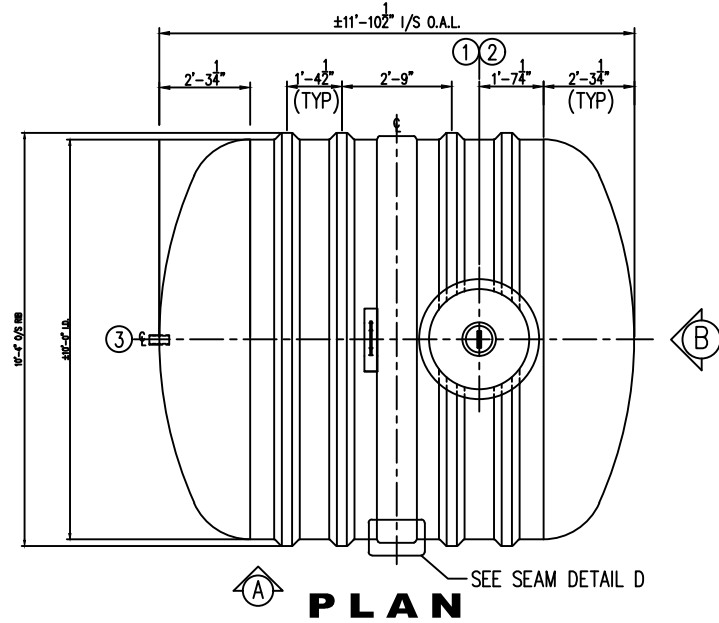

|                                              |                              |             |  |
|----------------------------------------------|------------------------------|-------------|--|
| CLIENT: FRP/MOCOAT FIBERGLASS LTD.           |                              |             |  |
| TITLE: <b>BX5000W FRP POTABLE WATER TANK</b> |                              |             |  |
| <b>FRPMOCOAT</b><br>FIBERGLASS LTD.          |                              |             |  |
| SIZE: B                                      | DRAWING NUMBER: BX5000W      | REVISION: 0 |  |
| SCALE: .                                     | WEIGHT: 1,293 KG (2,850 LBS) | SHEET: 1/1  |  |
|                                              | BURIAL DEPTH: RATED 7'- 0"   |             |  |