

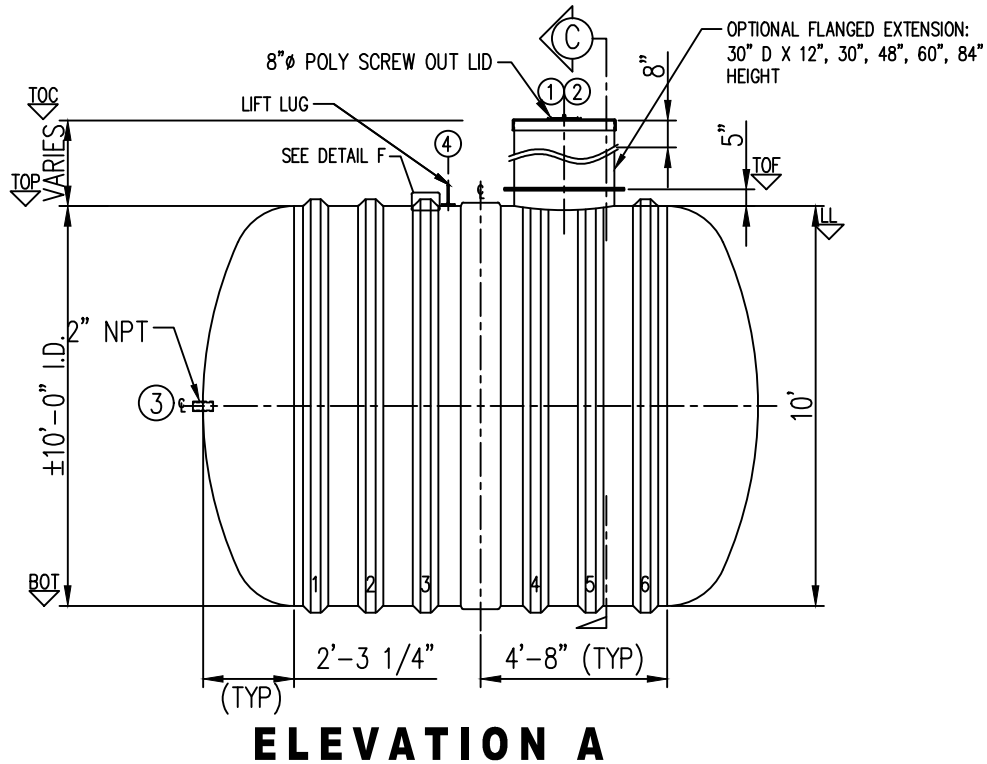
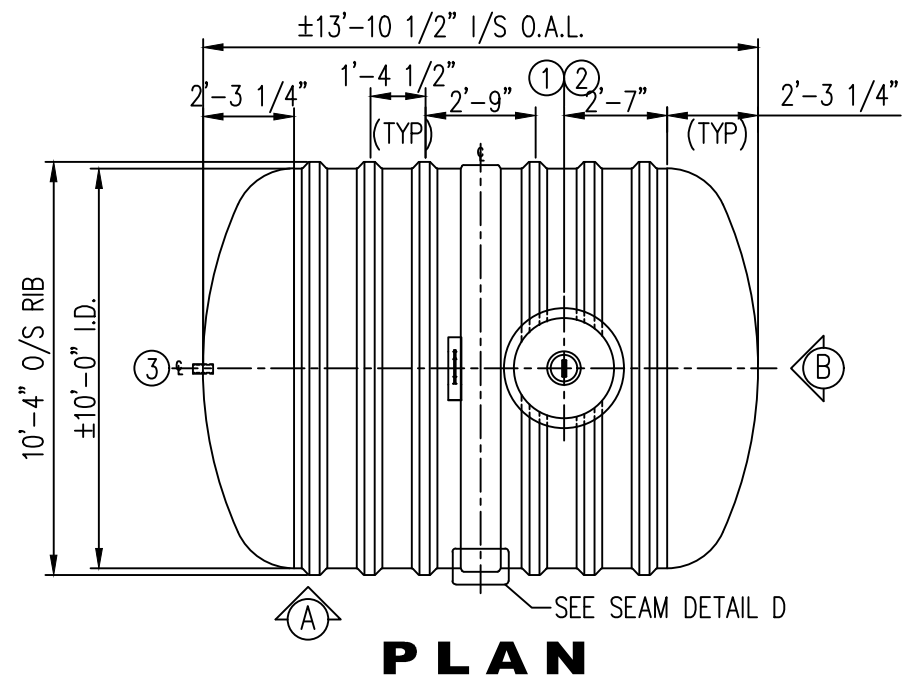
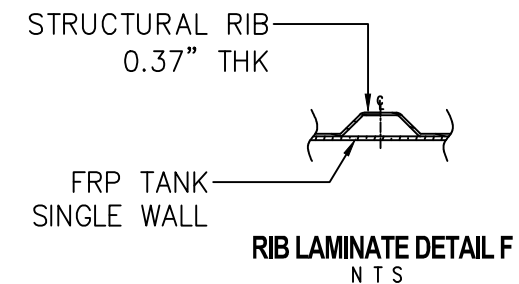
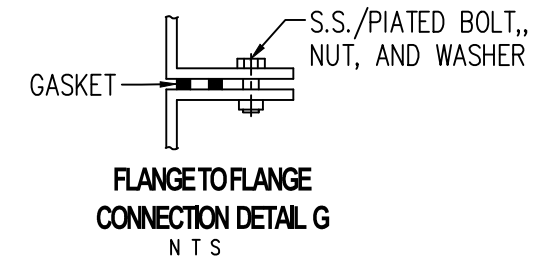
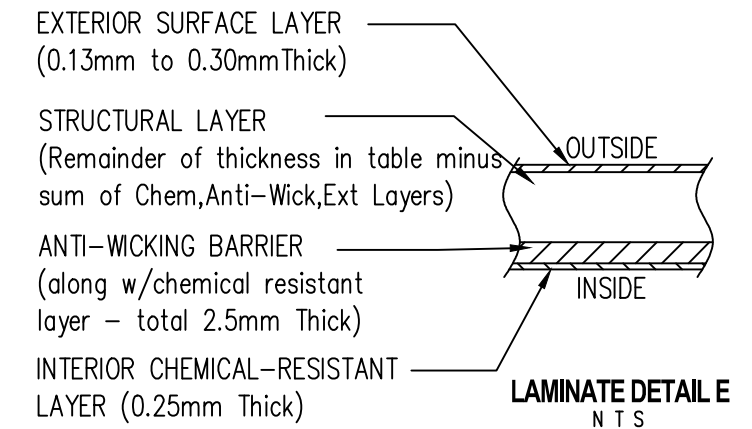
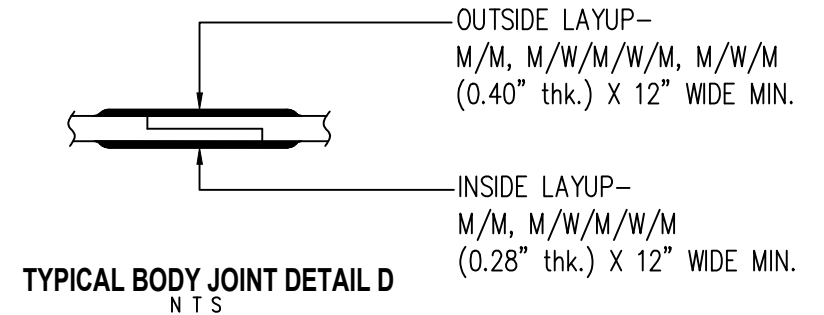


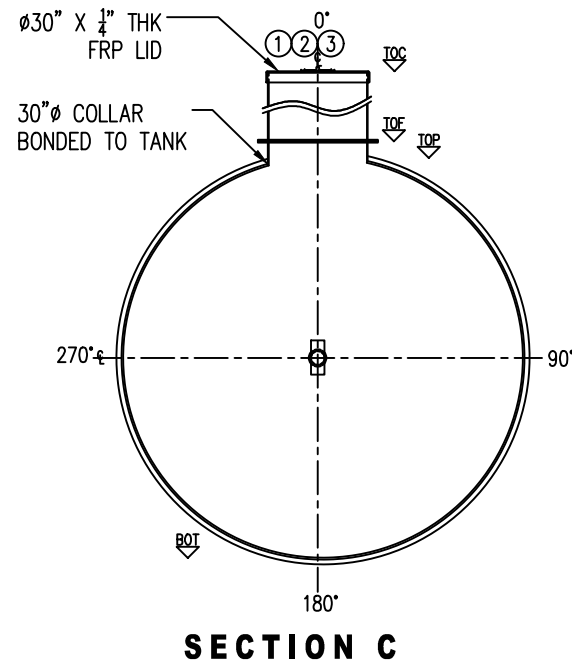

OPTIONAL FLANGED EXTENSION:
30"Ø X 1/4" THK X (12", 24", 30",
36", 48", 60", 72", 84") HEIGHT

Ø30" X 1/4" THK COLLAR

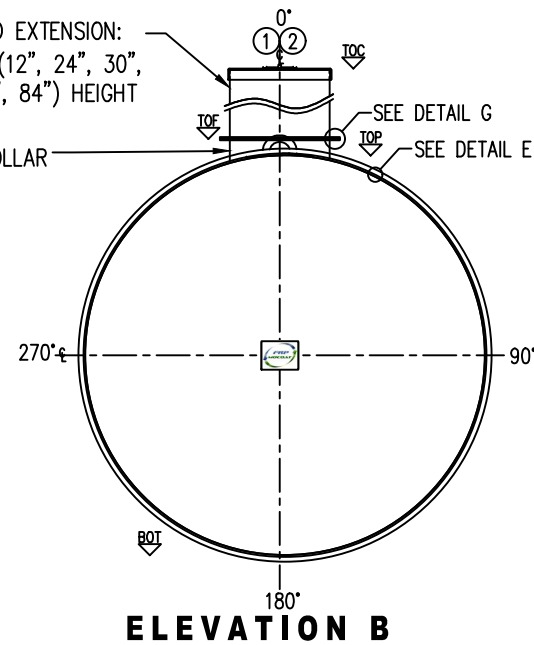

LEGEND:
TOC - TOP OF CAP LID
TOF - TOP OF FLANGE
TOP - TOP CYLINDER
BOT - BOTTOM CYLINDER
I/S - INSIDE
LL - LIQUID LEVEL
O.A.H.-OVERALL HEIGHT
O.A.L.-OVERALL LENGTH
I/S - INSIDE
O/S - OUTSIDE
Ø - DIAMETER
° - DEGREE/S
TYP- TYPICAL
CL - CENTER LINE
NTS - NOT TO SCALE

GENERAL NOTES		ITEM#	QTY	PART LIST	DESCRIPTION	SHELL THICKNESS:	0.425"	DRAWN:	EA/ATF		CLIENT: FRP/MOCOAT FIBERGLASS LTD.			
- CSA ANSI/NSF 61 CERTIFIED FRP POTABLE WATER TANK. - RATED FOR 10' OF BURIAL DEPTH AND NO TRAFFIC LOADING. - ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN.. - DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED. - 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS.		1	1	30"CAP LID W/ 8"D POLY SCREW OUT INSERT, VENTED	FRP LID	HEMI HEAD THICKNESS:	1.030"	CHECKED:	MPS		TITLE: BX6000W- DB FRP POTABLE WATER TANK			
		2	1	30" MANWAY COLLAR	30"Ø FRP MANWAY	RIBS THICKNESS:	0.300" +2 WR (0.066")=.366"	DATE:	AUG. 15,2025		 FRPMOCOAT FIBERGLASS LTD.			
		3	1	2" FRP NPT CONNECTION	OUTLET	RIB SPACING:	16 1/2" CL TO CL	DESIGNED:	FRP					
		4	1	CARBON STEEL LIFT LUG	LIFT LUG	WEIGHT:	1,629 KG (3,583 LBS)	APPROVED:	MPS		SIZE:	DRAWING NUMBER:	REVISION:	
		5				LENGTH:	4,229MM (13'-10 1/2")	MFG.:	DS		B	BX6000W- DB	0	
		6				WORKING CAPACITY:	N/A	QA:	GA		SCALE:	WEIGHT:	1,629 KG (3,583 LBS)	SHEET:
		7				OVERALL CAPACITY:	27,430 L (6,034 IG/7,240 USG)	SALES:	TA		BURIAL DEPTH:	RATED 10'- 0"	1/1	