

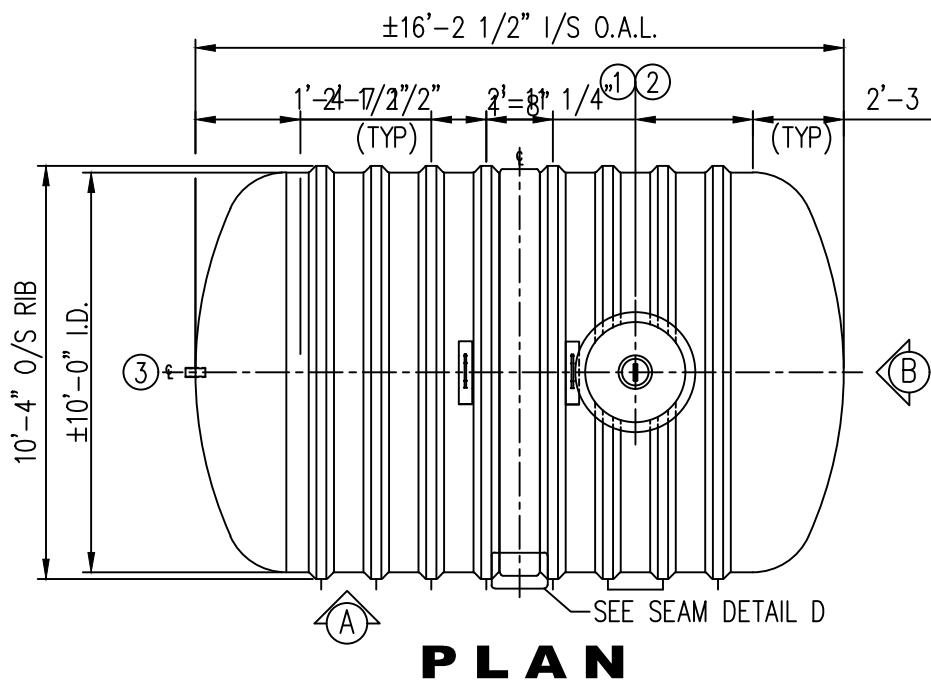
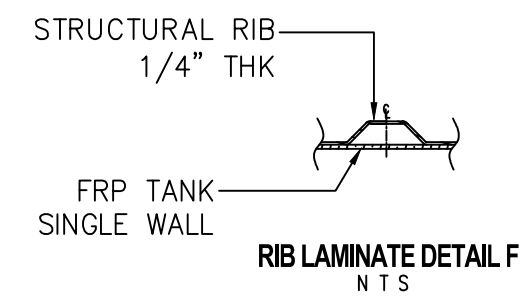
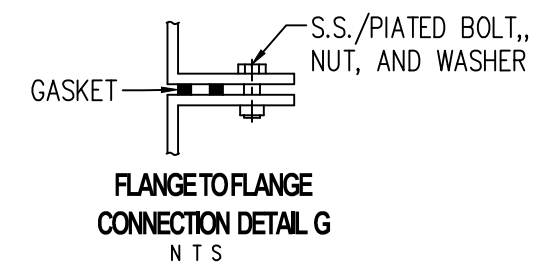
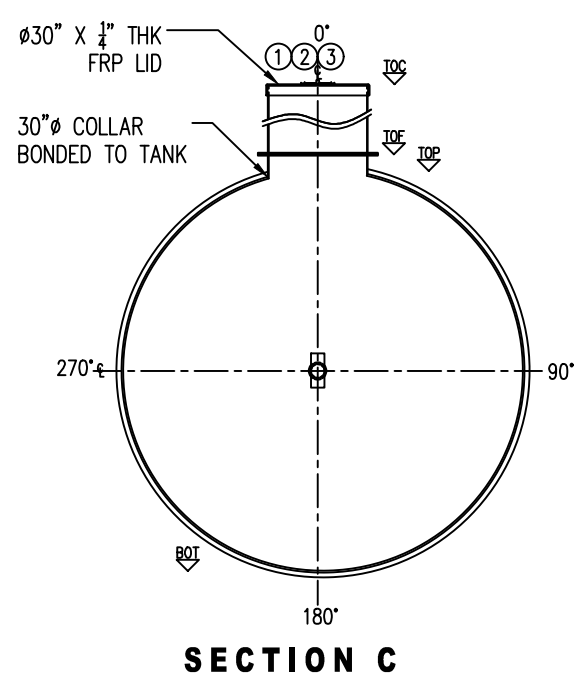
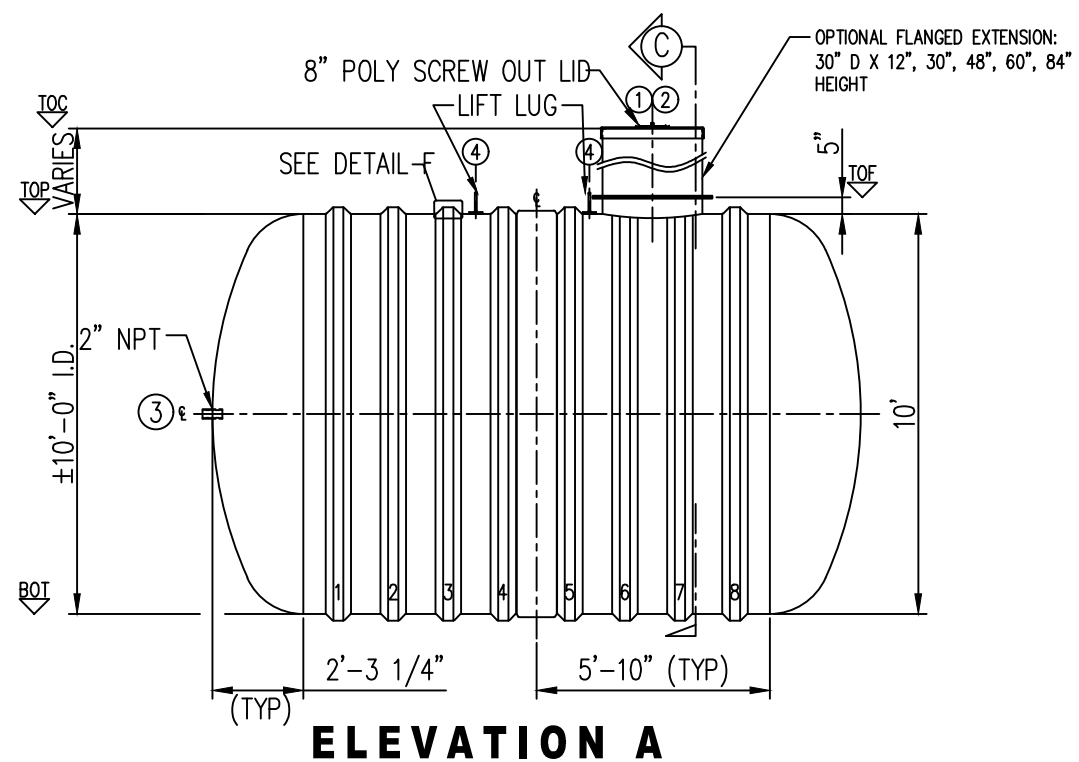
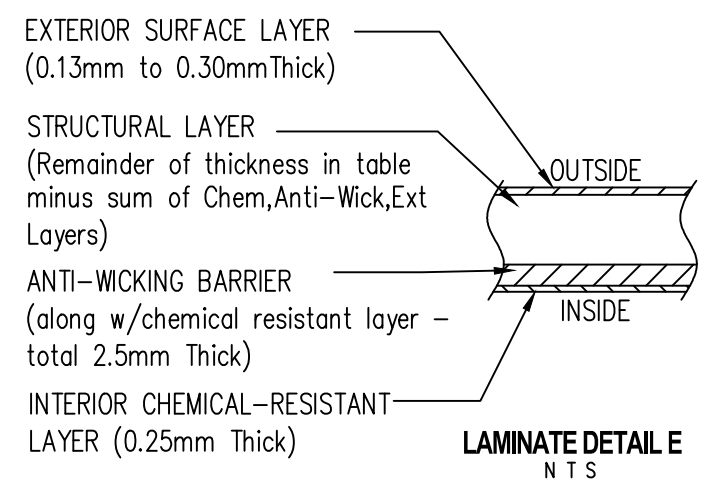


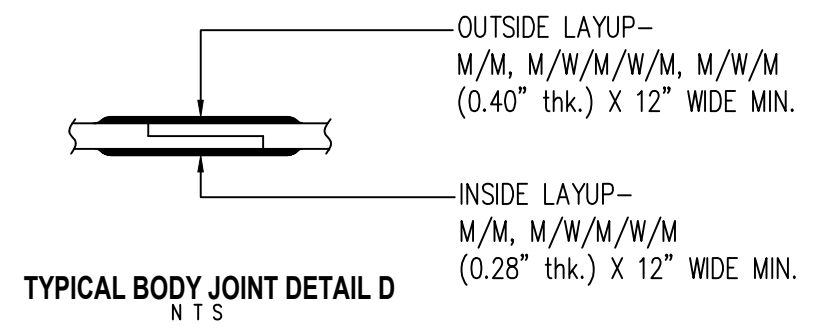

OPTIONAL FLANGED EXTENSION:
30" Ø X 1/4" THK X (12", 24", 30",
36", 48", 60", 72", 84") HEIGHT

Ø30" X 1/4" THK COLLAR

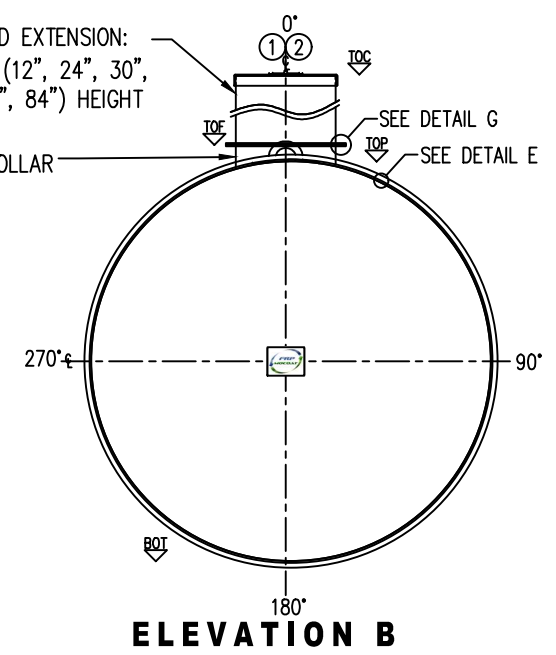

LEGEND:
TOC - TOP OF CAP LID
TOF - TOP OF FLANGE
TOP - TOP CYLINDER
BOT - BOTTOM CYLINDER
I/S - INSIDE
LL - LIQUID LEVEL
O.A.H.-OVERALL HEIGHT
O.A.L.-OVERALL LENGTH
I/S - INSIDE
O/S - OUTSIDE
Ø - DIAMETER
° - DEGREE/S
TYP- TYPICAL
CL - CENTER LINE
NTS - NOT TO SCALE

GENERAL NOTES		ITEM#		QTY	PART LIST	DESCRIPTION	SHELL THICKNESS:	0.400"	DRAWN:	EA/ATF		CLIENT: FRP/MOCOAT FIBERGLASS LTD.		
- CSA ANSI/NSF 61 CERTIFIED FRP POTABLE WATER TANK. - RATED FOR 7' OF BURIAL DEPTH AND NO TRAFFIC LOADING. - ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN.. - DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED. - 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS.		1	1		30"CAP LID W/ 8"D POLY SCREW OUT INSERT, VENTED	FRP LID	HEMI HEAD THICKNESS:	0.940"	CHECKED:	MPS		TITLE: BX7000W FRP POTABLE WATER TANK		
		2	1		30" MANWAY COLLAR	30"Ø FRP MANWAY	RIBS THICKNESS:	0.25"	DATE:	AUG. 15,2025		 FRPMOCOAT FIBERGLASS LTD.		
		3	1		2" FRP NPT CONNECTION	OUTLET	RIB SPACING:	16 1/2" CL TO CL	DESIGNED:	FRP		SIZE: B	DRAWING NUMBER: BX7000W	REVISION: 0
		4	2		CARBON STEEL LIFT LUG	LIFT LUG	WEIGHT:	1,610 KG (3,550 LBS)	APPROVED:	MPS		SCALE: B	WEIGHT: 1,610 KG (3,550 LBS)	SHEET: 1/1
		5					LENGTH:	4,940MM (16'-2 1/2")	MFG.:	DS			BURIAL DEPTH:	RATED 7'- 0"
		6					WORKING CAPACITY:	N/A	QA:	GA				
		7					OVERALL CAPACITY:	32,240 L (7,090 IG/8,517 USG)	SALES:	TA				