
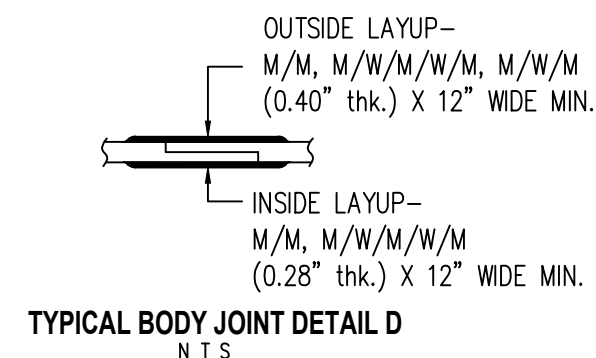
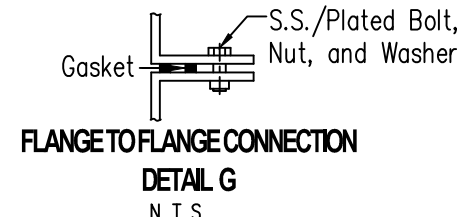
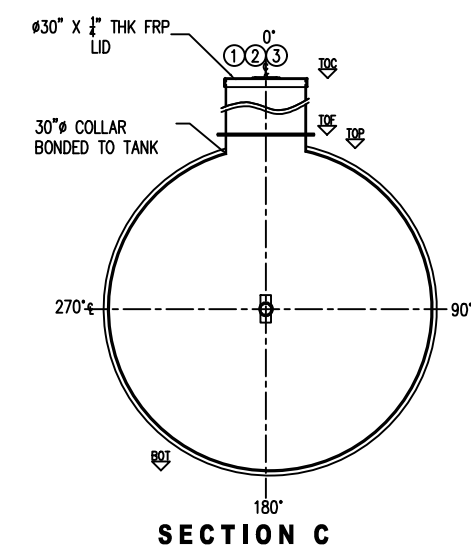


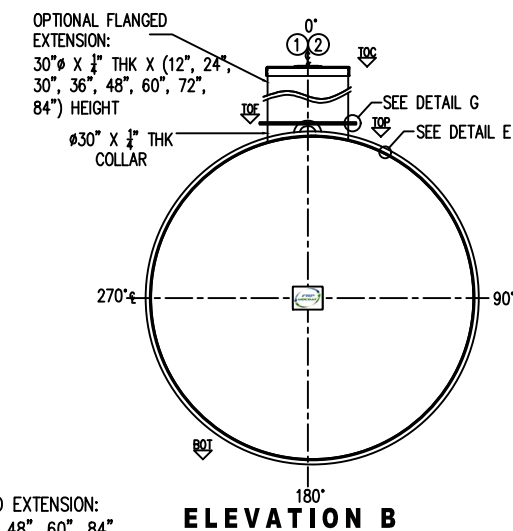

GENERAL NOTES CSA ANSI/NSF 61 CERTIFIED FRP POTABLE WATER TANK. - RATED FOR 10' OF BURIAL DEPTH AND NO TRAFFIC LOADING. - ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN.. - DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED. - 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS.	ITEM#	QTY	PART LIST	DESCRIPTION	SHELL THICKNESS:	0.500"	DRAWN:	EA/ATF		CLIENT:	FRP/MOCOAT FIBERGLASS LTD.		
	1	1	30"CAP LID W/ 8"D POLY SCREW OUT INSERT, VENTED	FPR LID	HEMI HEAD THICKNESS:	1.030"	CHECKED:	MPS		TITLE:	BX30000W- DB FRP POTABLE WATER TANK		
	2	1	30" MANWAY COLLAR	30"Ø FRP MANWAY	RIBS THICKNESS:	0.300"+2 WR (0.066")=.366"	DATE:	AUG. 19,2025			FRPMOCOAT		
	3	1	2" FRP NPT CONNECTION	OUTLET	RIB SPACING:	16 1/2" CL TO CL	DESIGNED:	FRP		FIBERGLASS LTD.			
	4	4	CARBON STEEL LIFT LUG	LIFT LUG	WEIGHT:	5,740 KG (12,627 LBS)	APPROVED:	MPS		SIZE:	DRAWING NUMBER:	REVISION:	
	5				LENGTH:	19,317MM (63'-4 1/2")	MFG.:	DS		B	BX30000W- DB	0	
	6				WORKING CAPACITY:	N/A	QA:	GA		SCALE:	WEIGHT:	5,740 KG (12,627 LBS)	SHEET:
	7				OVERALL CAPACITY:	137,300 L (30,202IG/36,424 USG)	SALES:	TA		.	BURIAL DEPTH:	RATED 10'- 0"	1/1