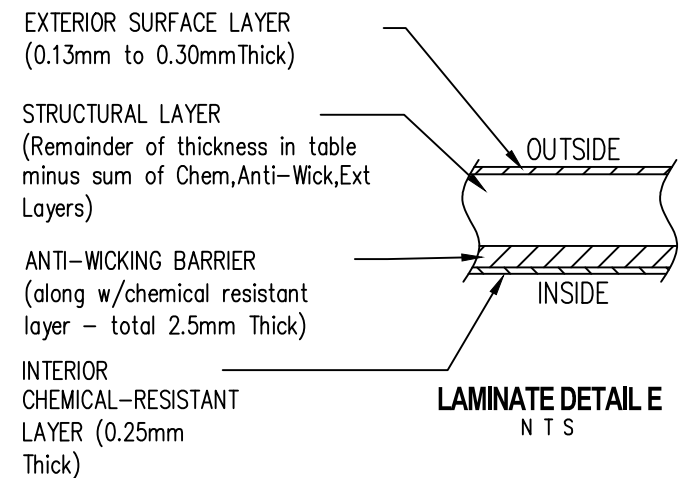
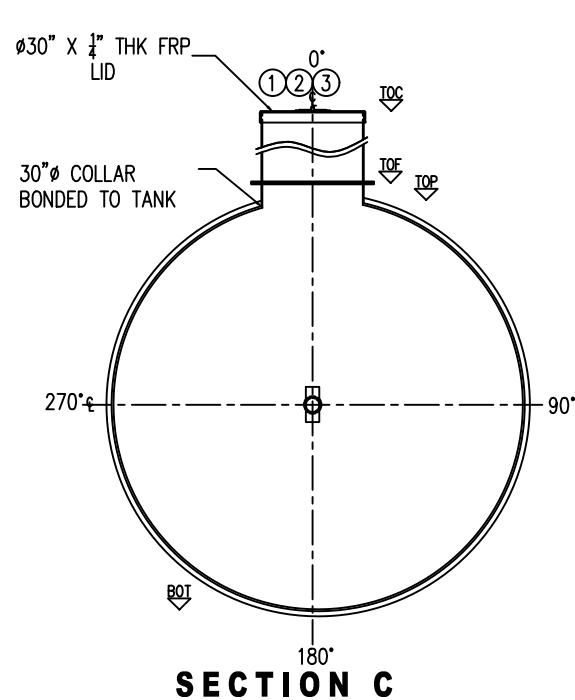
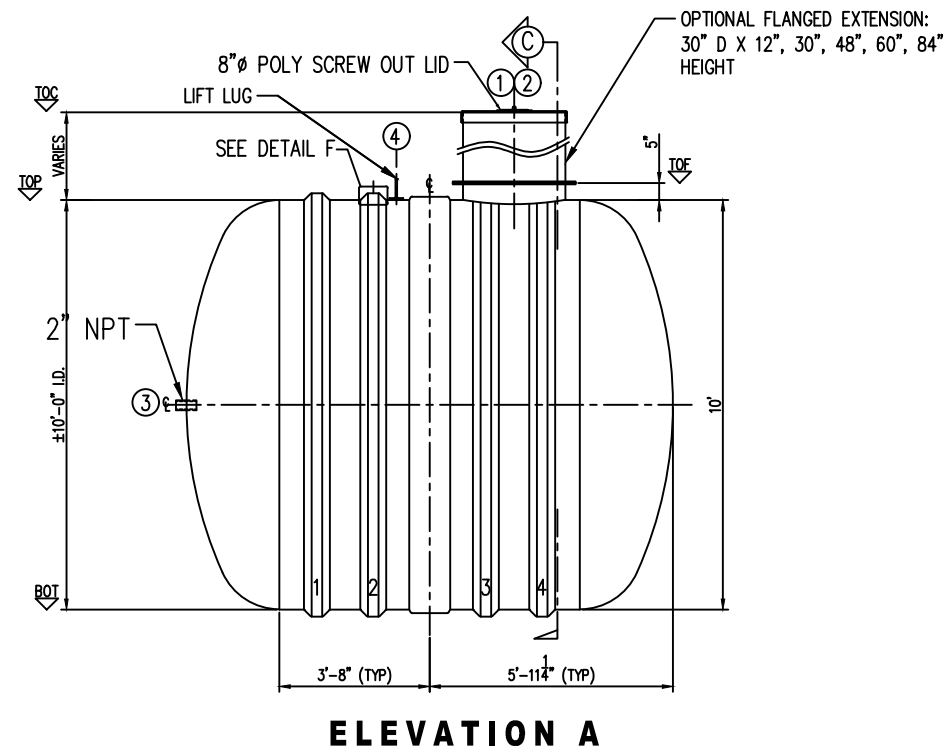


LEGEND:

TOC – TOP OF CAP LID
TOF – TOP OF FLANGE
TOP – TOP CYLINDER
BOT – BOTTOM CYLINDER
I/S – INSIDE
LL – LIQUID LEVEL
O.A.H. – OVERALL HEIGHT
O.A.L. – OVERALL LENGTH
I/S – INSIDE
O/S – OUTSIDE
Ø – DIAMETER
° – DEGREE/S
TYP – TYPICAL
C – CENTER LINE
NTS – NOT TO SCALE

GENERAL NOTES		ITEM#		QTY	PART LIST	DESCRIPTION	SHELL THICKNESS: 0.425"		DRAWN: EA/ATF		CLIENT: FRP/MOCOAT FIBERGLASS LTD.			
- CSA ANSI/NSF 61 CERTIFIED FRP POTABLE WATER TANK. - RATED FOR 10' OF BURIAL DEPTH AND NO TRAFFIC LOADING. - ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN.. - DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED. - 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS.		1	1	30"CAP LID W/ 8"D POLY SCREW OUT INSERT, VENTED	FPR LID	DISH HEAD THICKNESS: 1.030"		CHECKED: MPS	TITLE: BX5000W- DB FRP POTABLE WATER TANK					
		2	1	30" MANWAY COLLAR	30"Ø FRP MANWAY	RIBS THICKNESS: 0.300"		DATE: AUG. 15,2025	 FRPMOCOAT FIBERGLASS LTD.					
		3	1	2" FRP NPT CONNECTION	OUTLET	RIB SPACING: 16 1/2" CL TO CL		DESIGNED: FRP						
		4	1	CARBON STEEL LIFT LUG	LIFT LUG	WEIGHT: 1,429 KG (3,150 LBS)		APPROVED: MPS	SIZE: B		DRAWING NUMBER: BX5000W- DB		REVISION: 0	
		5				LENGTH: 3,619MM (11'-10 1/2")		MFG.: DS	SCALE: .		WEIGHT: 1,429 KG (3,150 LBS)		SHEET: 1/1	
		6				WORKING CAPACITY: N/A		QA: GA	BURIAL DEPTH:		RATED 10'- 0"			
7				OVERALL CAPACITY: 22,980 L (5,055 IG/6,066 USG)		SALES: TA								