

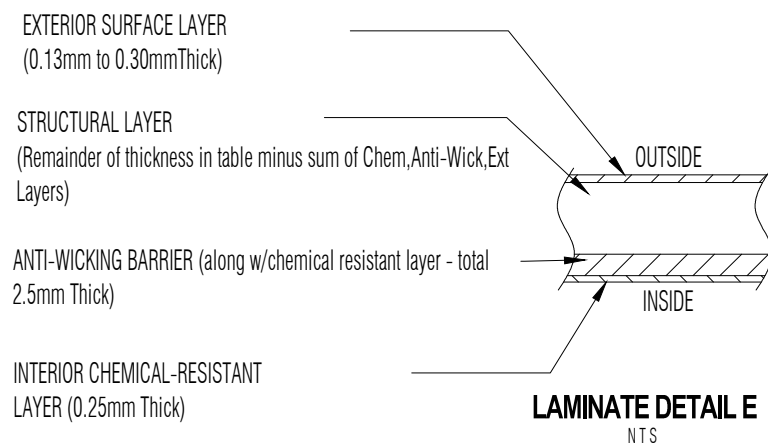
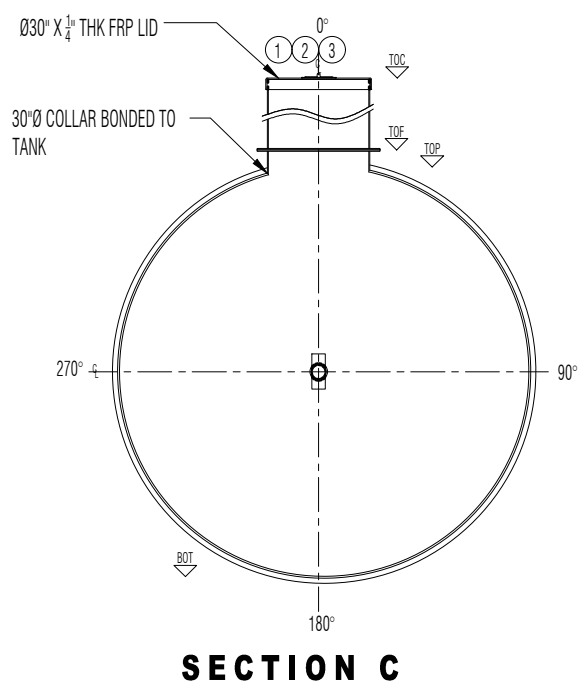
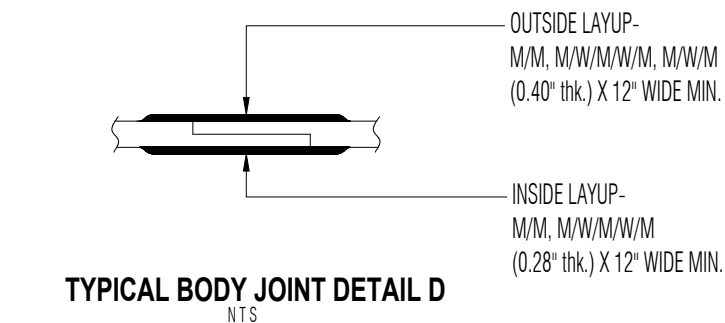


LEGEND:
 TOC - TOP OF CAP LID
 TOP - TOP OF FLANGE
 TOP - TOP CYLINDER
 BOT - BOTTOM CYLINDER
 I/S - INSIDE
 LL - LIQUID LEVEL
 O.A.H.-OVERALL HEIGHT
 O.A.L.-OVERALL LENGTH
 I/S - INSIDE
 O/S - OUTSIDE
 Ø - DIAMETER
 ° - DEGREE/S
 TYP - TYPICAL
 C - CENTER LINE
 NTS - NOT TO SCALE

GENERAL NOTES		ITEM# QTY PART LIST DESCRIPTION		SHELL THICKNESS: 0.400" DRAWN: EA/ATF			CLIENT: FRP/MOCOAT FIBERGLASS LTD.		
- CSA ANSI / NSF 61 CERTIFIED FRP POTABLE WATER TANK. - RATED FOR 7' OF BURIAL DEPTH AND NO TRAFFIC LOADING. - ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN. - DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED. - 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS.		1 1 30"CAP LID W/ 8"D POLY SCREW OUT INSERT, VENTED FRP LID		HEMI HEAD THICKNESS: 0.940" CHECKED: MPS			TITLE: BX10000W FRP POTABLE WATER TANK		
		2 1 30" MANWAY COLLAR 30"Ø FRP MANWAY		RIBS THICKNESS: 0.25" DATE: AUG. 15,2026			 FRPMOCOAT FIBERGLASS LTD.		
		3 1 2" FRP NPT CONNECTION OUTLET		RIB SPACING: 16 1/2" CL TO CL DESIGNED: FRP					
		4 2 CARBON STEEL LIFT LUG LIFT LUG		WEIGHT: 1,837 KG (4,050 LBS) APPROVED: MPS			SIZE: B	DRAWING NUMBER: BX10000W	REVISION: 0
		5		LENGTH: 6,718MM (22'-0 1/2") MFG.: TS			SCALE: .	WEIGHT: 1,996 KG (4,400 LBS)	SHEET: 1/1
		6		WORKING CAPACITY: N/A QA: BR			BURIAL DEPTH: RATED 7'- 0"		
7				OVERALL CAPACITY: 45,470 L (10,002 IG/12,002 USG) SALES: DG					



BX10000W FRP POTABLE WATER TANK

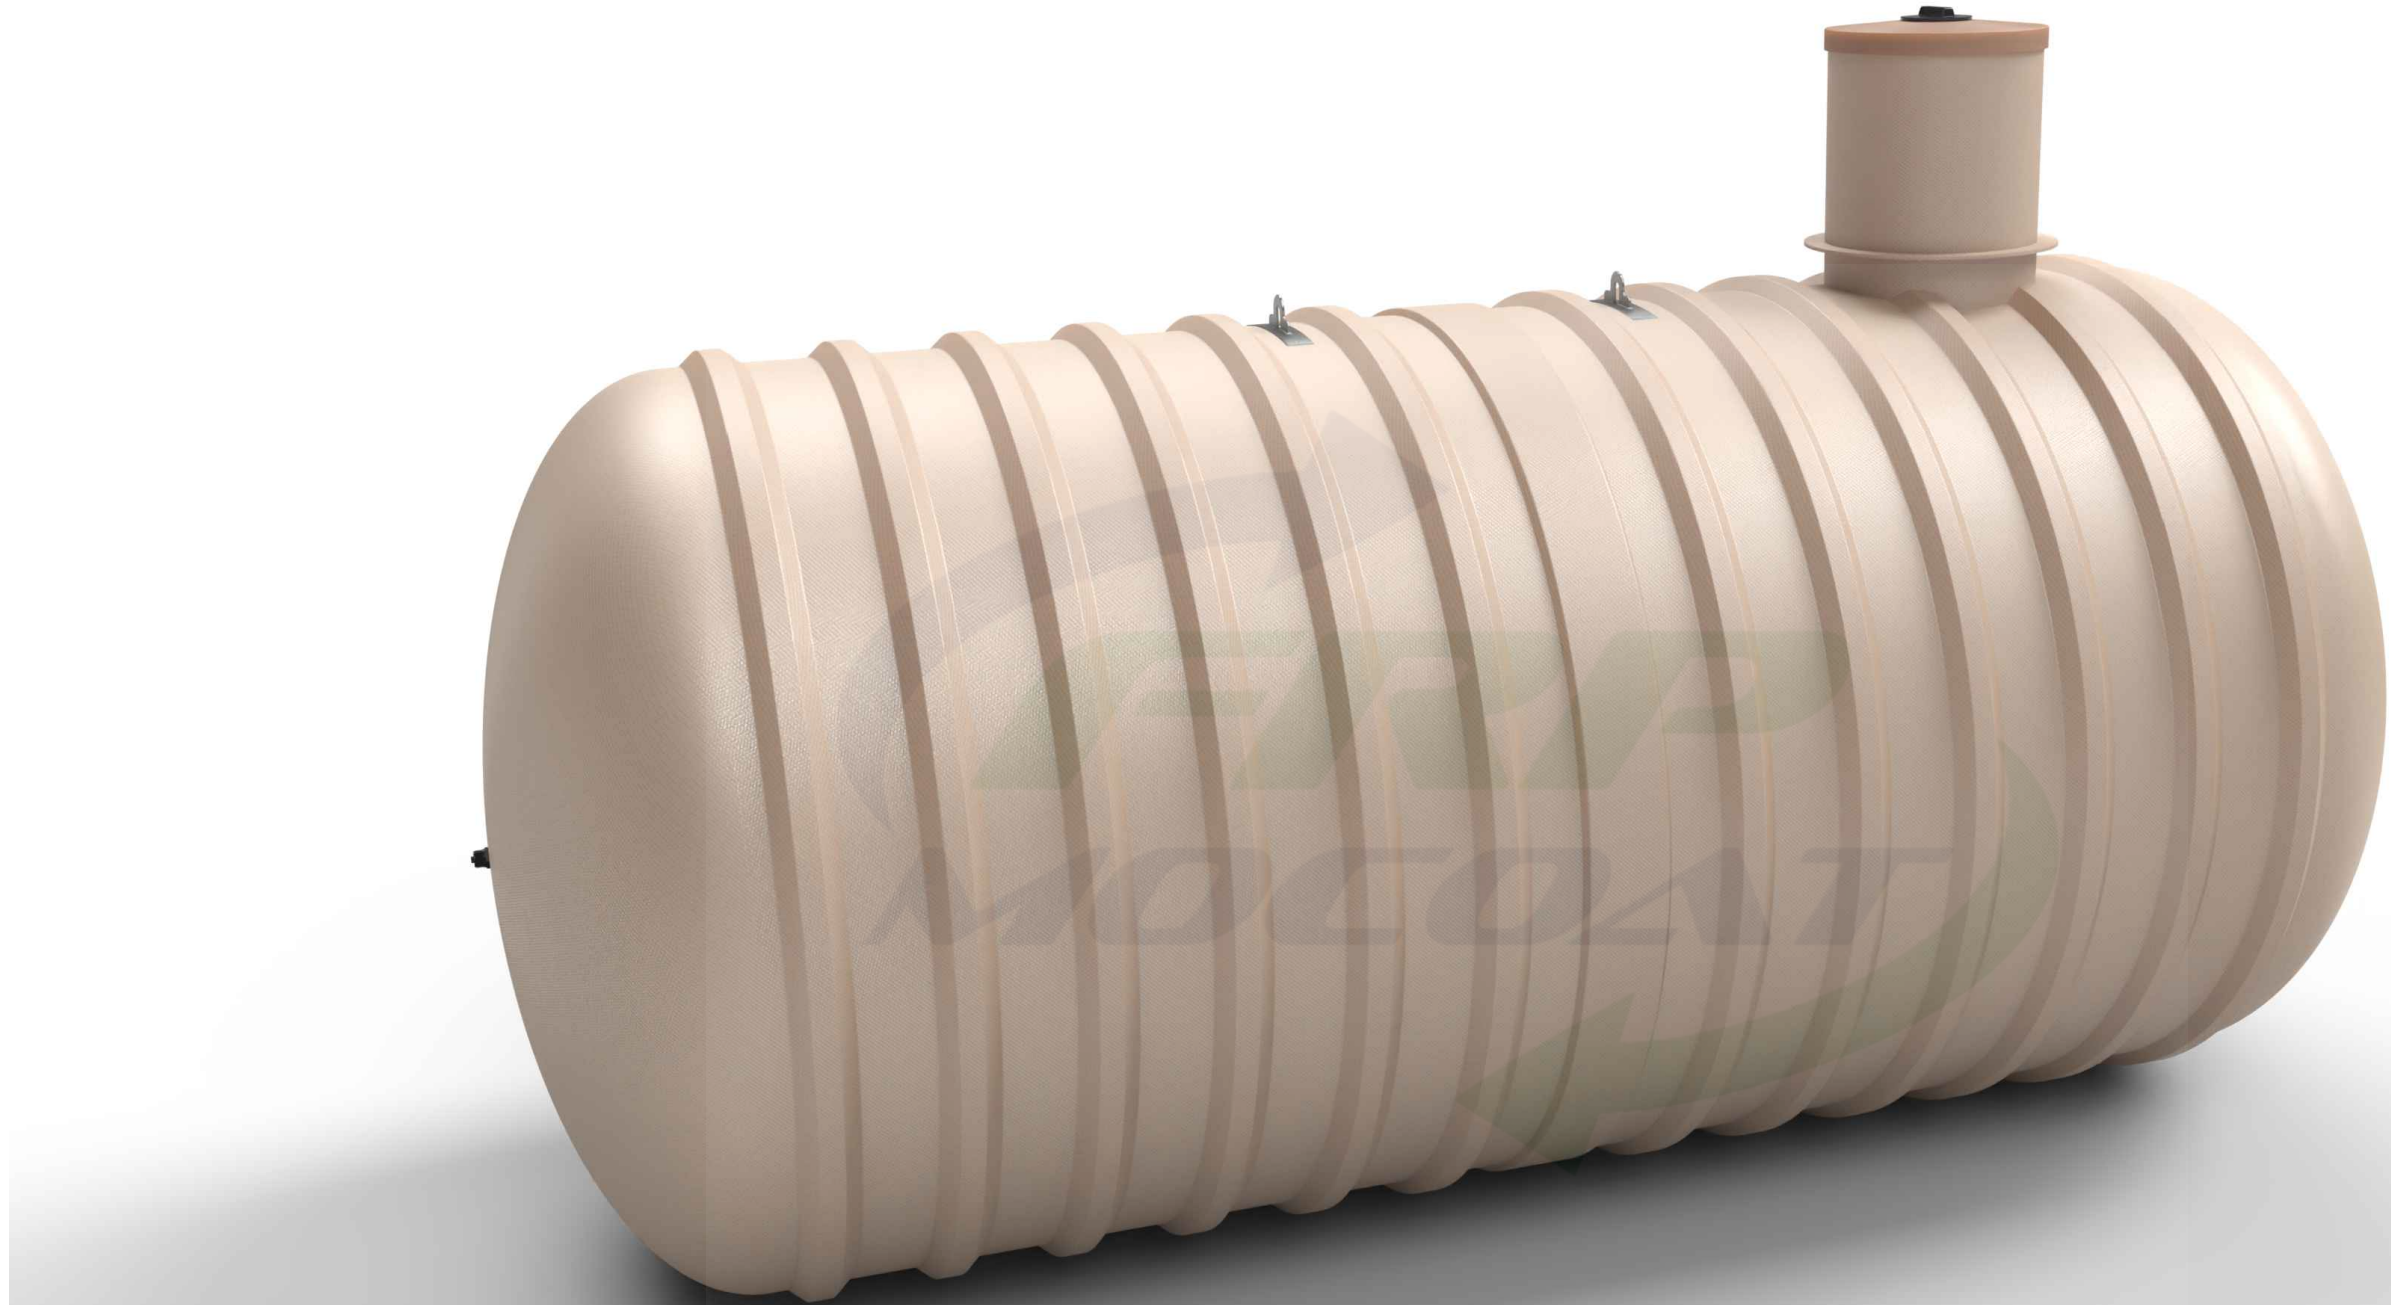