

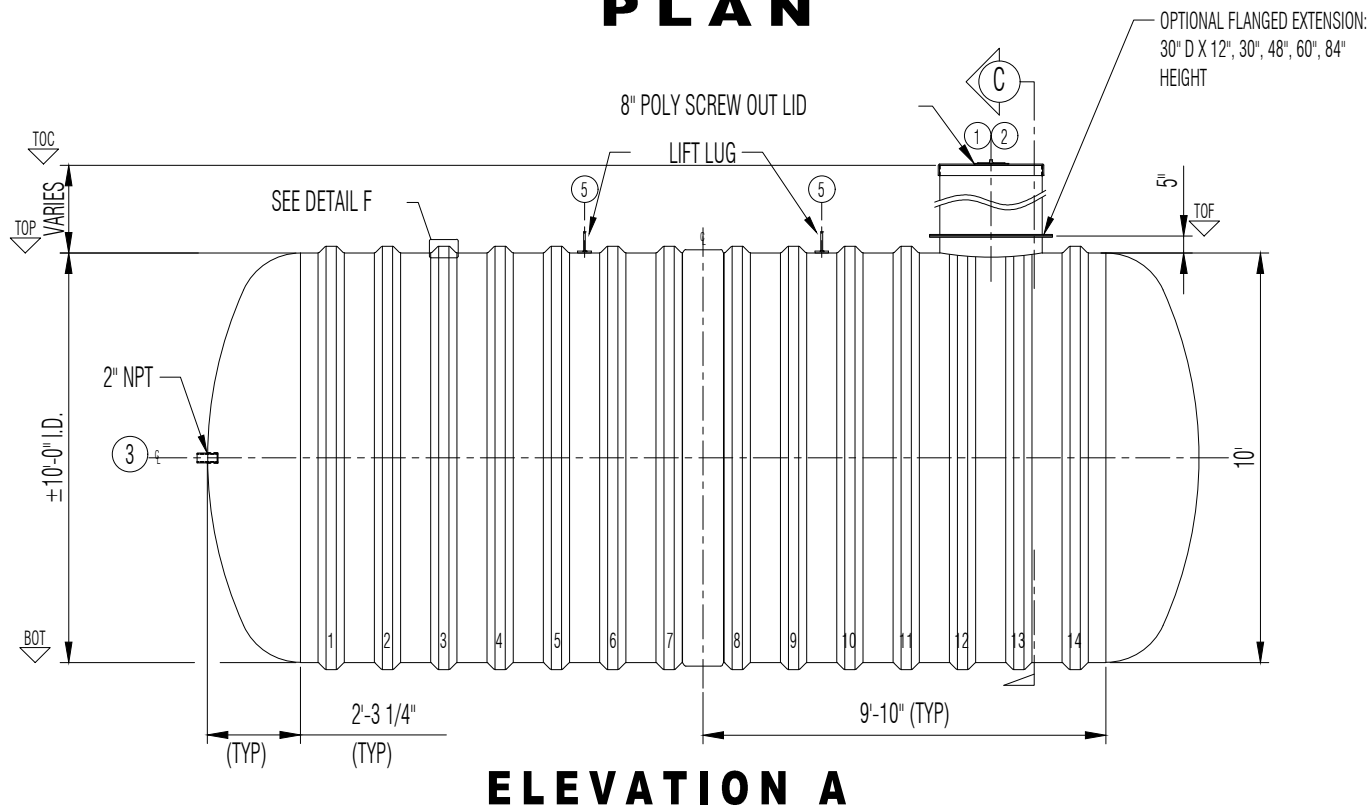
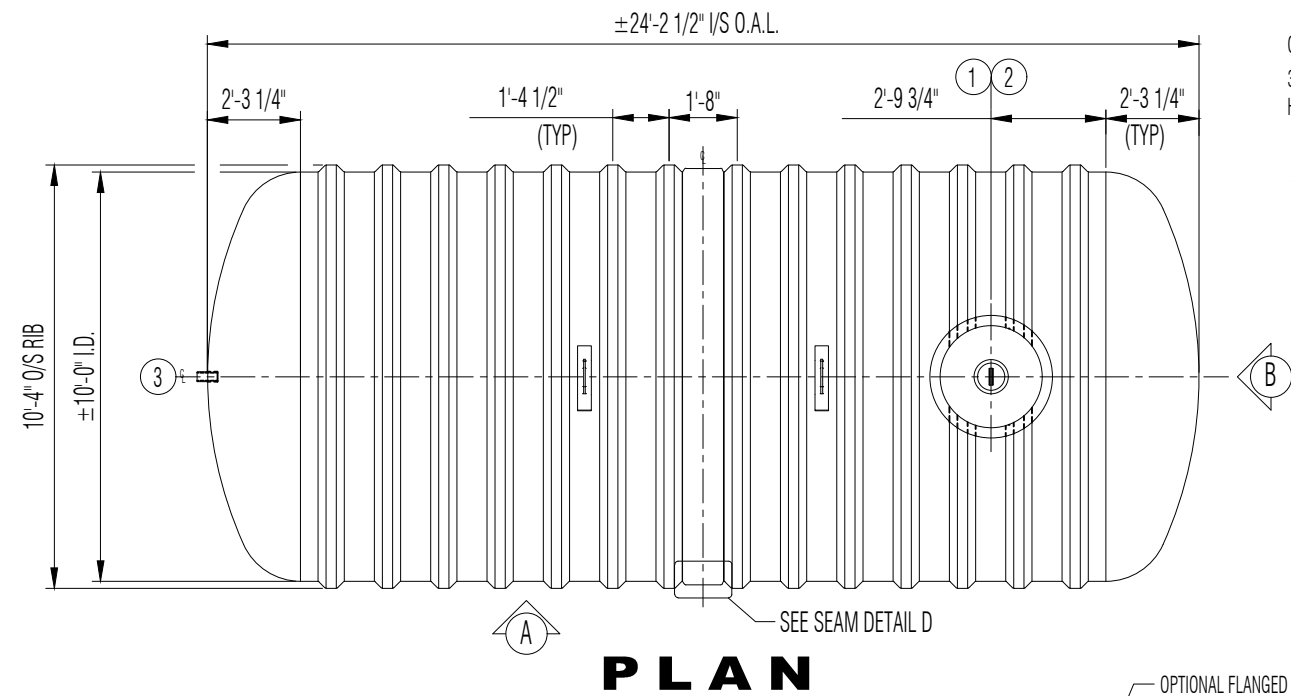
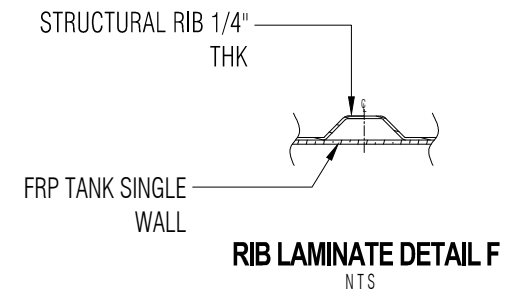
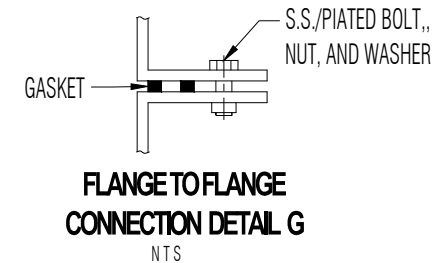
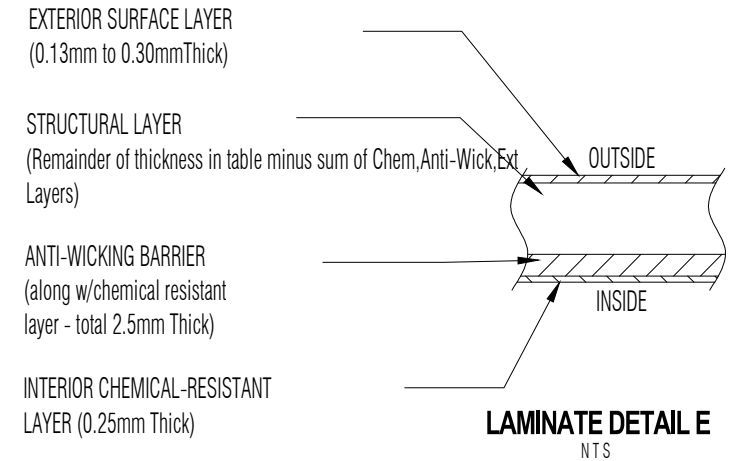
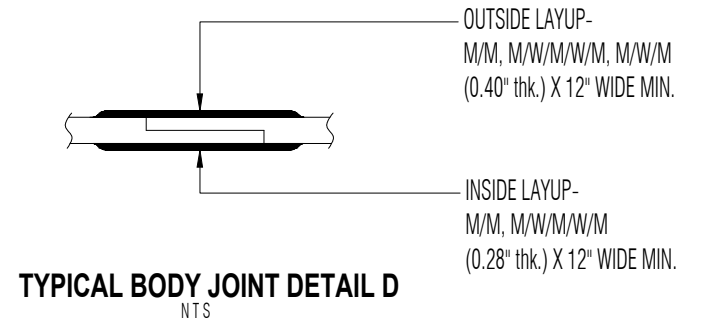


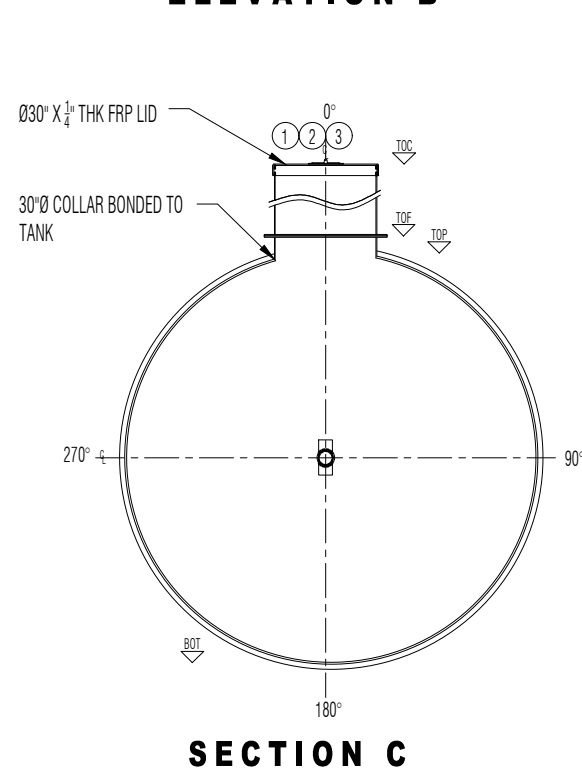

OPTIONAL FLANGED EXTENSION:
30"Ø X 1/4" THK X (12", 24", 30", 36", 48", 60", 72", 84")
HEIGHT

Ø30" X 1/4" THK COLLAR

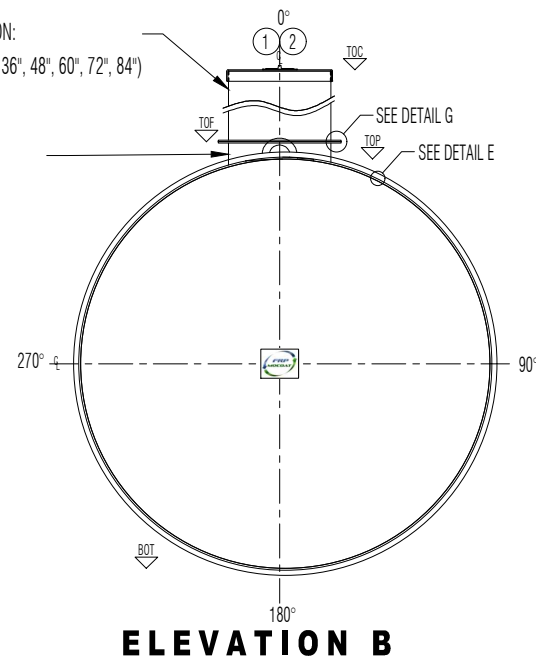

LEGEND:
TOC - TOP OF CAP LID
TOF - TOP OF FLANGE
TOP - TOP CYLINDER
BOT - BOTTOM CYLINDER
I/S - INSIDE
LL - LIQUID LEVEL
O.A.H.-OVERALL HEIGHT
O.A.L.-OVERALL LENGTH
I/S - INSIDE
O/S - OUTSIDE
Ø - DIAMETER
° - DEGREE/S
TYP - TYPICAL
CL - CENTER LINE
NTS - NOT TO SCALE

GENERAL NOTES	
- CSA ANSI / NSF 61 CERTIFIED FRP POTABLE WATER TANK.	
- RATED FOR 7' OF BURIAL DEPTH AND NO TRAFFIC LOADING.	
- ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN.	
- DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED.	
- 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS.	

ITEM#	QTY	PART LIST	DESCRIPTION
1	1	30"CAP LID W/ 8"D POLY SCREW OUT INSERT, VENTED	FRP LID
2	1	30" MANWAY COLLAR	30"Ø FRP MANWAY
3	1	2" FRP NPT CONNECTION	OUTLET
4	2	CARBON STEEL LIFT LUG	LIFT LUG
5			
6			
7			

SHELL THICKNESS:	0.400"	DRAWN:	EA/ATF
HEMI HEAD THICKNESS:	0.940"	CHECKED:	MPS
RIBS THICKNESS:	0.25"	DATE:	AUG. 15, 2026
RIB SPACING:	16 1/2" CL TO CL	DESIGNED:	FRP
WEIGHT:	2,155 KG (4,750 LBS)	APPROVED:	MPS
LENGTH:	7,378MM (24'-2 1/2")	MFG.:	TS
WORKING CAPACITY:	N/A	QA:	BR
OVERALL CAPACITY:	50,220 L (11,046 IG/13,255 USG)	SALES:	DG

CLIENT: FRP/MOCOAT FIBERGLASS LTD.	
TITLE: BX11000W FRP POTABLE WATER TANK	
FRPMOCOAT FIBERGLASS LTD.	
SIZE: B	DRAWING NUMBER: BX11000W
SCALE:	WEIGHT: 2,155 KG (4,750 LBS)
	BURIAL DEPTH: RATED 7'- 0"
REVISION: 0	SHEET: 1/1



BX11000W FRP POTABLE WATER TANK

