




GENERAL NOTES - CSA ANSI / NSF 61 CERTIFIED FRP POTABLE WATER TANK. - RATED FOR 7' OF BURIAL DEPTH AND NO TRAFFIC LOADING. - ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN. - DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED. - 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS.		ITEM#		QTY	PART LIST		DESCRIPTION		SHELL THICKNESS:		0.400"	DRAWN:		EA/ATF	SA	CLIENT: FRP/MOCOAT FIBERGLASS LTD.				
								HEMI HEAD THICKNESS:		0.940"	CHECKED:		MPS	TITLE: BX17500W FRP POTABLE WATER TANK						
								RIBS THICKNESS:		0.25"	DATE:		AUG. 15,2026	FRP MOCOAT		FRPMOCOAT				
								RIB SPACING:		16 1/2" CL TO CL	DESIGNED:		FRP	FIBERGLASS LTD.						
								WEIGHT:		3,039 KG (6,700 LBS)	APPROVED:		MPS	SIZE: B		DRAWING NUMBER: BX17500W		REVISION: 0		
								LENGTH:		11,493MM (37'-8 1/2")	MFG.:		TS	SCALE: .		WEIGHT: 3,039 KG (6,700 LBS)		SHEET: 1/1		
								WORKING CAPACITY:		N/A	QA:		BR	BURIAL DEPTH:		RATED 7'- 0"				
						OVERALL CAPACITY:		80,060 L (17,610IG/21,132 USG)	SALES:		DG									



BX17500W FRP POTABLE WATER TANK

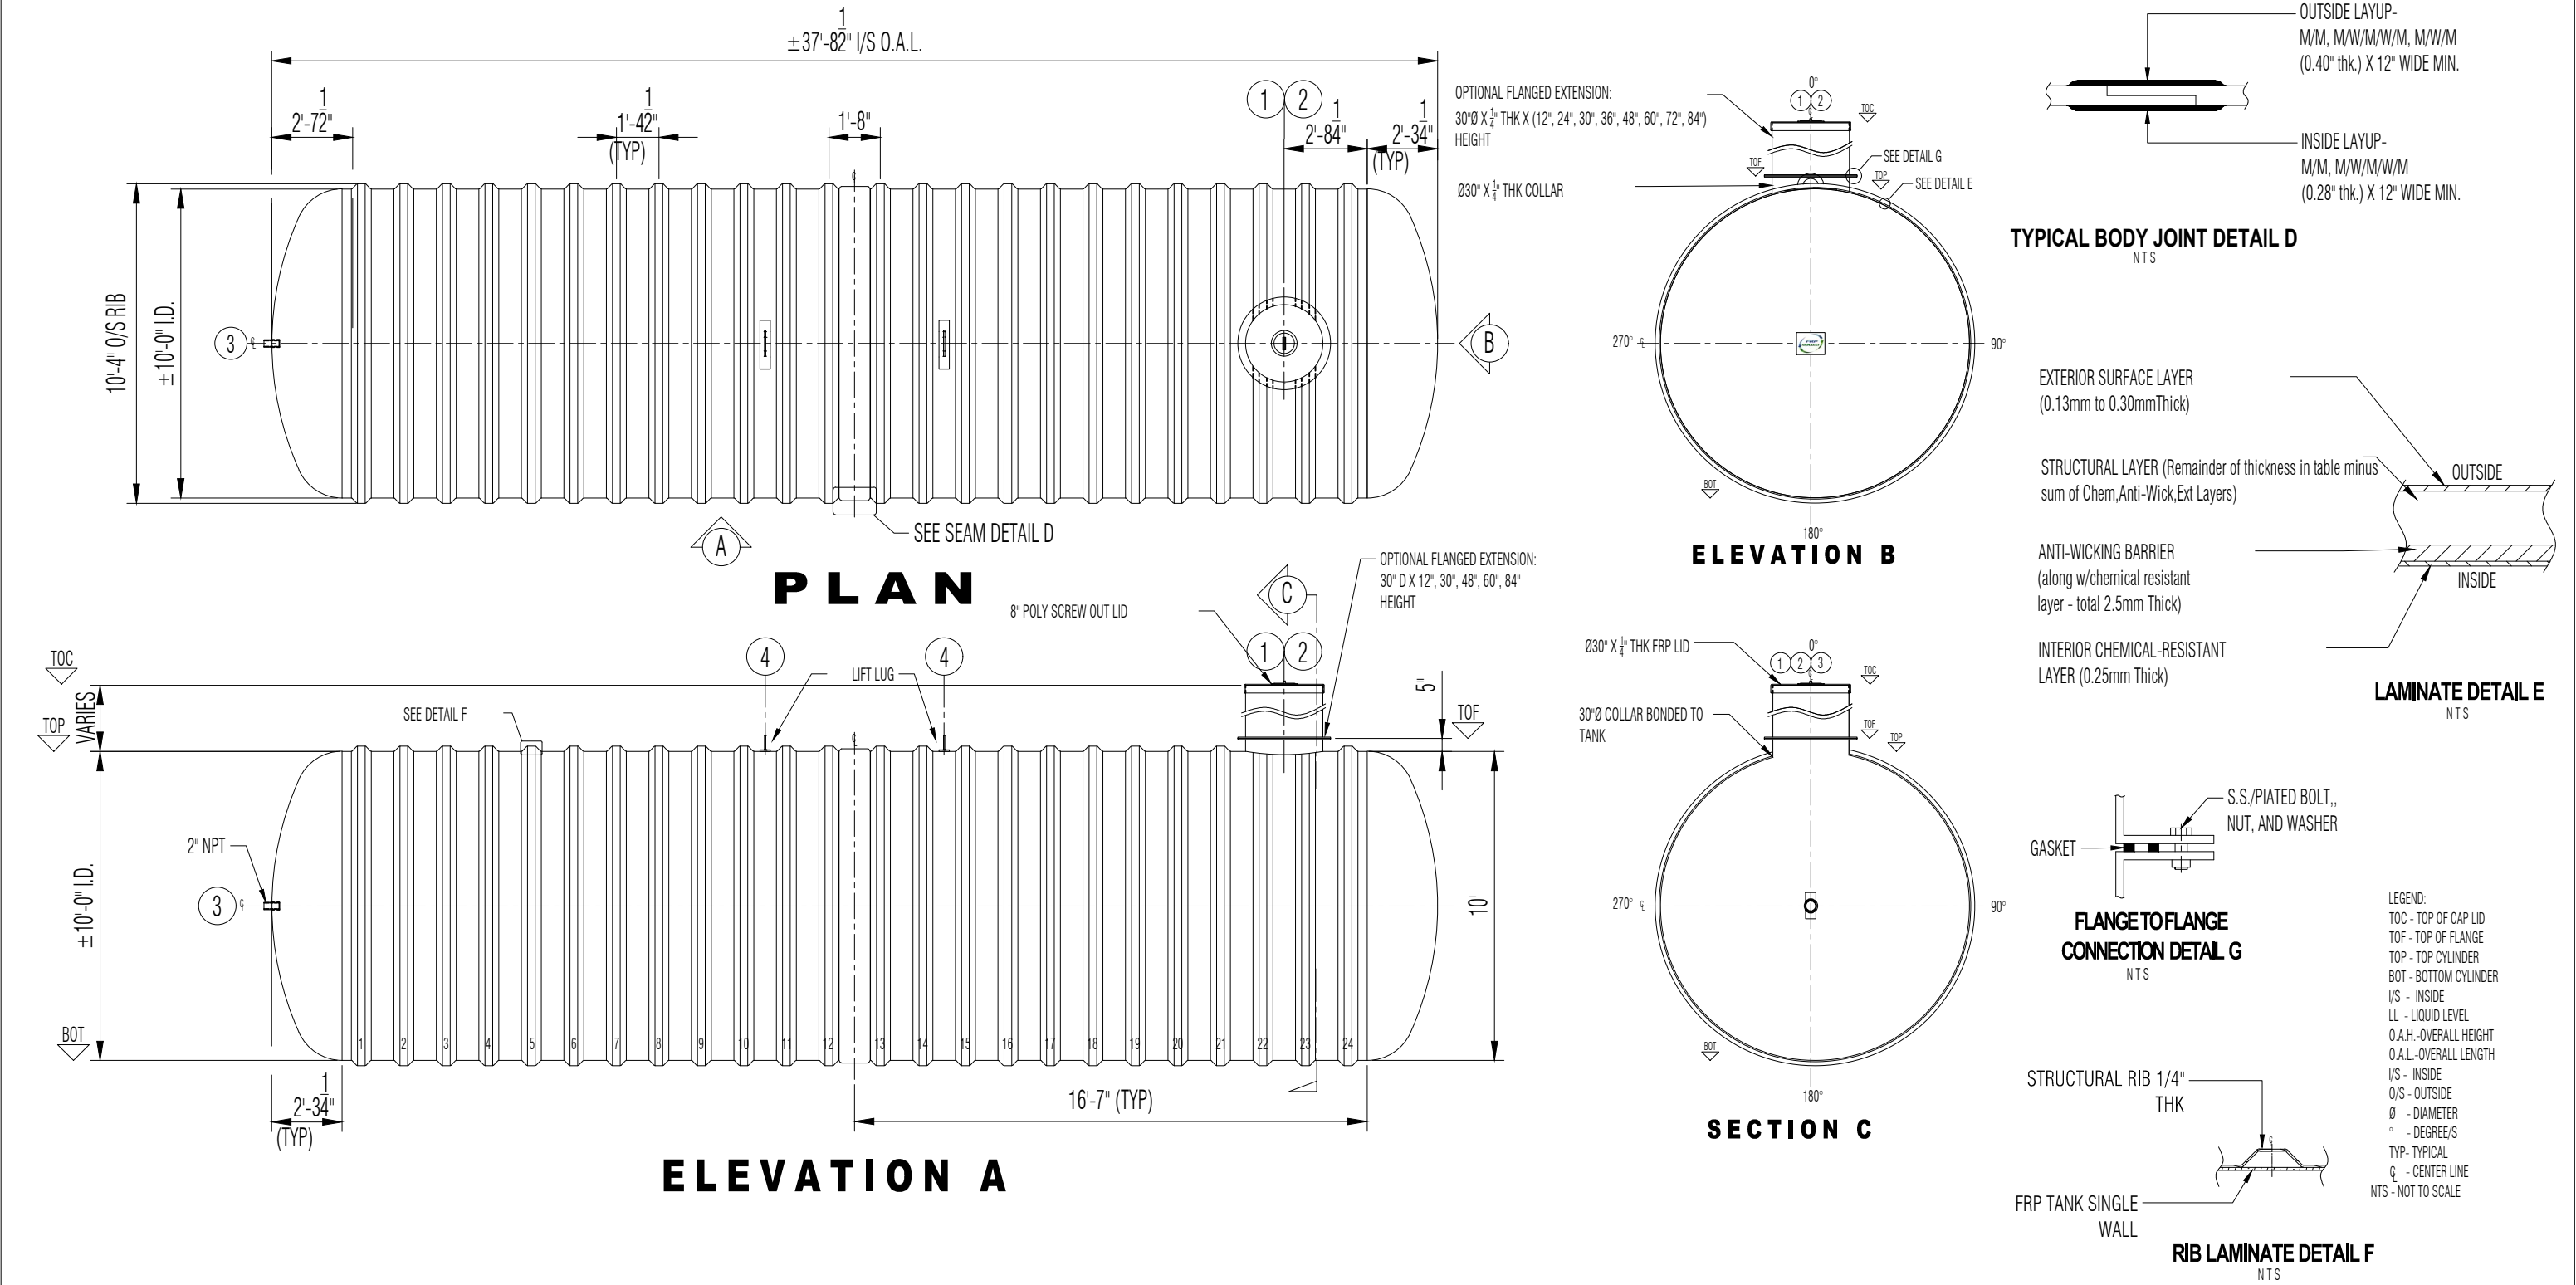