

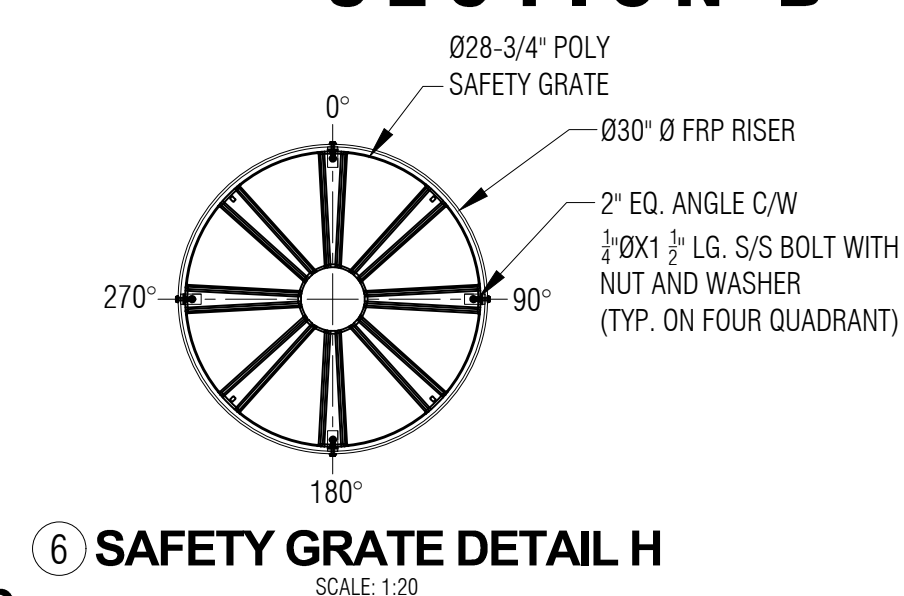
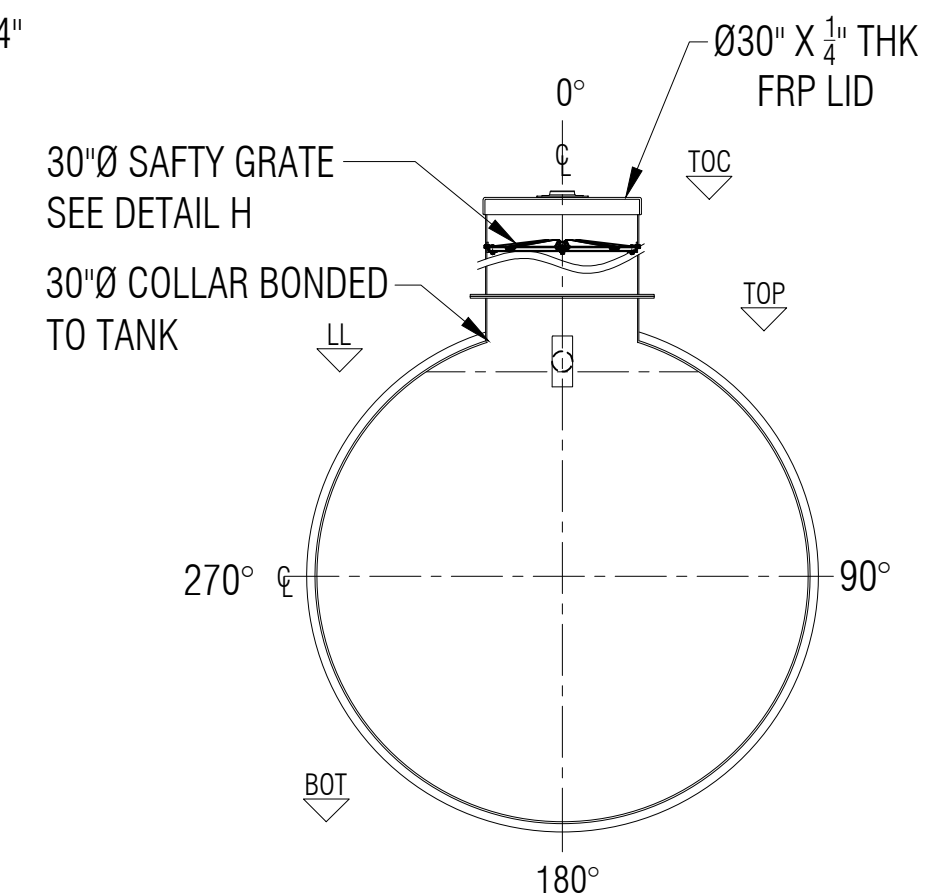
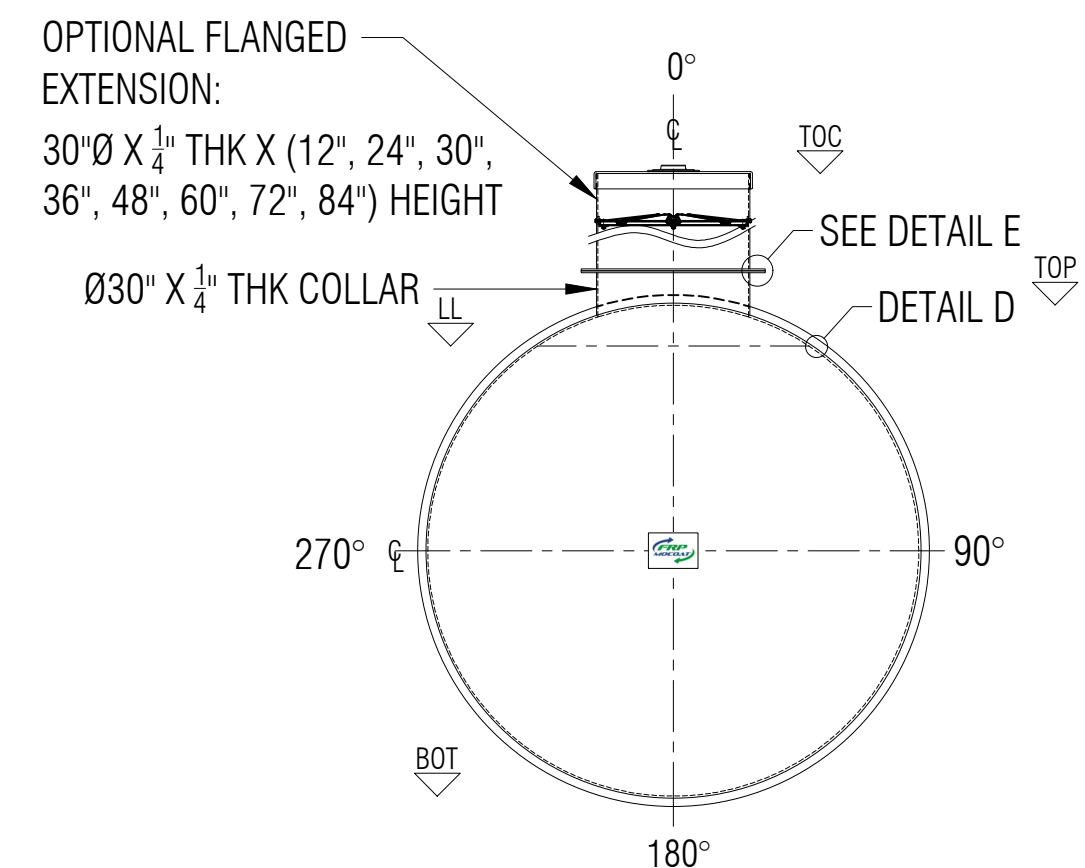
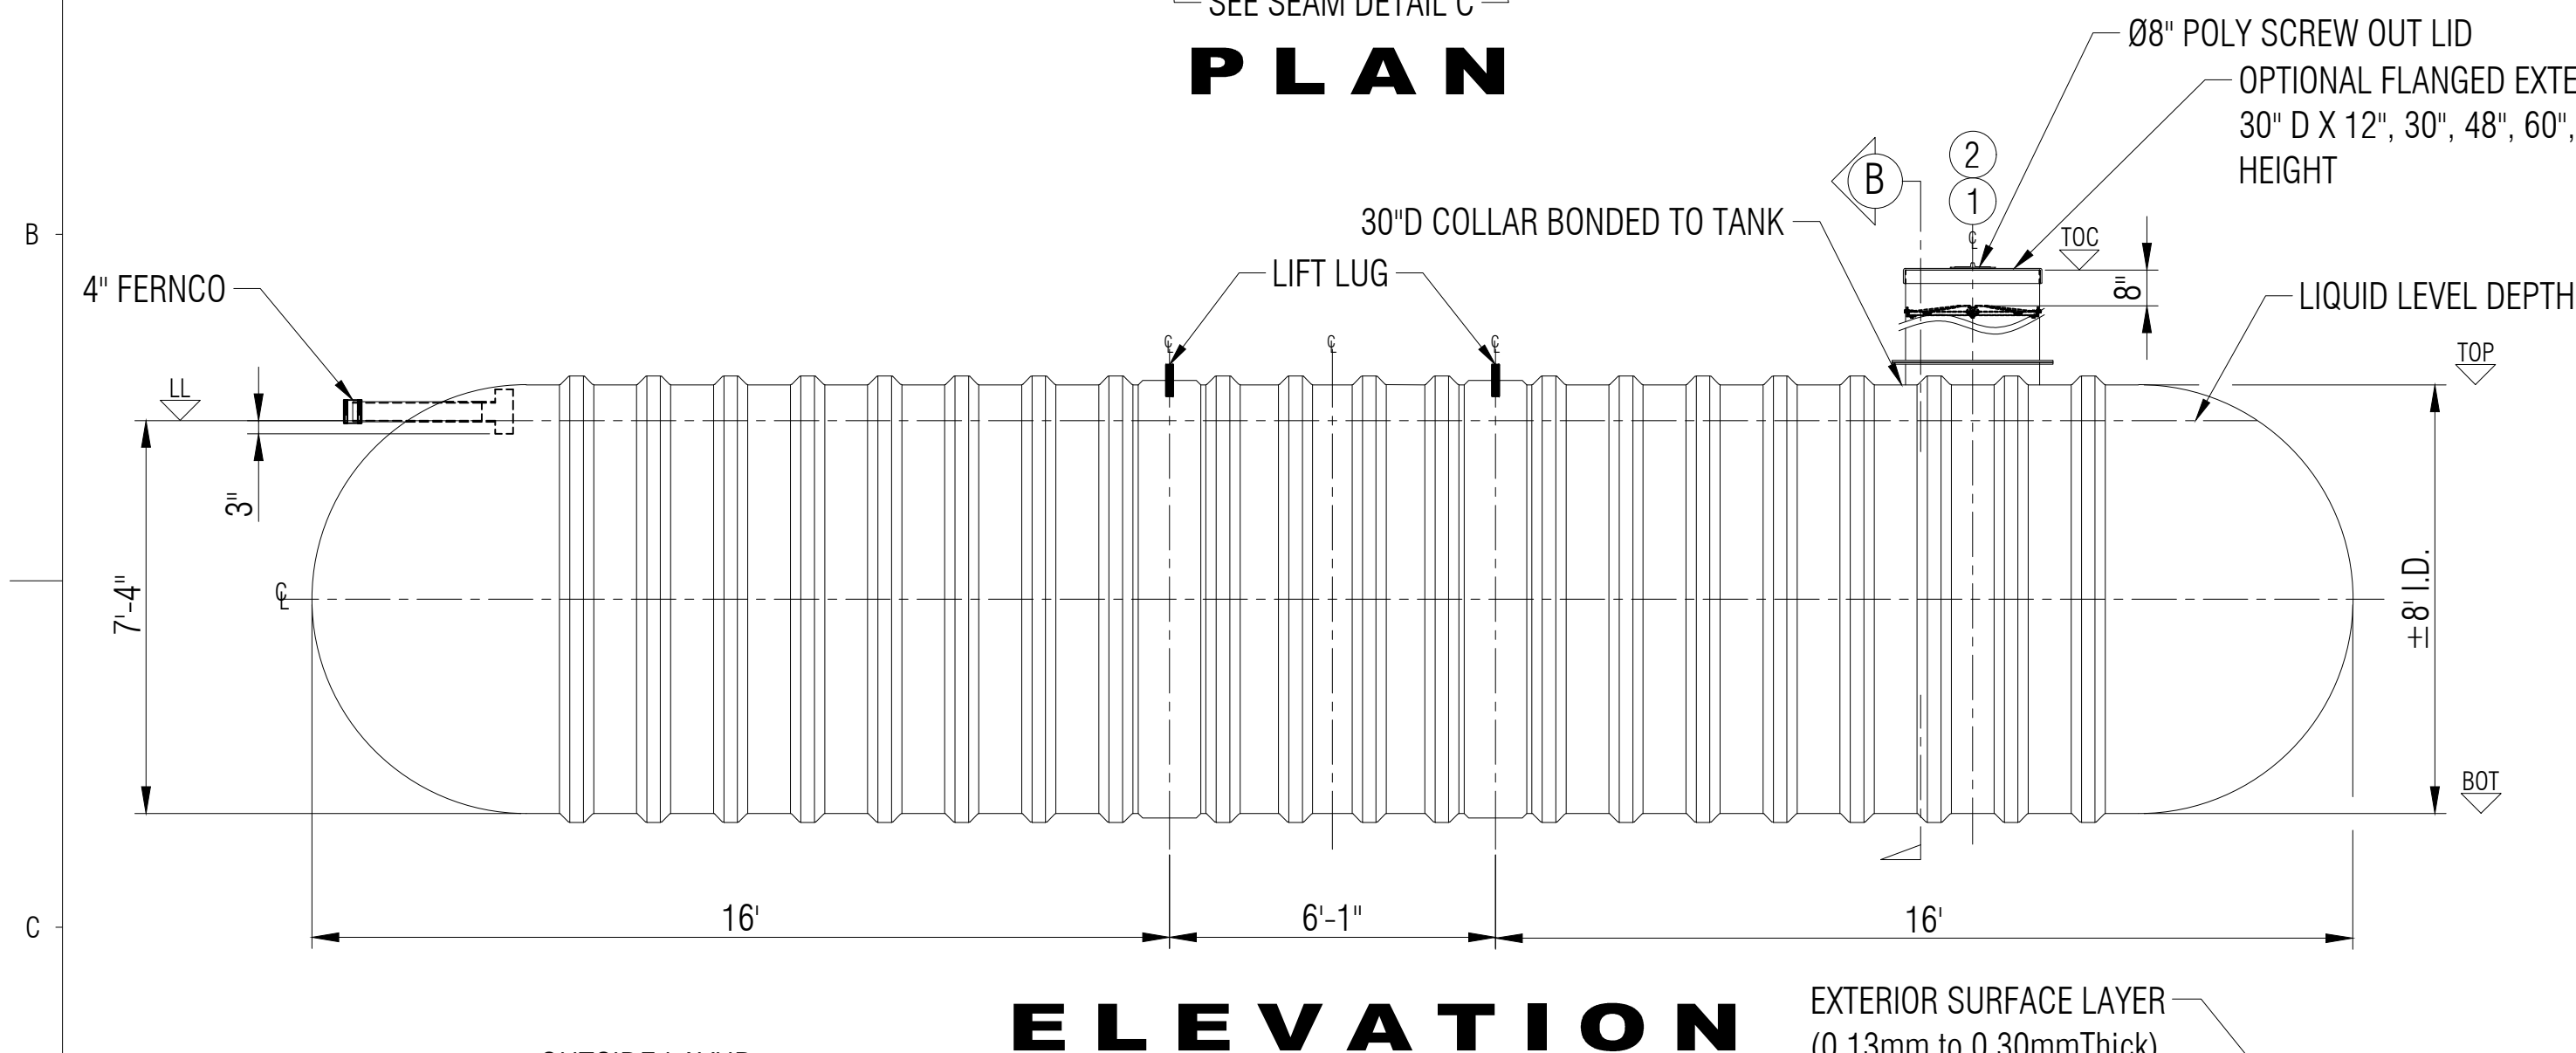
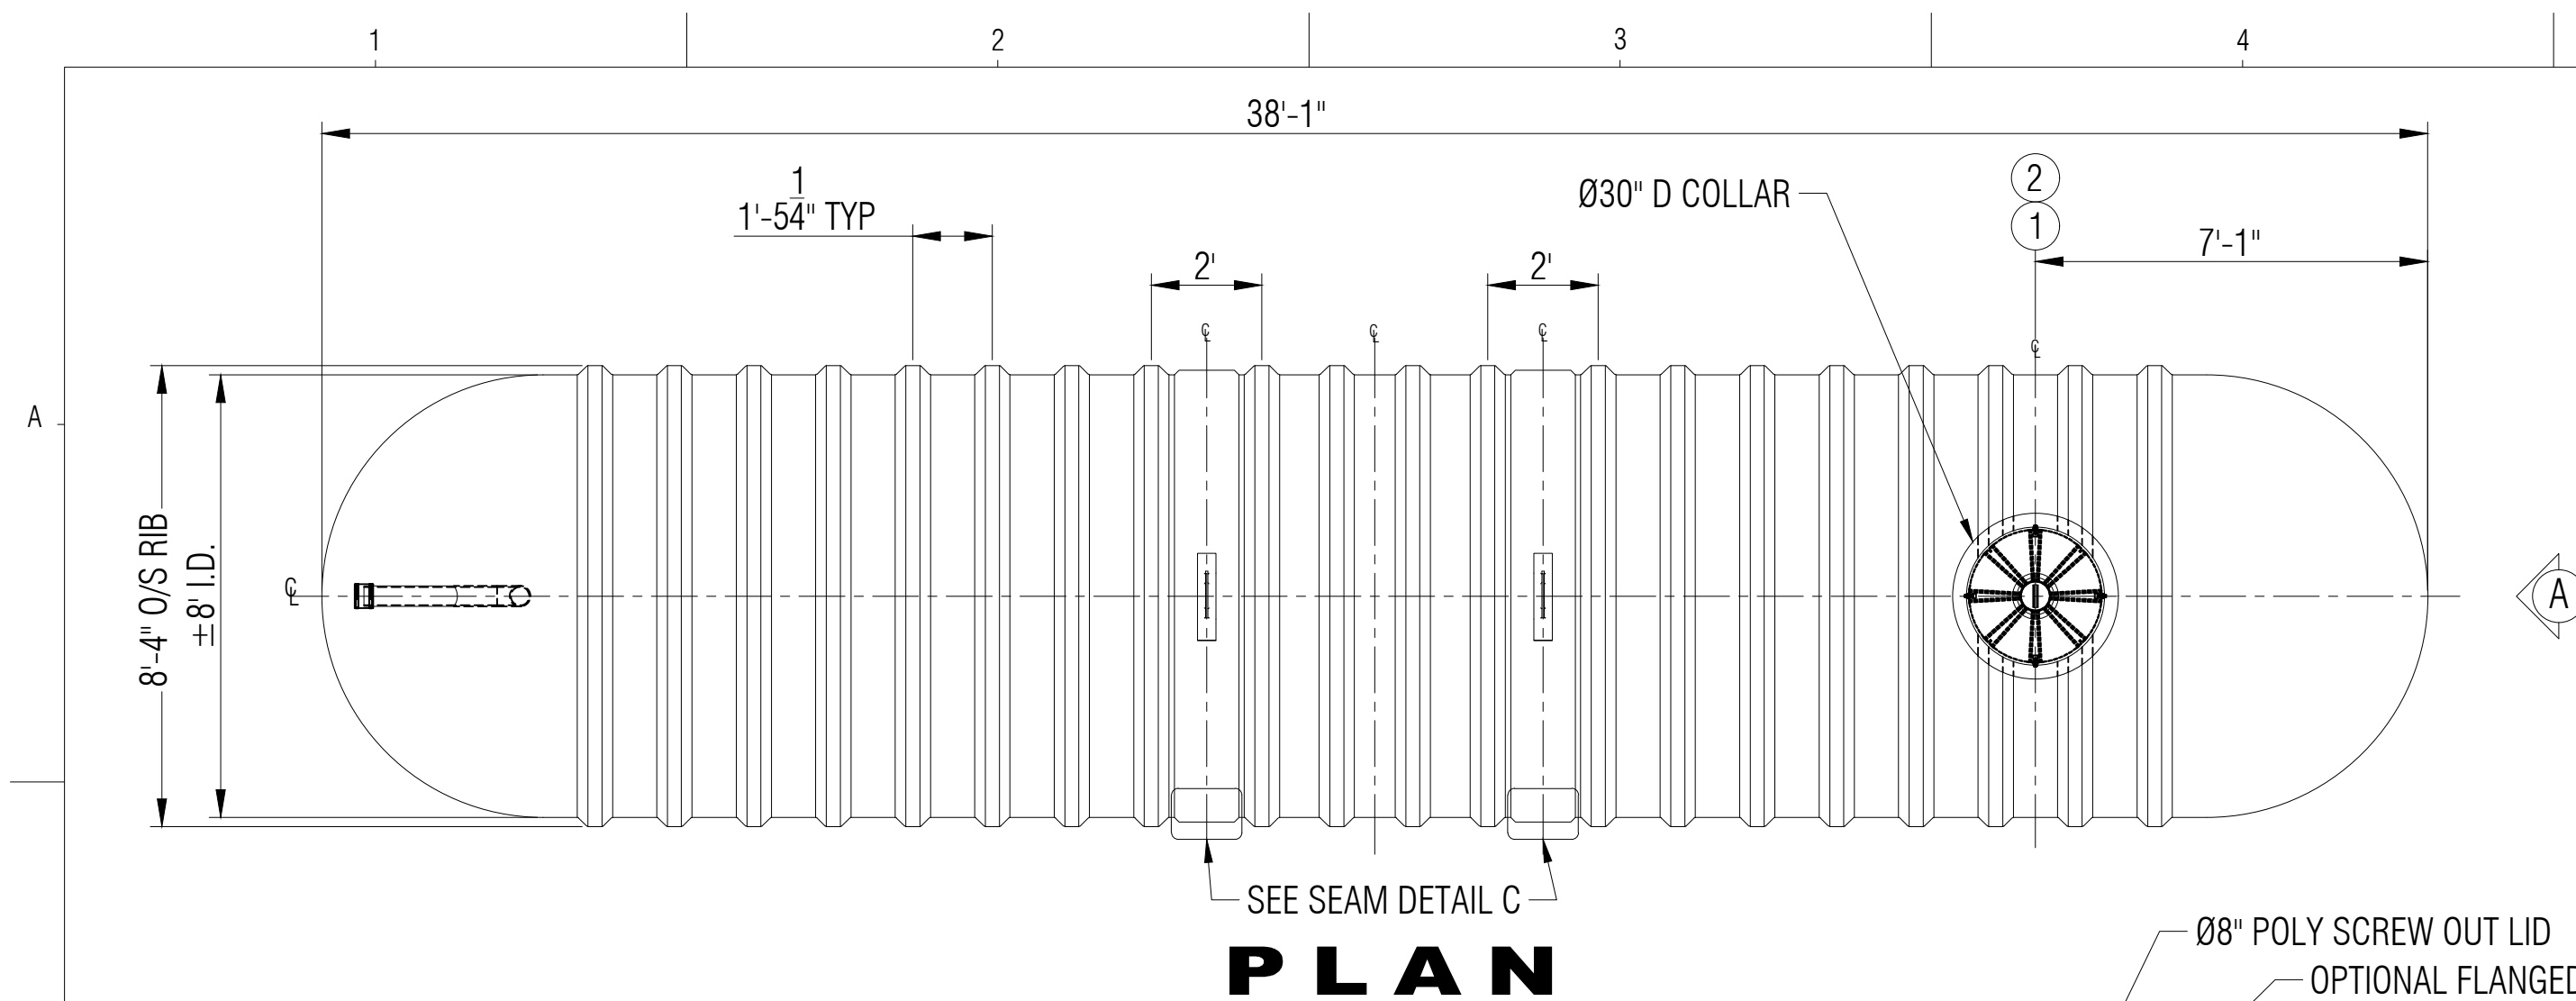
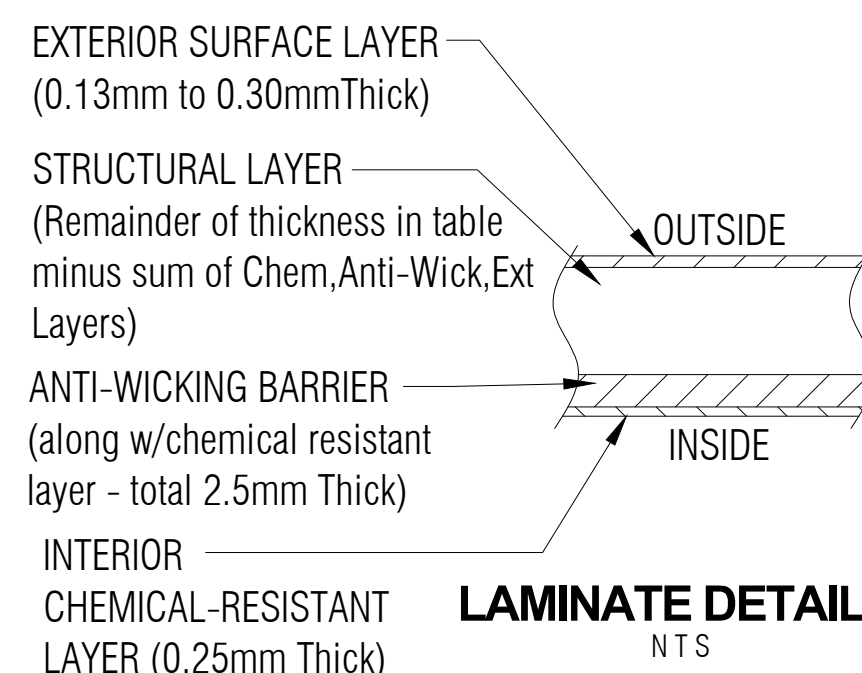


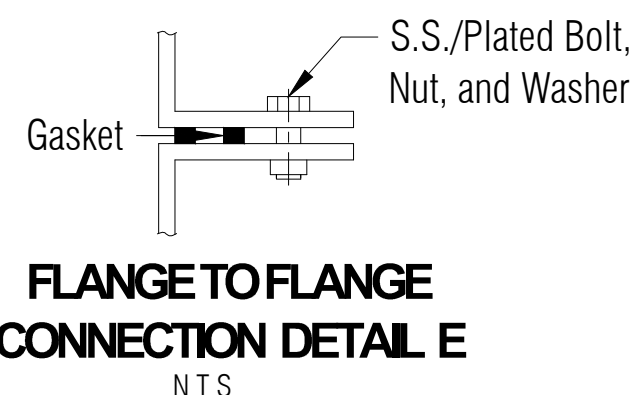

LEGEND:

TOC - TOP OF CAP LID
TOF - TOP OF FLANGE
TOP - TOP CYLINDER
BOT - BOTTOM CYLINDER
I/S - INSIDE
LL - LIQUID LEVEL
O.A.H.-OVERALL HEIGHT
O.A.L.-OVERALL LENGTH
I/S - INSIDE
O/S - OUTSIDE
Ø - DIAMETER
° - DEGREE/S
TYP- TYPICAL
C - CENTER LINE
NTS - NOT TO SCALE

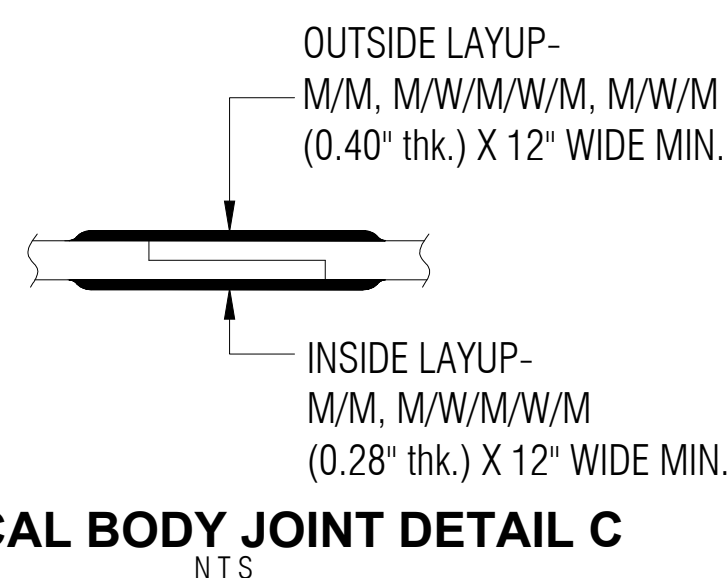


GENERAL NOTES:

- CSA B66 CERTIFIED FRP TANK FOR SEWAGE HOLDING TANK.
- RATED FOR 7' OF BURIAL DEPTH AND NO TRAFFIC LOADING.
- ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN.
- SAFETY GRATE CAN WITHSTAND 91 KG. OF DEAD LOAD.
- DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED.
- 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS.



FRP/MOCOAT												
ITEM#	QTY	PART LIST	DESCRIPTION	SHELL THICKNESS:	0.500"	DRAWN:	CCL/ATF	CLIENT:	FRP/MOCOAT			
1	1	30" CAP LID W/ 8"D POLY SCREW OUT INSERT		HEMI HEAD THICKNESS:	0.650"	CHECKED:	ATF	TITLE:	B11000S FIBERGLASS HOLDING TANK			
2	1	30"Ø MANWAY COLLAR	30"Ø FRP COLLAR	RIBS THICKNESS:	0.25"	DATE:	DEC 10, 2024		FRP MOCOAT FIBERGLASS LTD.			
3	1	4" FERNCO	FLEXIBLE CONNECTOR	RIB SPACING:	17-1/4" (CL to CL)	DESIGNED:	FRP					
4	1	4"Ø PVC PIPE & TEEWYE	INLET	LENGTH:	11,620MM (38'-1")	APPROVED:	MPS					
5	2	MILD STEEL	LIFT LUGS	WORKING CAPACITY:	48,602L (10,691 IG/12,829USG)	MFG:		SIZE	DRAWING NUMBER:			REVISION
								C	B11000S			0
6	1	POLYETHYLENE SAFETY GRATE C/W HARDWARE	SAFETY GRATE	OVERALL CAPACITY:	50,384L (11,084 IG/13,300 USG)	PM:		SCALE		WEIGHT:	2,472 KG (5,450 LBS)	SHEET
7						SALES:		1:40		BURIAL DEPTH:	RATED 7'-0"	1/1

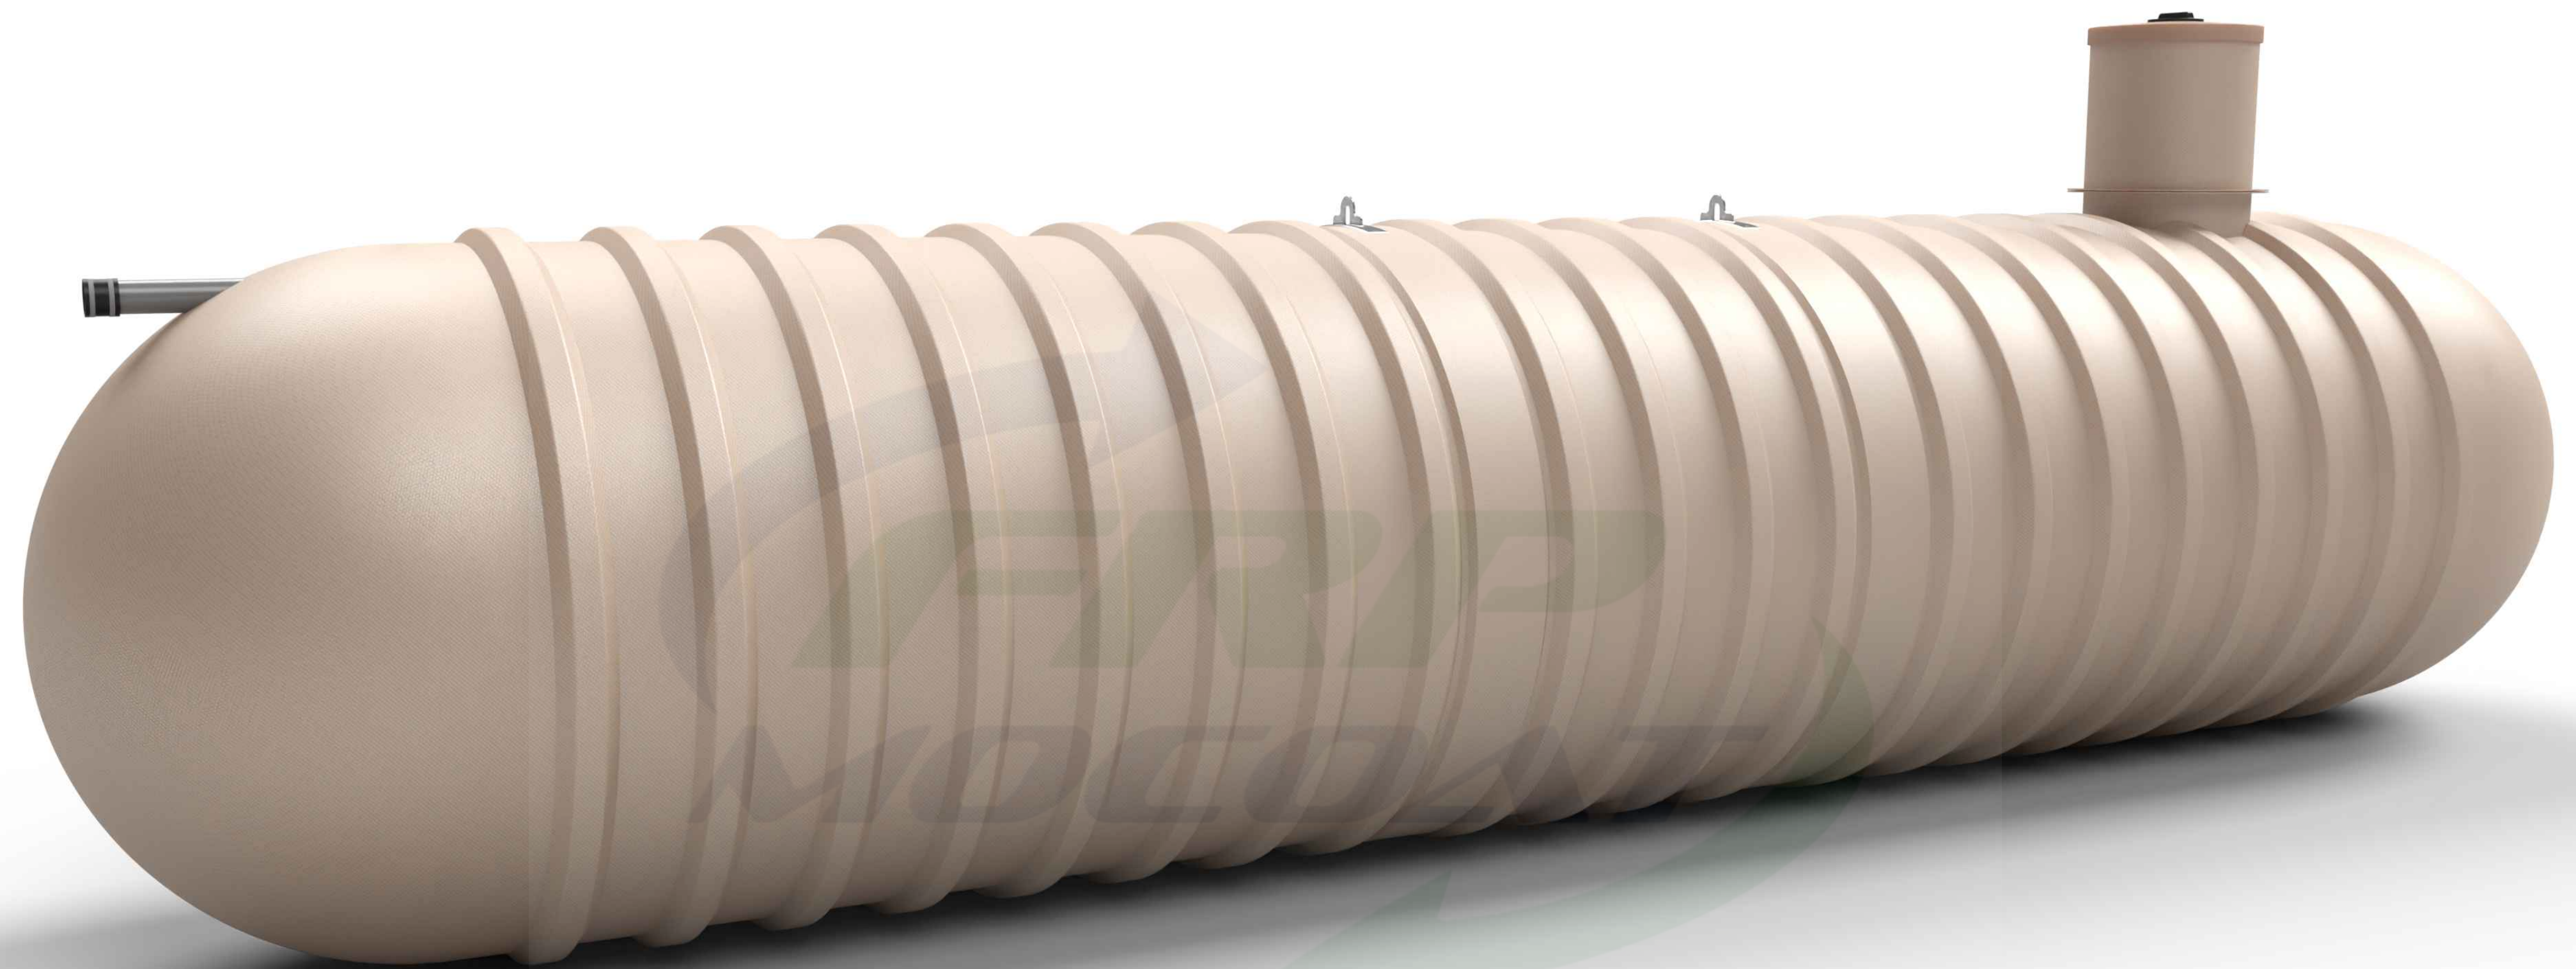

B11000S FIBERGLASS HOLDING TANK

