

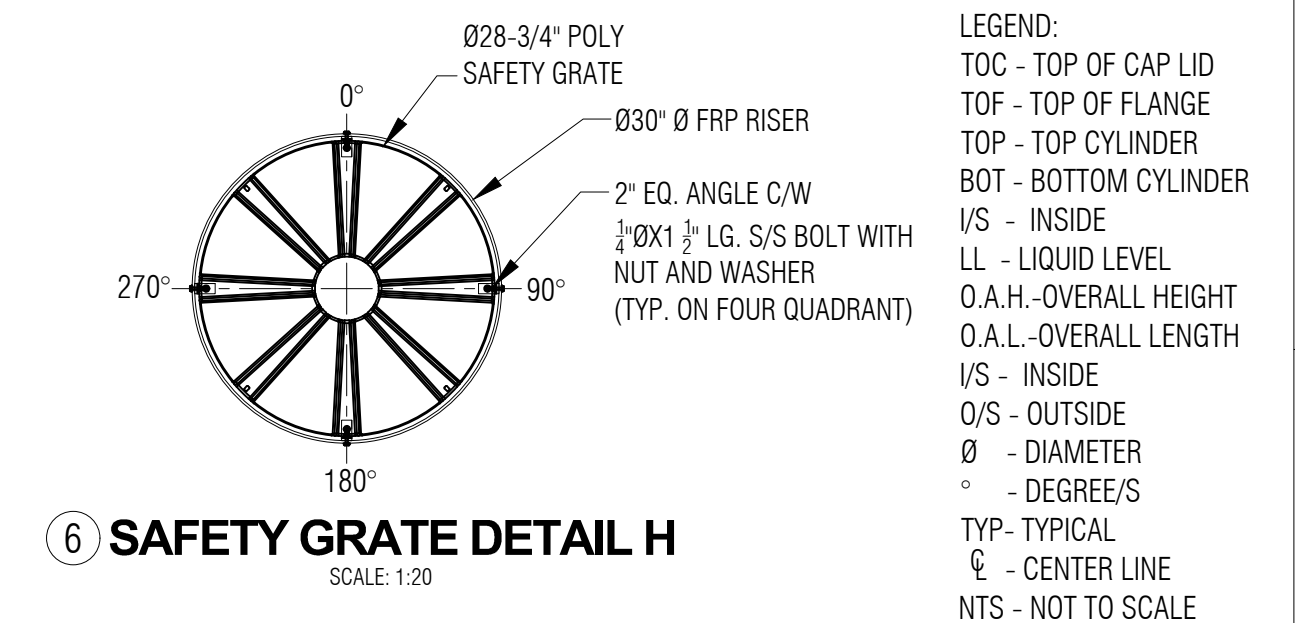
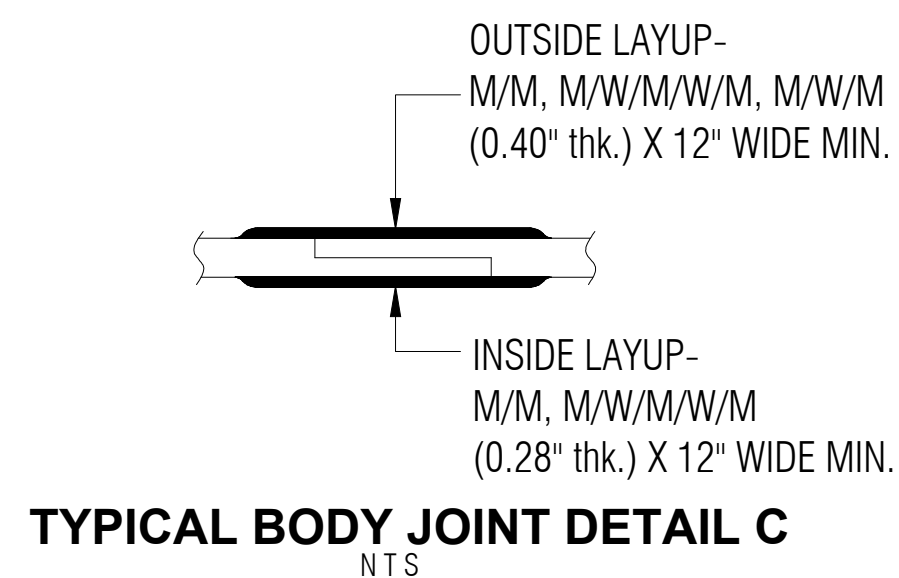
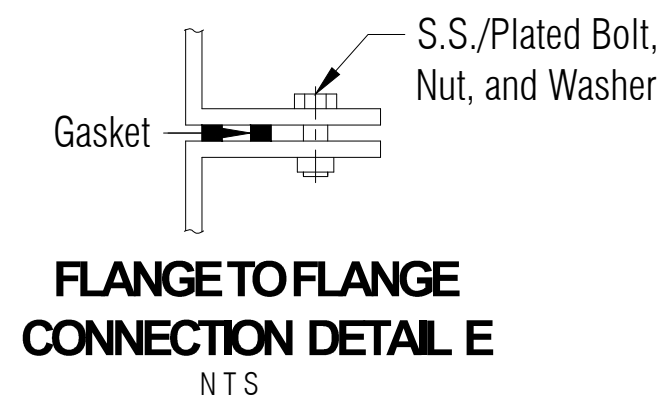
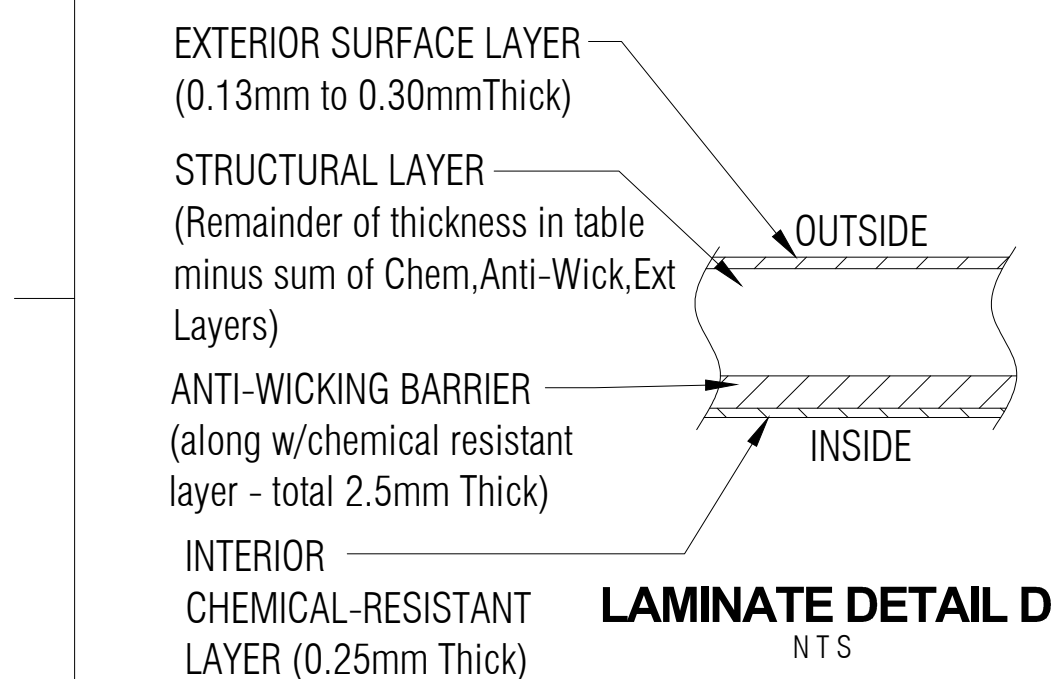


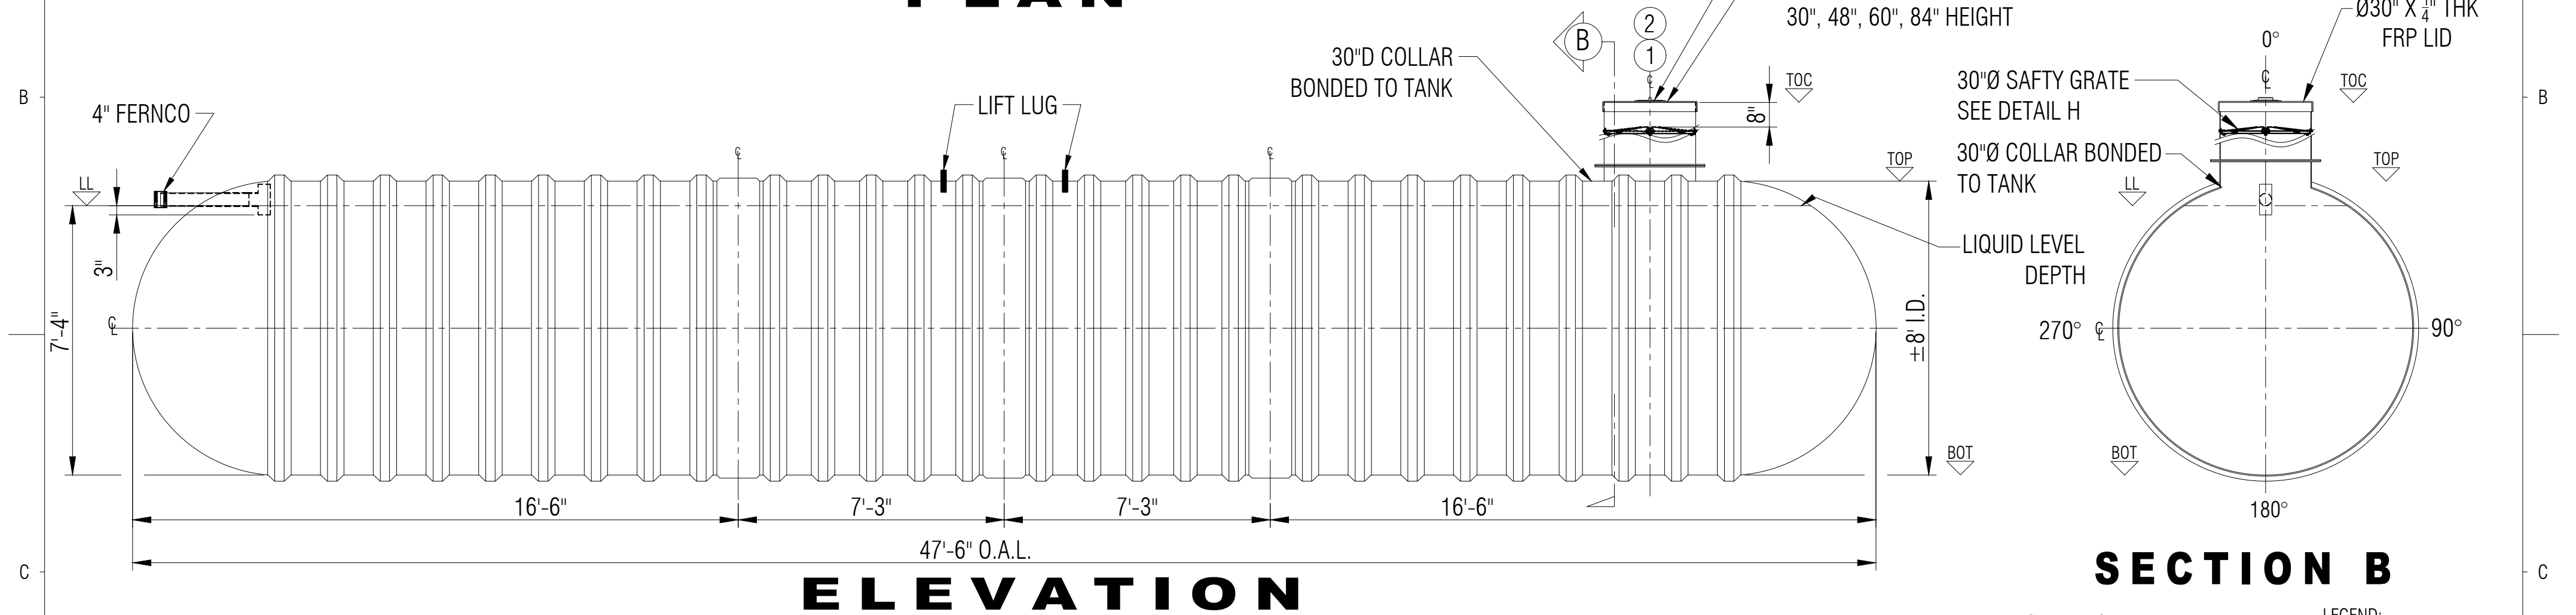


GENERAL NOTES:

- CSA B66 CERTIFIED FRP TANK FOR SEWAGE HOLDING TANK.
- RATED FOR 7' OF BURIAL DEPTH AND NO TRAFFIC LOADING.
- ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN.
- SAFETY GRATE CAN WITHSTAND 91 KG. OF DEAD LOAD.
- DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED.
- 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS.

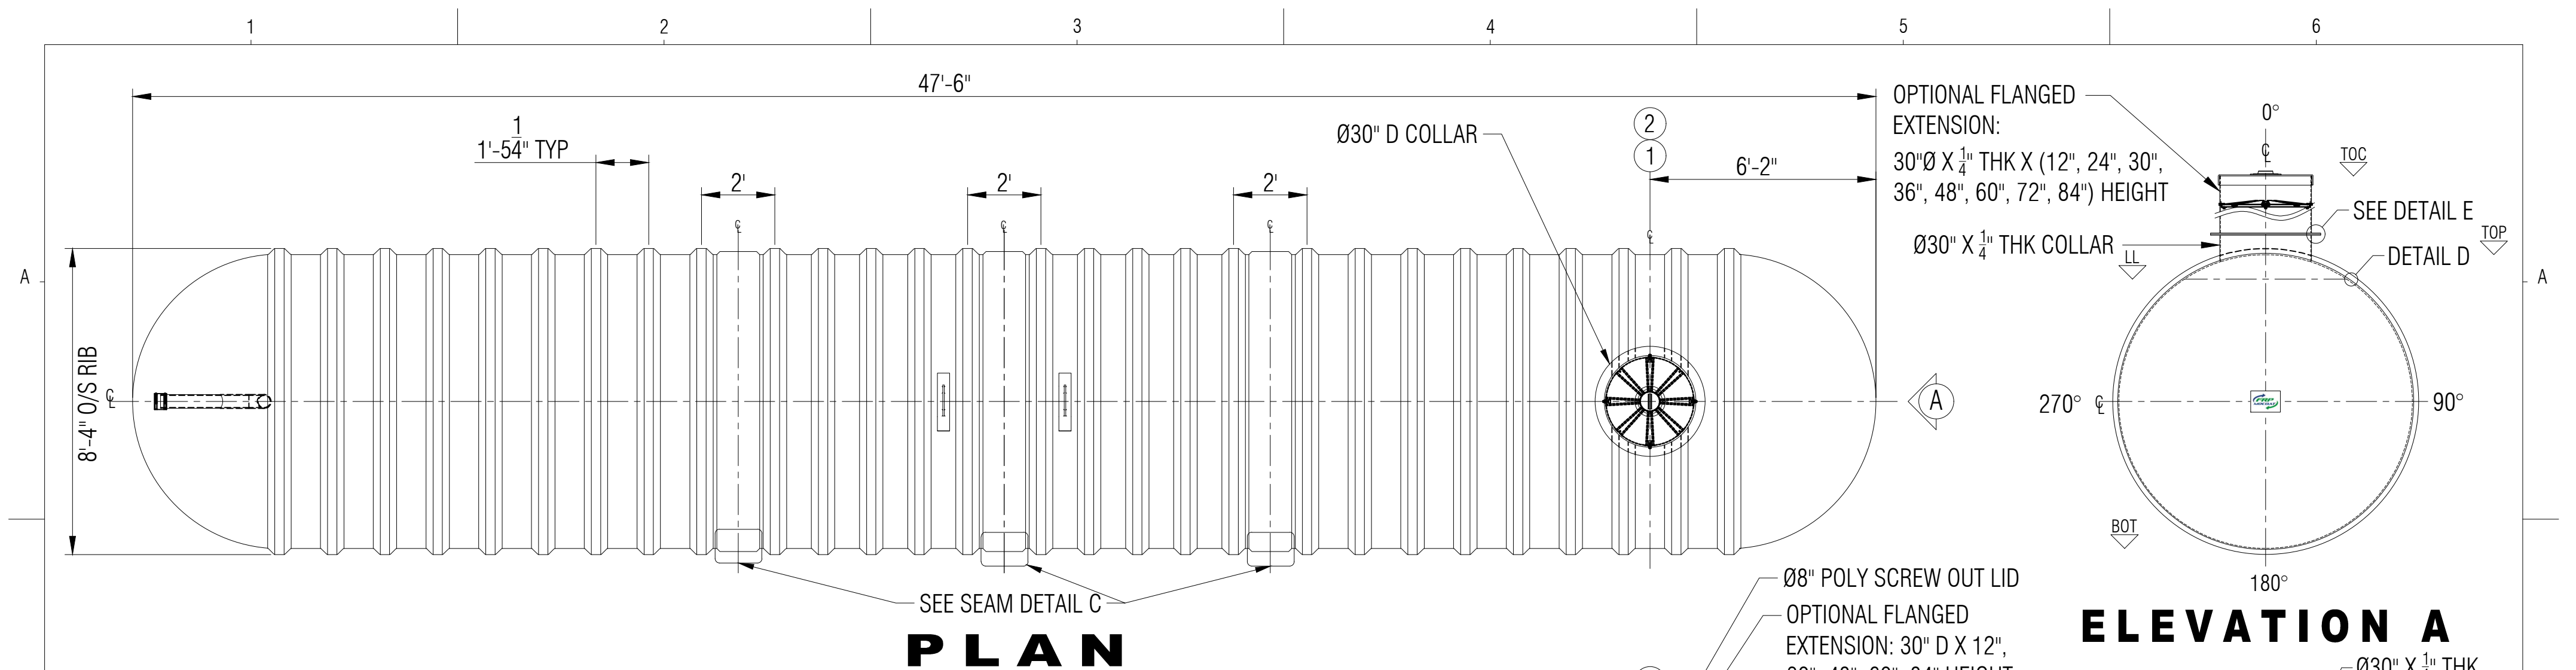

ITEM#	QTY	PART LIST	DESCRIPTION	SHELL THICKNESS:	0.500"	DRAWN:	CCL/ATF	CLIENT: FRP/MOCOAT			
1	1	30" CAP LID W/ 8"D POLY SCREW OUT INSERT		HEMI HEAD THICKNESS:	0.650"	CHECKED:	ATF	TITLE: B14000S FIBERGLASS HOLDING TANK			
2	1	30"Ø MANWAY COLLAR	30"Ø FRP COLLAR	RIBS THICKNESS:	0.25"	DATE:	DEC 10, 2024		FRP MOCOAT FIBERGLASS LTD.		
3	1	4" FERNCO	FLEXIBLE CONNECTOR	RIB SPACING:	17-1/4" (CL to CL)	DESIGNED:	FRP				
4	1	4"Ø PVC PIPE & TEEWYE	INLET	LENGTH:	14,478MM (47'-6")	APPROVED:	MPS	SIZE	DRAWING NUMBER:		REVISION
5	2	MILD STEEL	LIFT LUGS	WORKING CAPACITY:	61,472L (13,522 IG/16,226 USG)	MFG:		C	B14000S		0
6	1	POLYETHYLENE SAFETY GRATE C/W HARDWARE	SAFETY GRATE	OVERALL CAPACITY:	63,794L (14,033 IG/16,840 USG)	PM:		SCALE	WEIGHT:	3,198 KG (7,050 LBS)	
7						SALES:		1:40	BURIAL DEPTH:	RATED 7'-0"	
										SHEET 1/1	

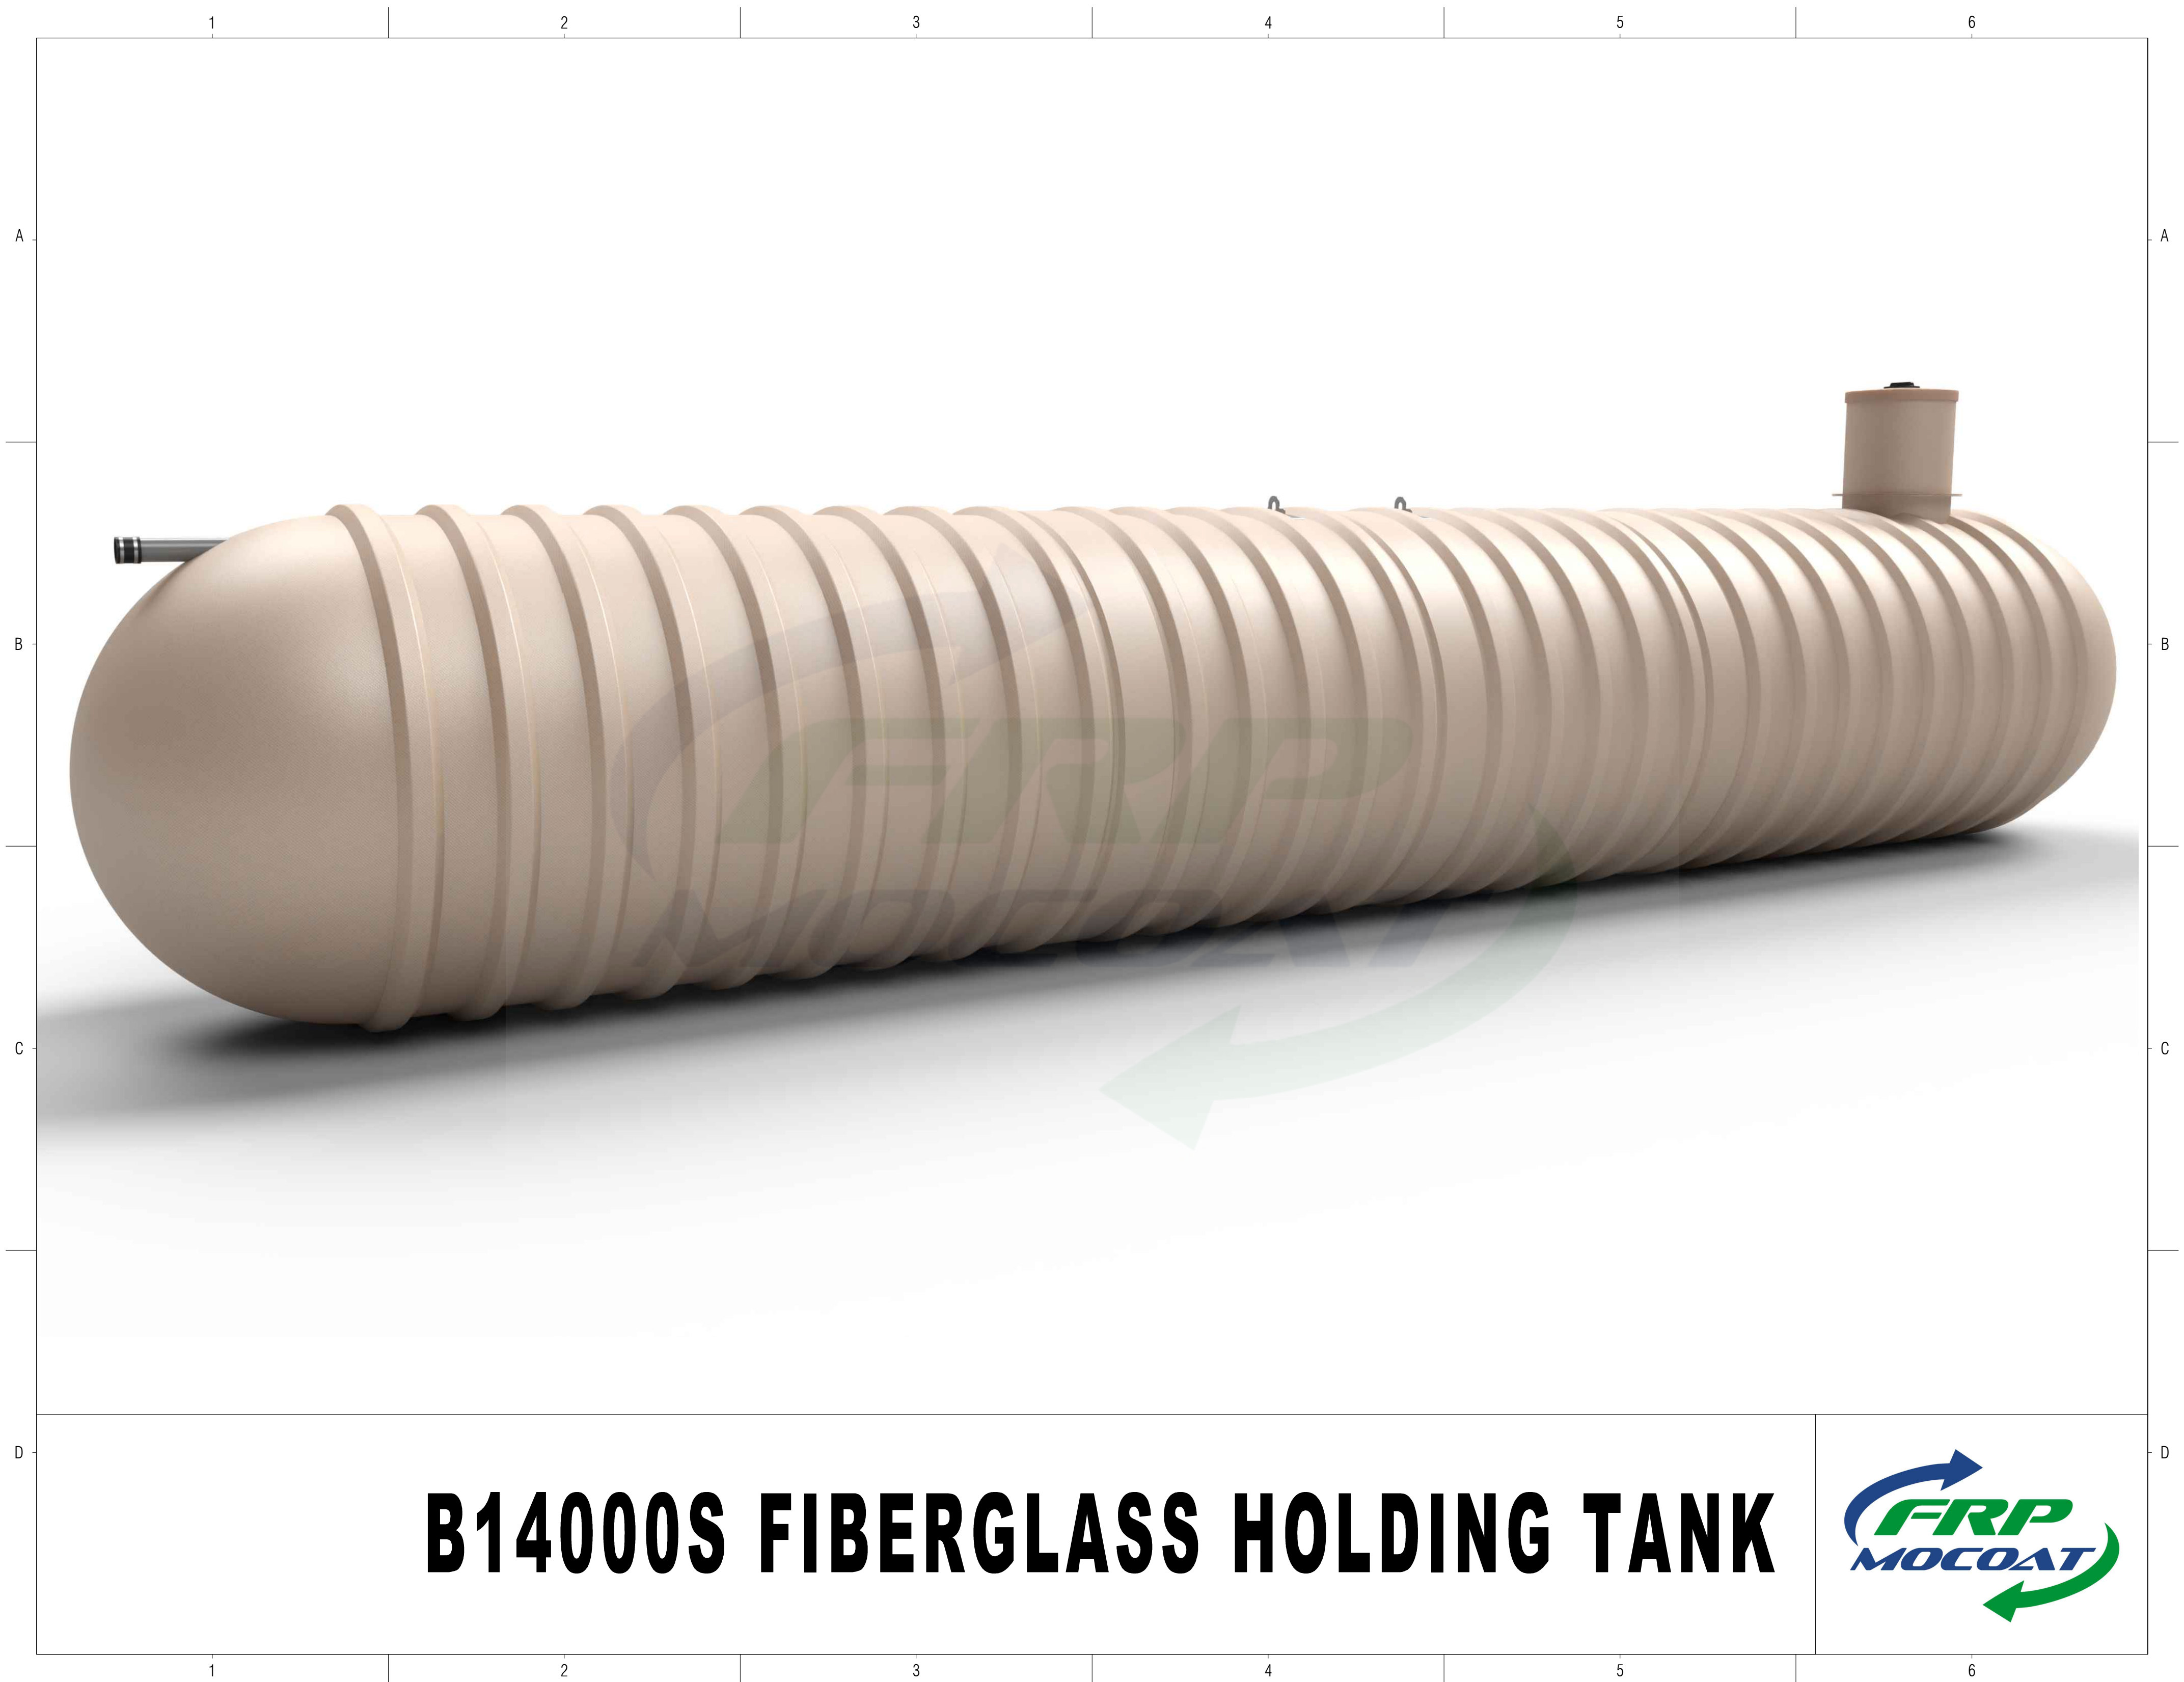

B14000S FIBERGLASS HOLDING TANK

