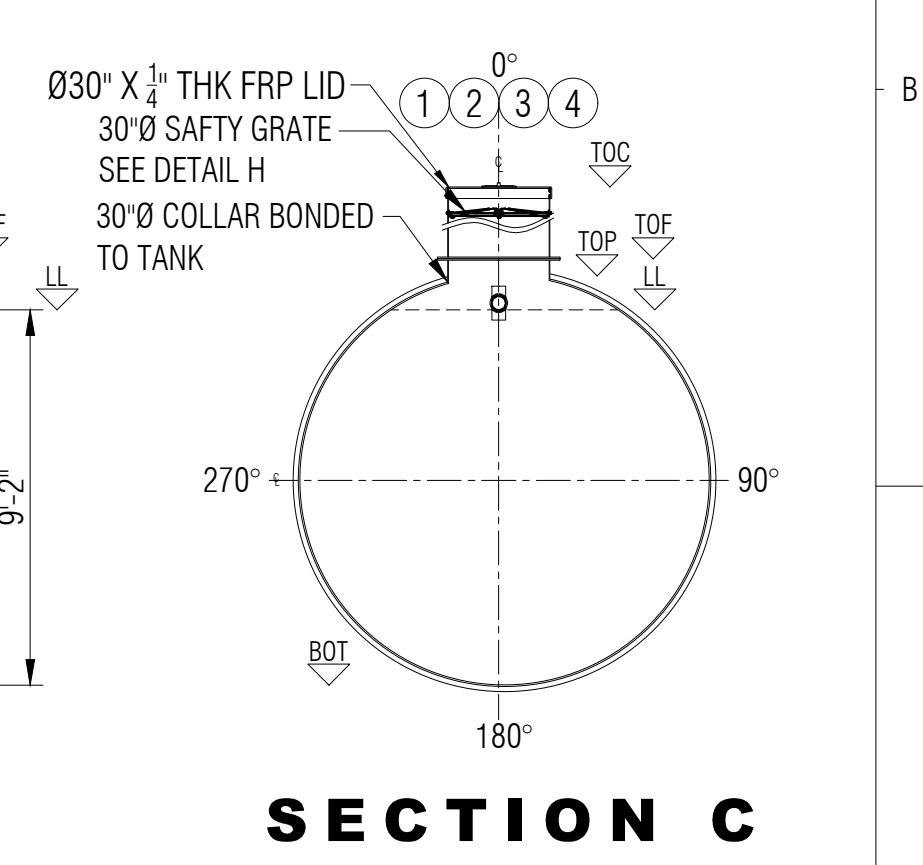
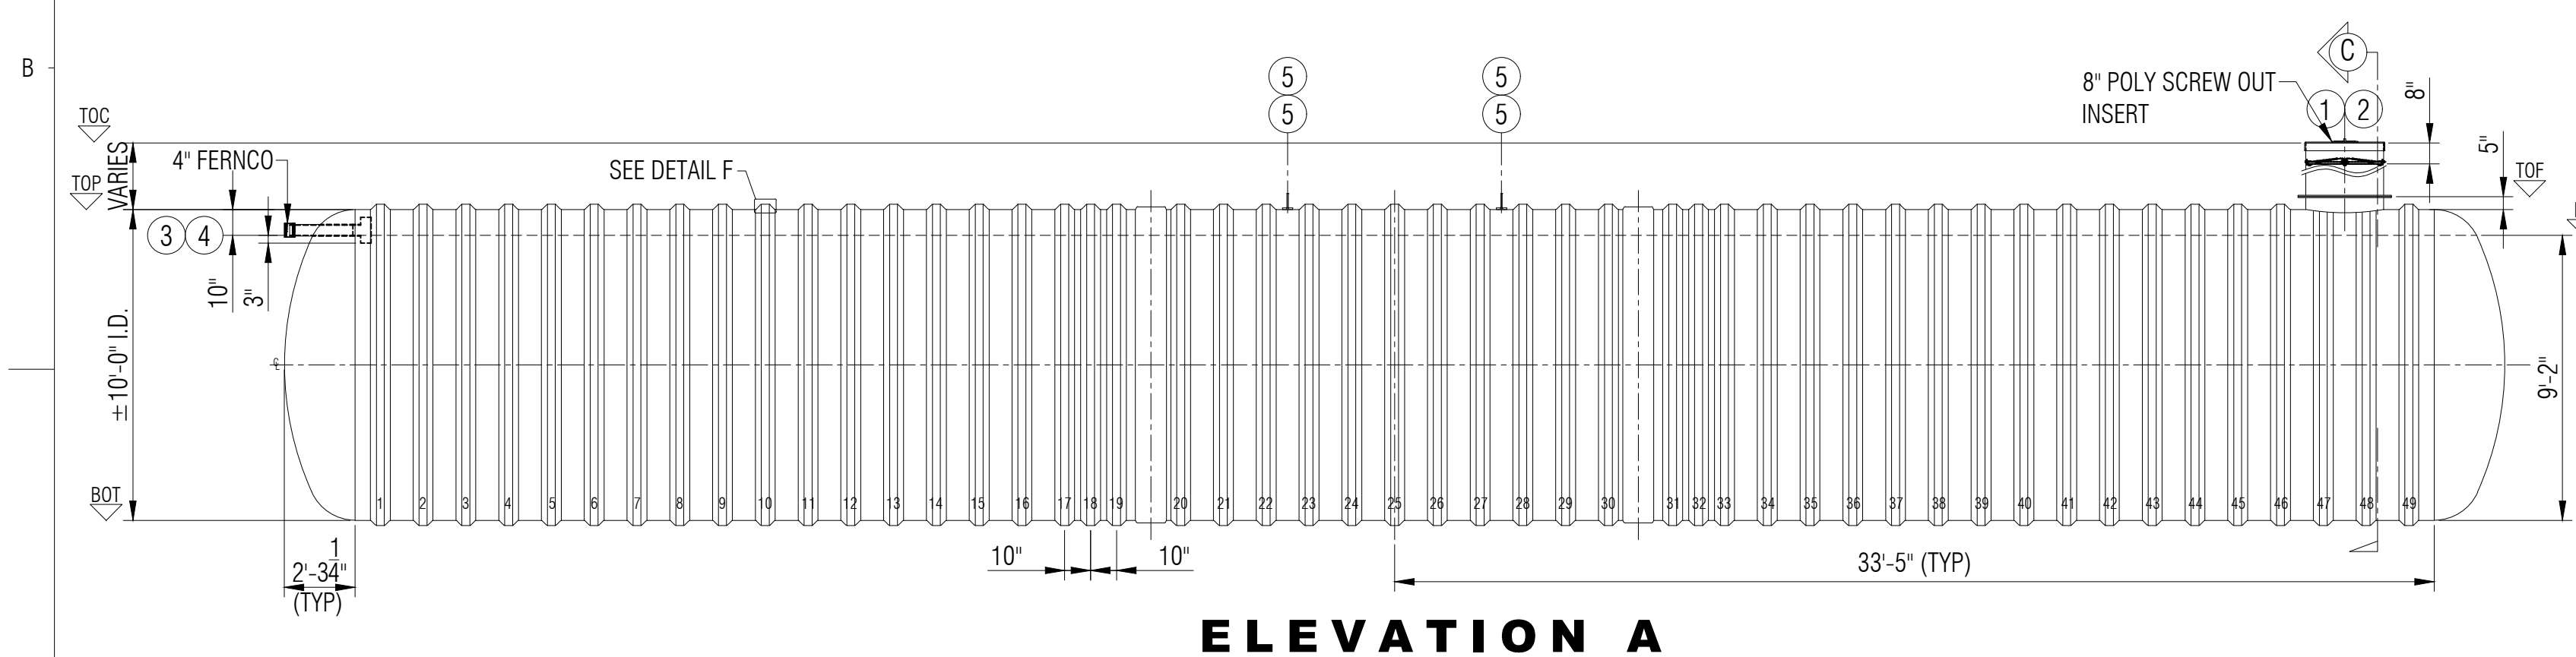
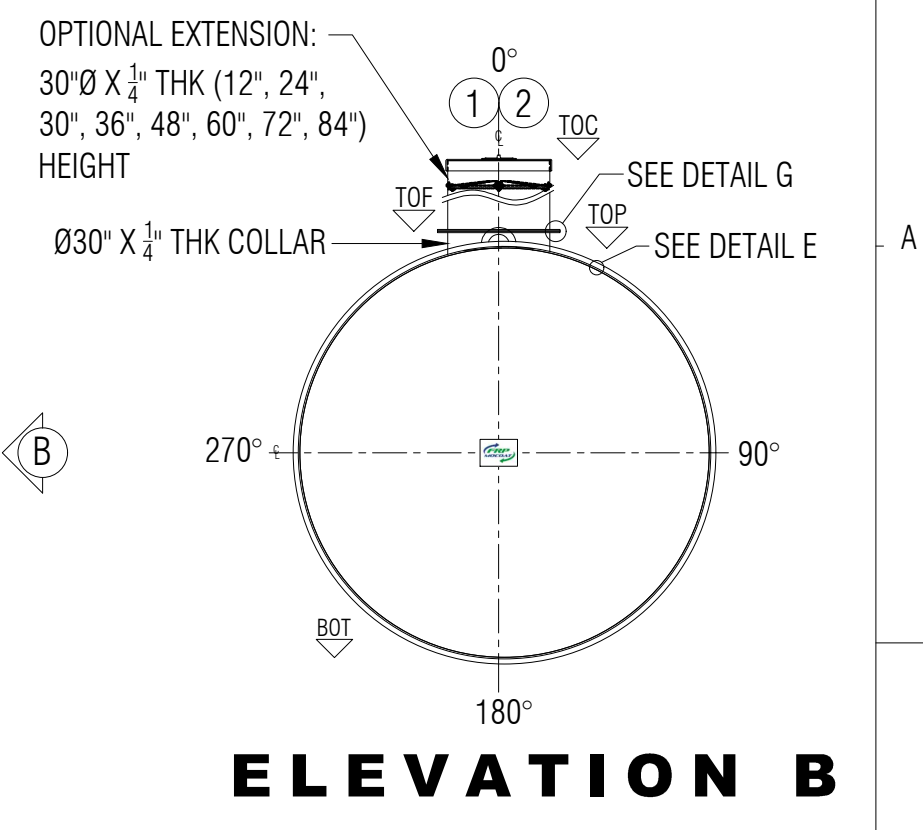
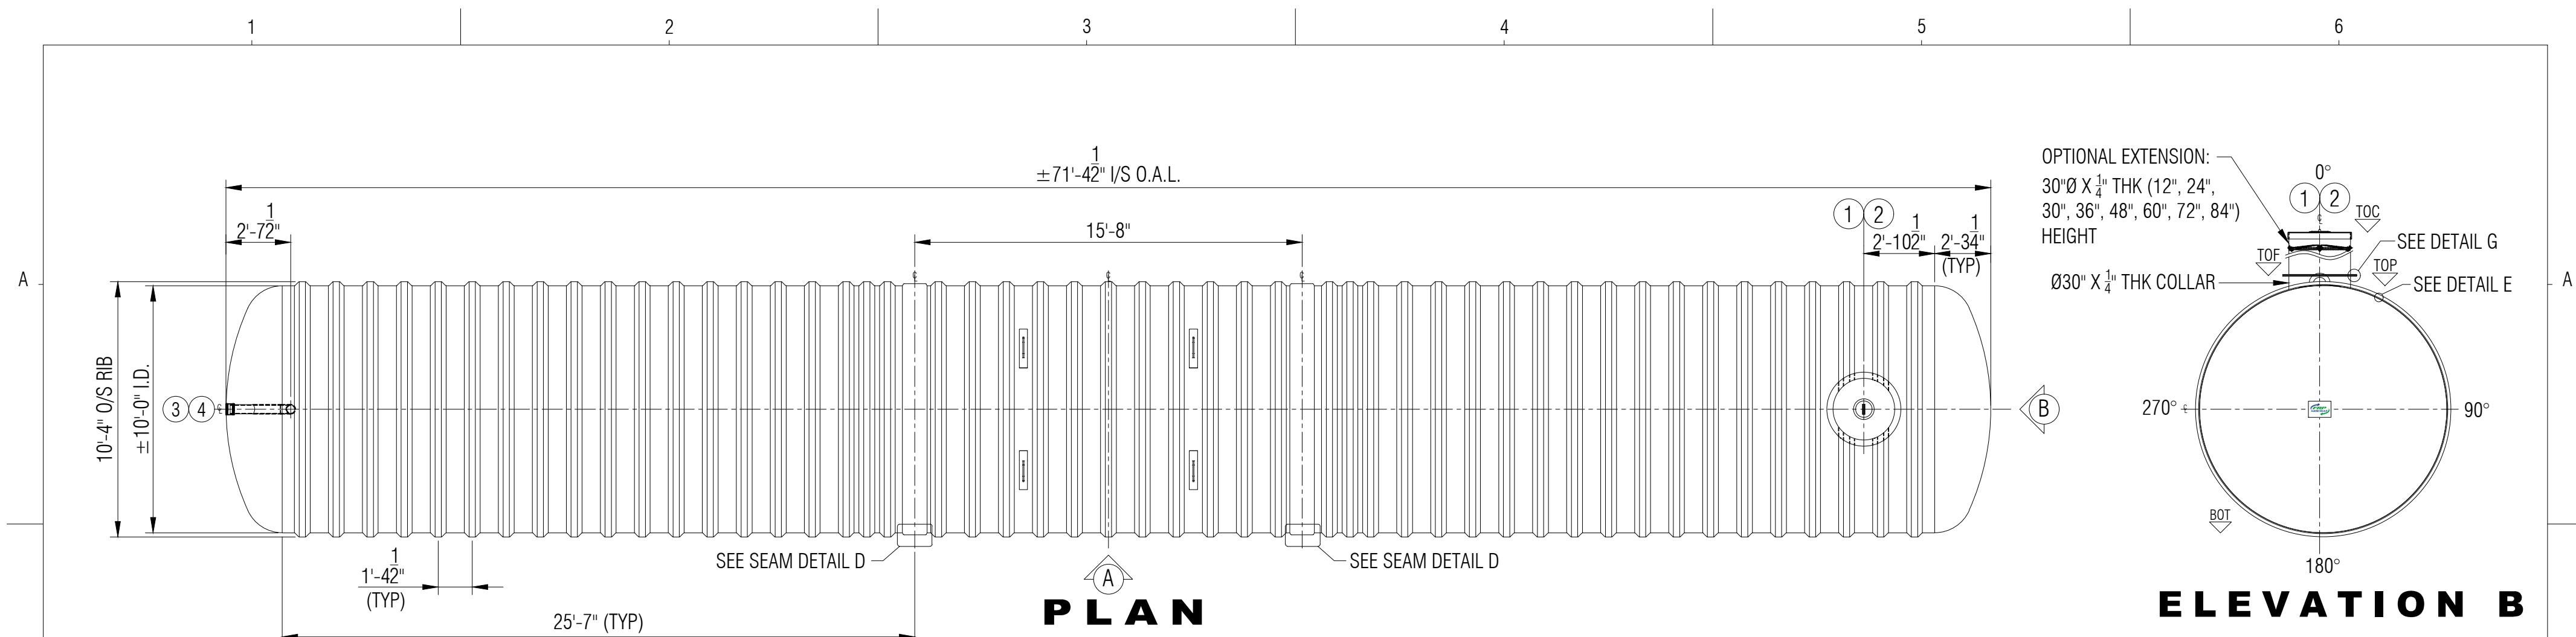


GENERAL NOTES:

- CSA B66 CERTIFIED FRP TANK FOR WASTE WATER.

- RATED FOR 10' OF BURIAL DEPTH AND NO TRAFFIC LOADING.

- ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN.

- SAFETY GRATE CAN WITHSTAND 91 KG. OF DEAD LOAD.

- DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED.

- 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS.

ITEM#	QTY	PART LIST	DESCRIPTION	SHELL THICKNESS:	0.575"	DRAWN:	ATF
1	1	30" CAP LID W/ 8"D POLY SCREW OUT INSERT	FPR LID	DISH HEAD THICKNESS:	1.030"	CHECKED:	
2	1	30"Ø MANWAY COLLAR	30"Ø FRP COLLAR	RIBS THICKNESS:	0.300"+2 WR (0.066")= .366"	DATE:	JAN 16, 2025
3	1	4" FERNCO	FLEXIBLE CONNECTOR	RIB SPACING:	16-1/2" (CL to CL)	DESIGNED:	
4	1	4"Ø PVC PIPE & TEEWYE	INLET	LENGTH:	21,755MM (71'-4 ½")	APPROVED:	MPS
5	4	MILD STEEL	LIFT LUGS	WORKING CAPACITY:	149,100 L (32,797G/39,356USG)	MFG:	DS
6	1	POLYETHYLENE SAFETY GRATE C/W HARDWARE	SAFETY GRATE	OVERALL CAPACITY:	155,100 L (34,117G/41,012 USG)	PM:	GA
				NUMBER OF RIBS:	49	SALES:	TA

FRP/MOCOAT FIBERGLASS LTD.

TITLE: **BX34000S-DB FIBERGLASS HOLDING TANK**

FRP MOCOAT

FIBERGLASS LTD.

SIZE: **C**

DRAWING NUMBER: **BX34000S-DB**

REVISION: **0**

SCALE: **1:60**

WEIGHT: 7,144 KG (15,750 LBS)

BURIAL DEPTH: RATED 10'-0"

SHEET **1/1**

1

2

3

4

5

6



BX34000S-DB FIBERGLASS HOLDING TANK

