

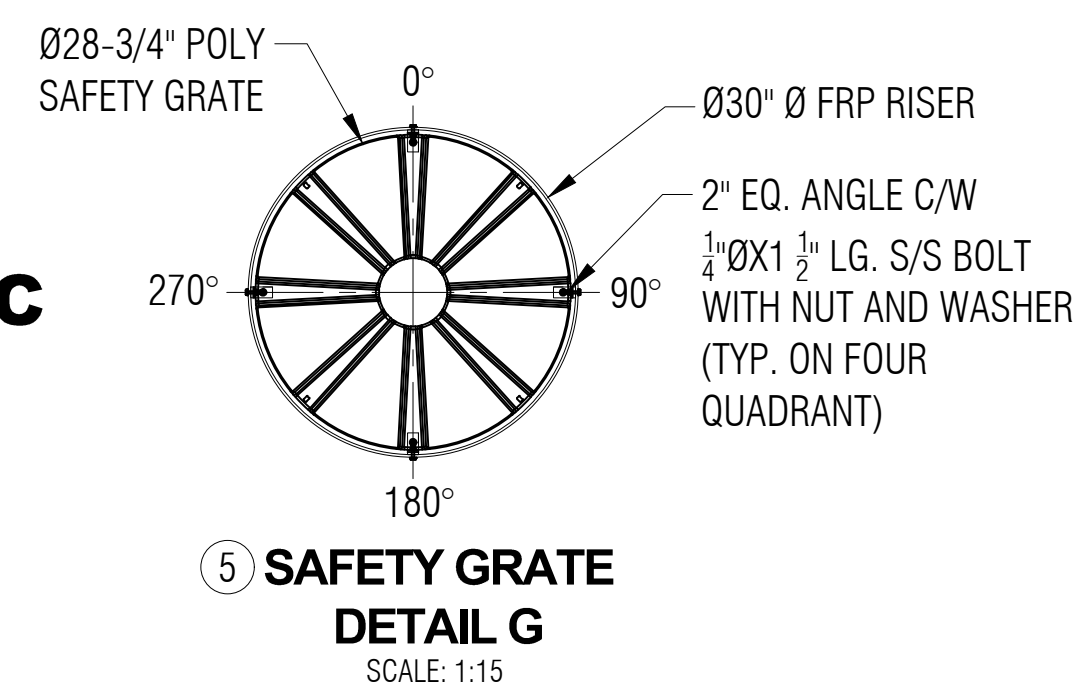
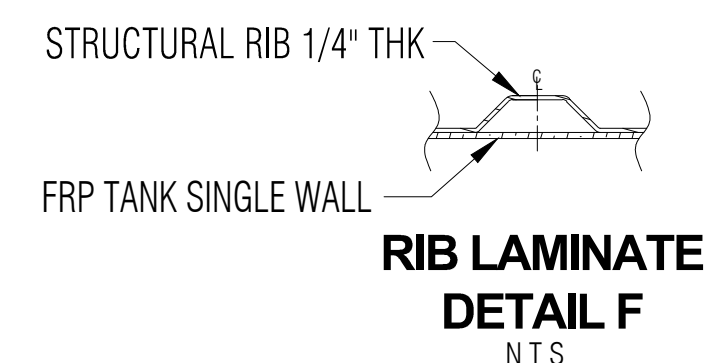
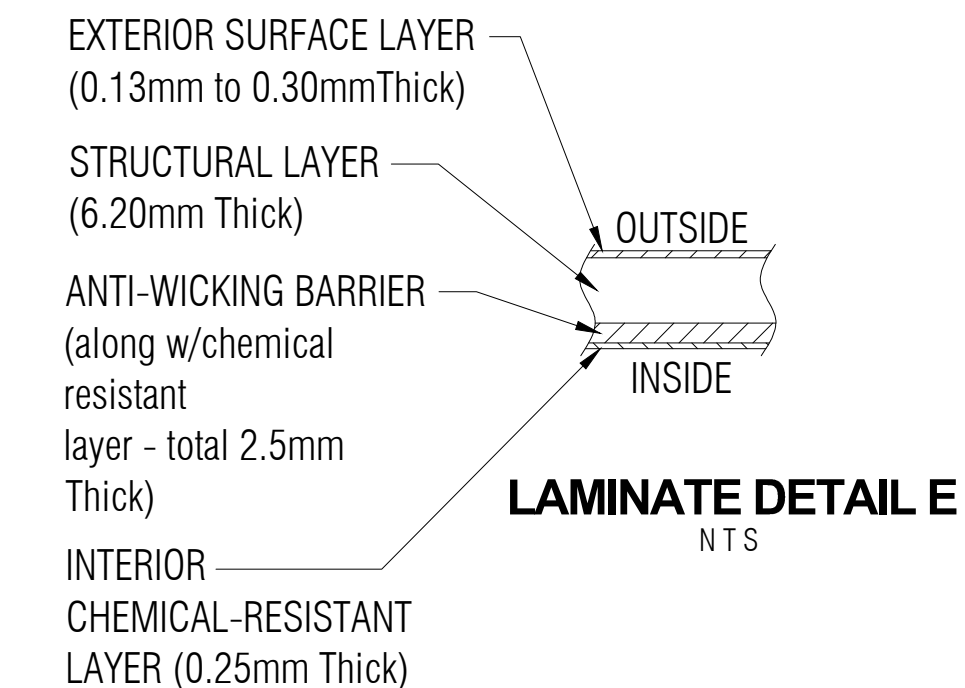
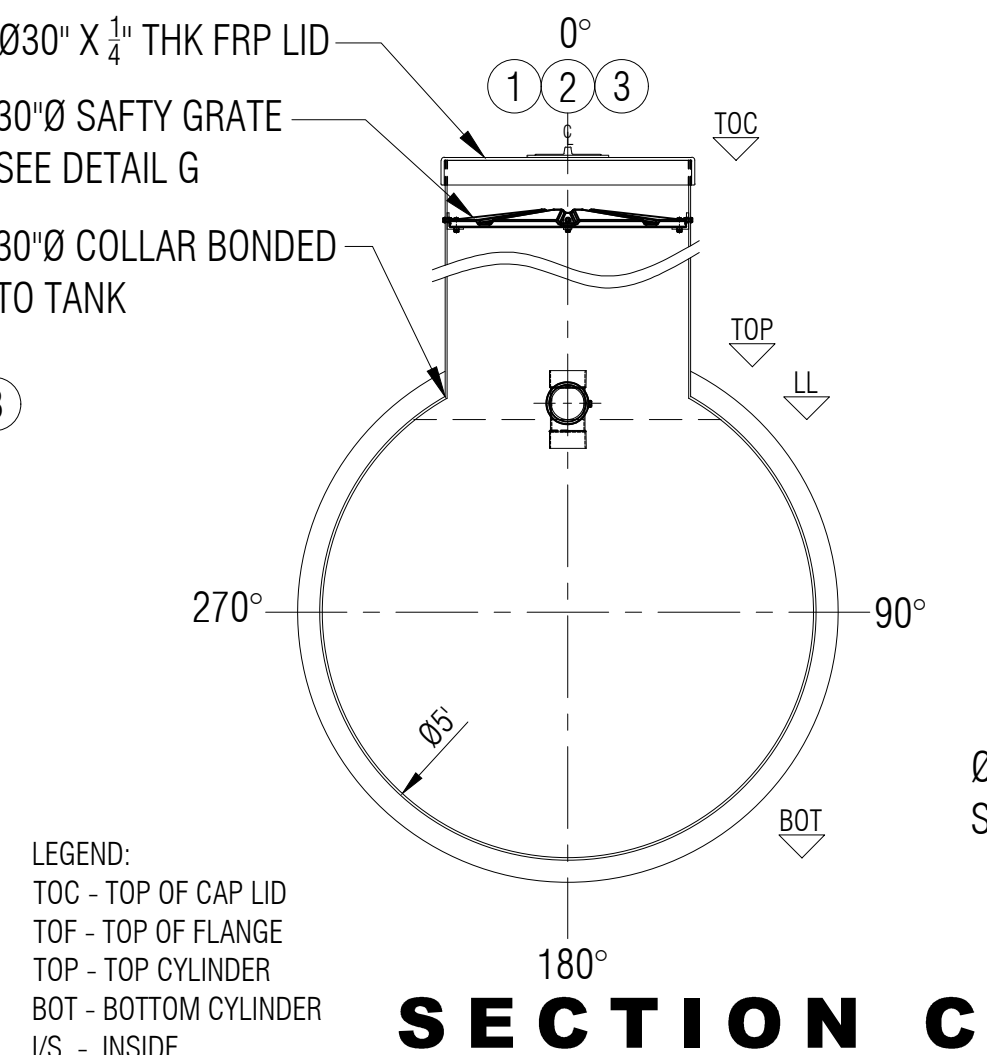


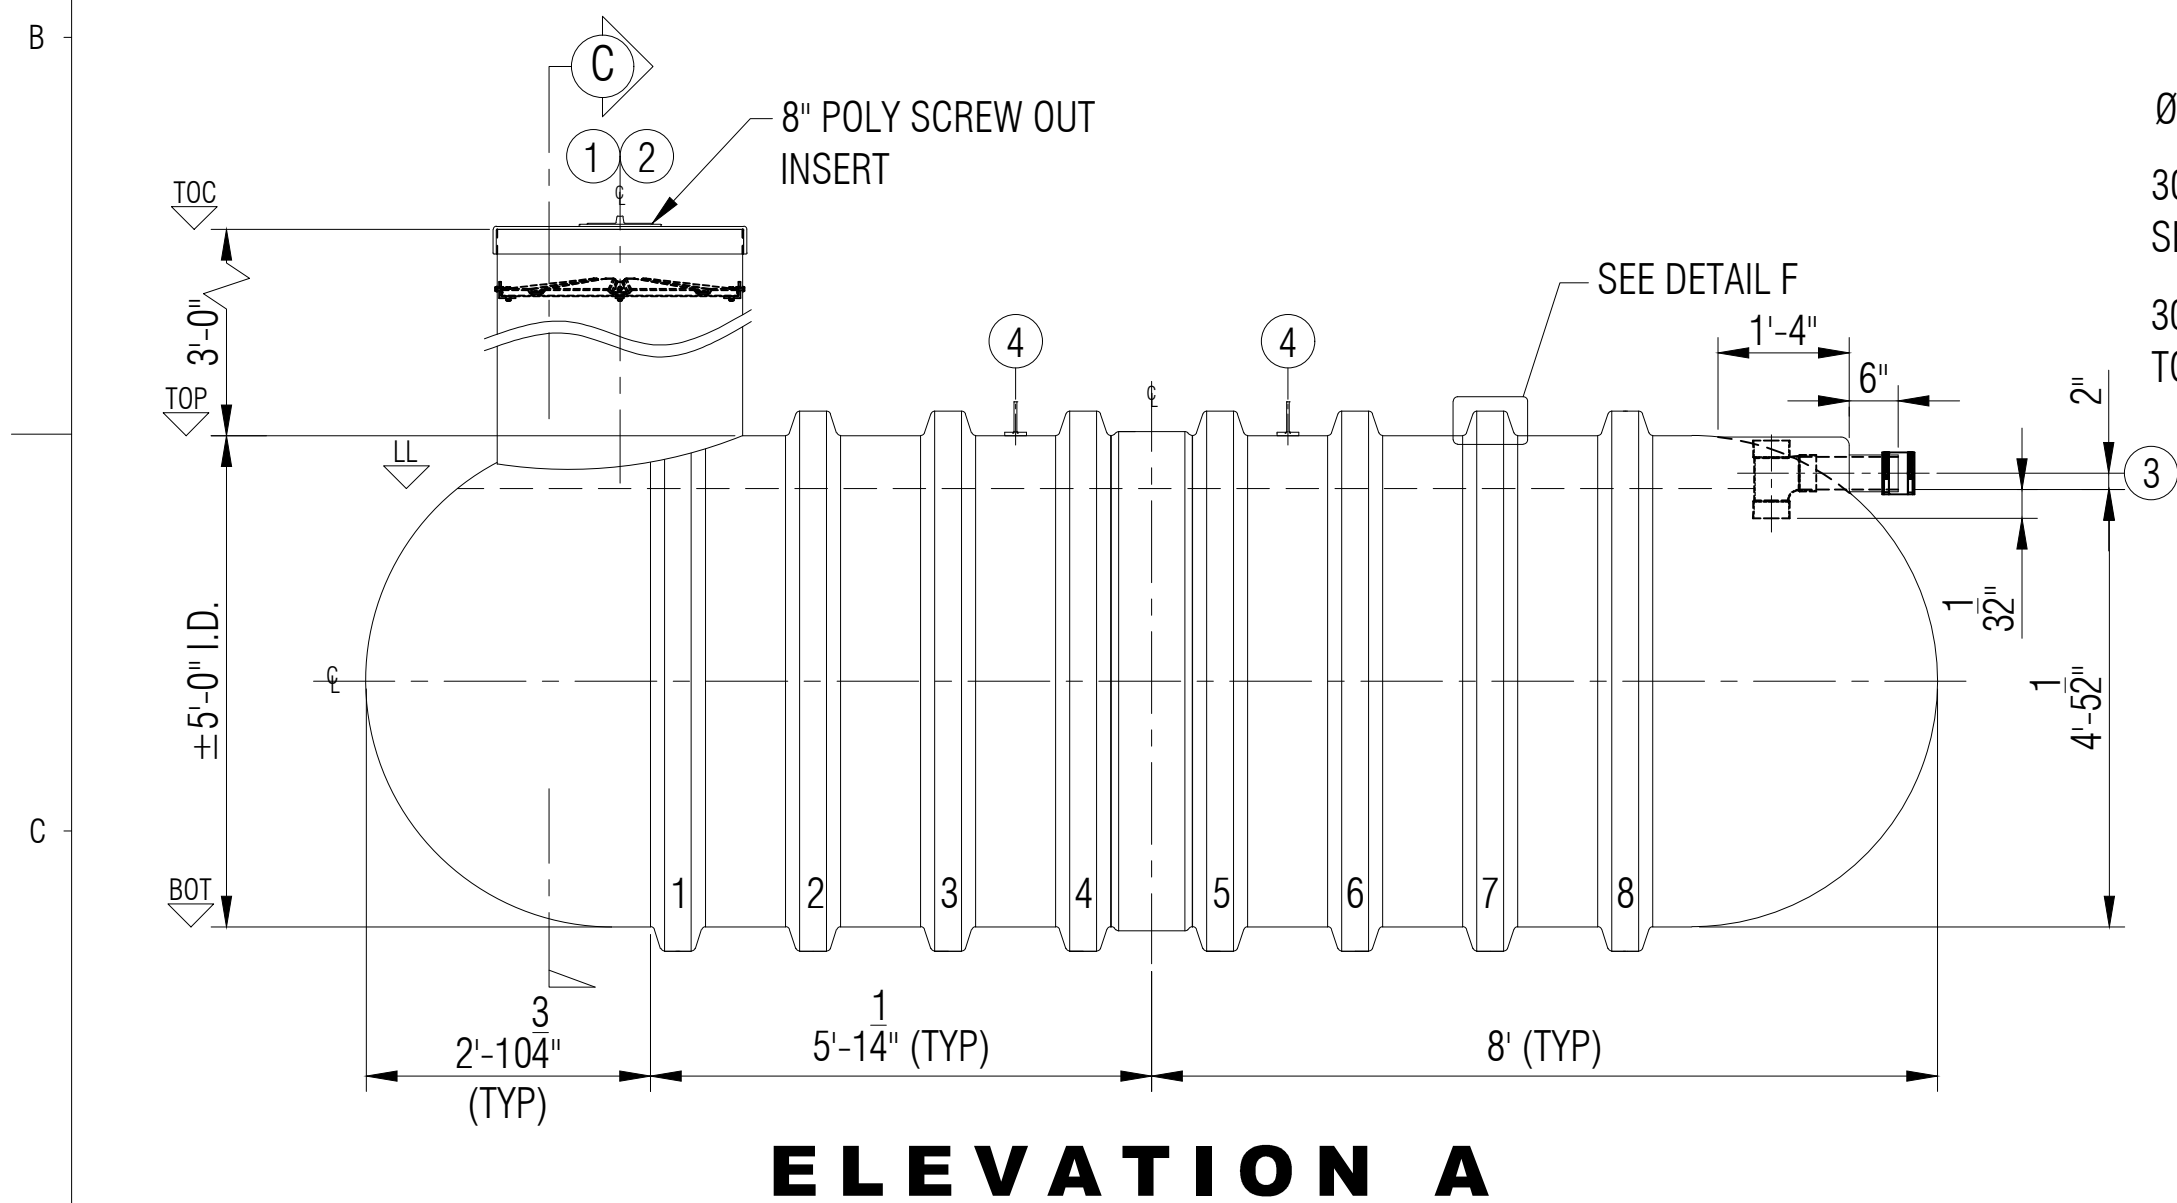


SECTION C

ITEM#	QTY	PART LIST	DESCRIPTION	SHELL THICKNESS:	0.346"	DRAWN:	ATF
1	1	30" CAP LID W/ 8"D POLY SCREW OUT INSERT	FPR LID	DISH HEAD THICKNESS:	0.351"	CHECKED:	
2	1	30"Ø MANWAY COLLAR	30"Ø FRP MANWAY	RIBS THICKNESS:	0.25" WITH 1 WR	DATE:	DEC 4, 2024
3	1	4"Ø PVC DWV STUB PIPE WITH INTERNAL TEEWYE AND FERNCO	INLET	RIB SPACING:	16-1/2" CL TO CL	DESIGNED:	
4	2	MID STEEL	LIFT LUGS	WEIGHT:	397KG (875LBS)	APPROVED:	MPS
5	1	POLYETHYLENE SAFETY GRATE C/W HARDWARE	SAFETY GRATE	LENGTH:	4,877MM (16'-0")	MFG:	DS
6				WORKING CAPACITY:	7,594 L (1,670IG/2,004 USG)	QA:	GA
7				OVERALL CAPACITY:	7,955 L (1,750IG/2,100 USG)	SALES:	TA



 **FRPMOCOAT**
FIBERGLASS LTD.

SIZE C	DRAWING NUMBER: H1750-DB		REVISION 0
SCALE 1:25	WEIGHT:		SHEET 1/1
	BURIAL DEPTH:	RATED 12"-0"	

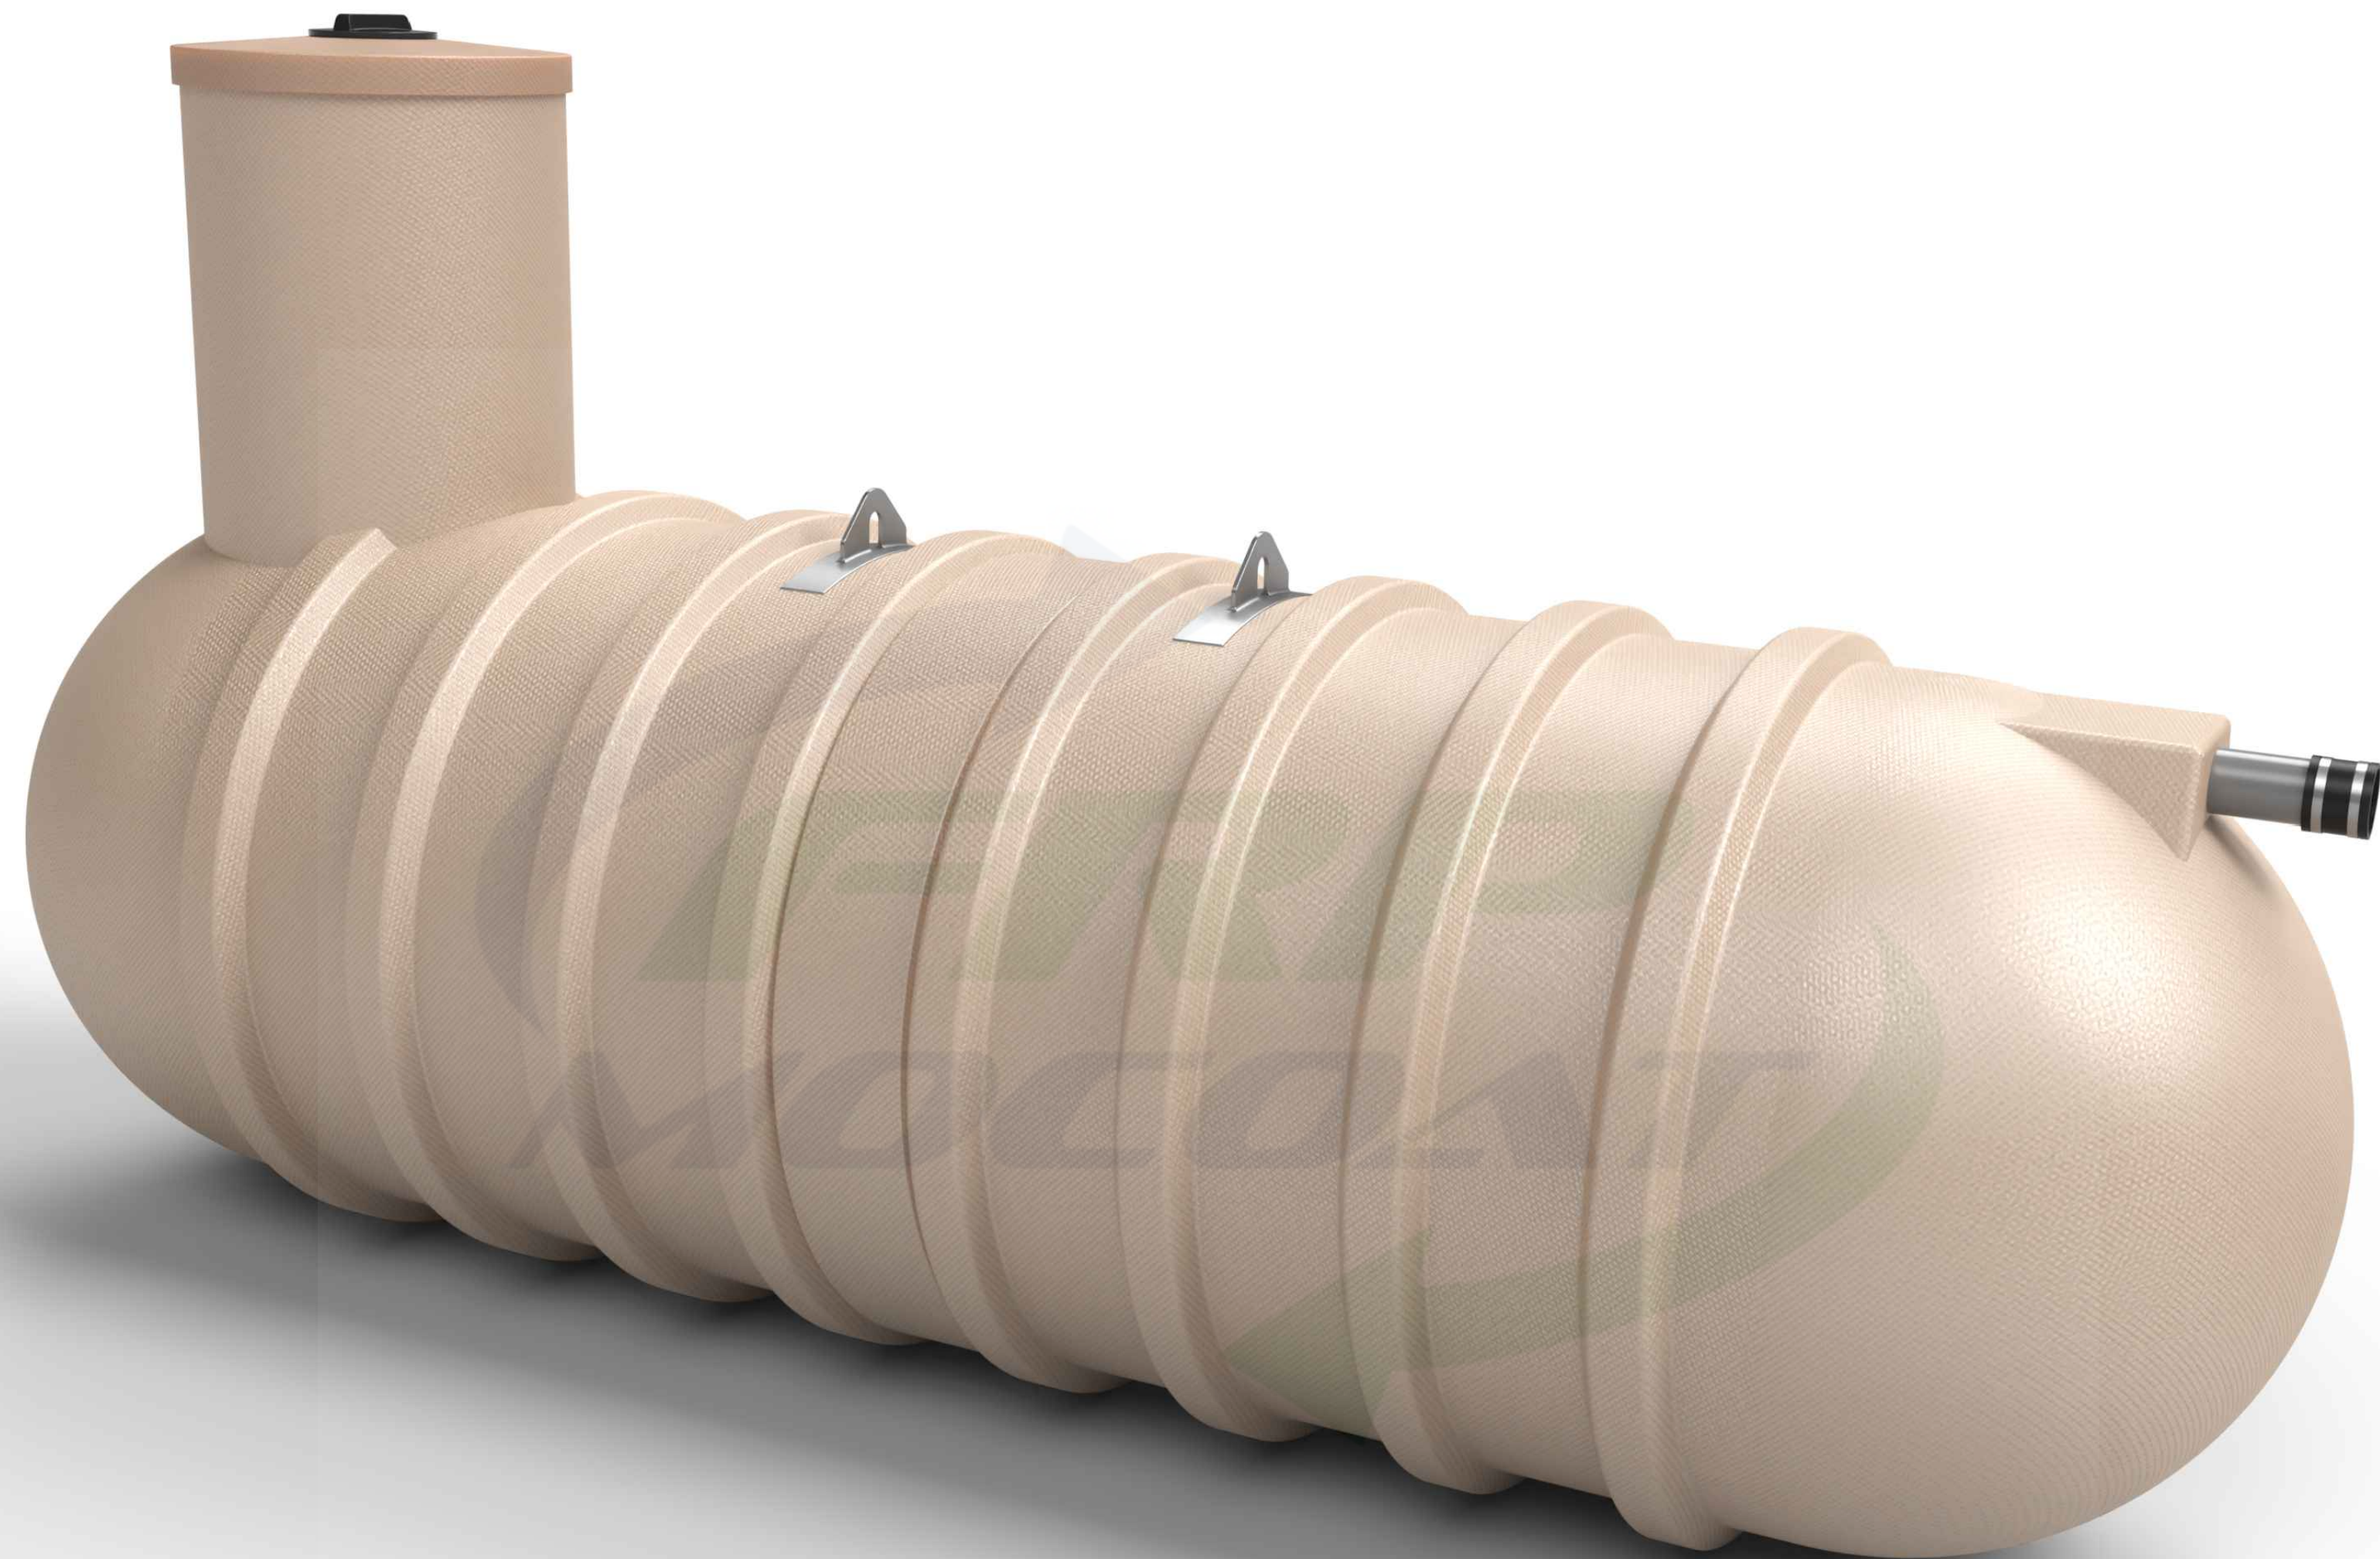

H1750-DB FRP SEWAGE HOLDING TANK

