




GENERAL NOTES:

- CSA B66 CERTIFIED FRP SEPTIC TANK.
- RATED FOR 12' OF BURIAL DEPTH AND NO TRAFFIC LOADING.
- BAFFLE WALL IS INSTALLED. VOLUMES ARE APPROXIMATE.
- ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN.
- SAFETY GRATE CAN WITHSTAND 91 KG. OF DEAD LOAD.
- DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED.
- 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS.

ITEM#	QTY	PART LIST	DESCRIPTION	SHELL THICKNESS:	0.346"	DRAWN:	ATF
1	1	30" CAP LID	FPR LID	DOME HEAD THICKNESS:	0.351"	CHECKED:	
2	1	30"Ø MANWAY COLLAR	30"Ø FRP MANWAY	RIBS THICKNESS:	0.30" WITH 1 WR	DATE:	DEC 4, 2024
3	1	4"ØX12"L PVC DWV STUB PIPE WITH INTERNAL TEEWYE AND FERNCO	INLET	WEIGHT:	340KG (750LBS)	DESIGNED:	
4	1	FRP FULL BAFFLE WALL W/ REINFORCEMENT	BAFFLE WALL	LENGTH:	3,048MM (10'-0")	APPROVED:	MPS
5	1	MILD STEEL LUG	LIFT LUG	SEPTIC CHAMBER:	3,159L (695IG/834 USG)	MFG:	DS
6	1	POLYETHYLENE SAFETY GRATE C/W HARDWARE	SAFETY GRATE	EFFLUENT CHAMBER:	965L (212IG/254 USG)	QA:	GA
7				OVERALL CAPACITY:	4,546L (1,000IG/1,200 USG)	SALES:	TA

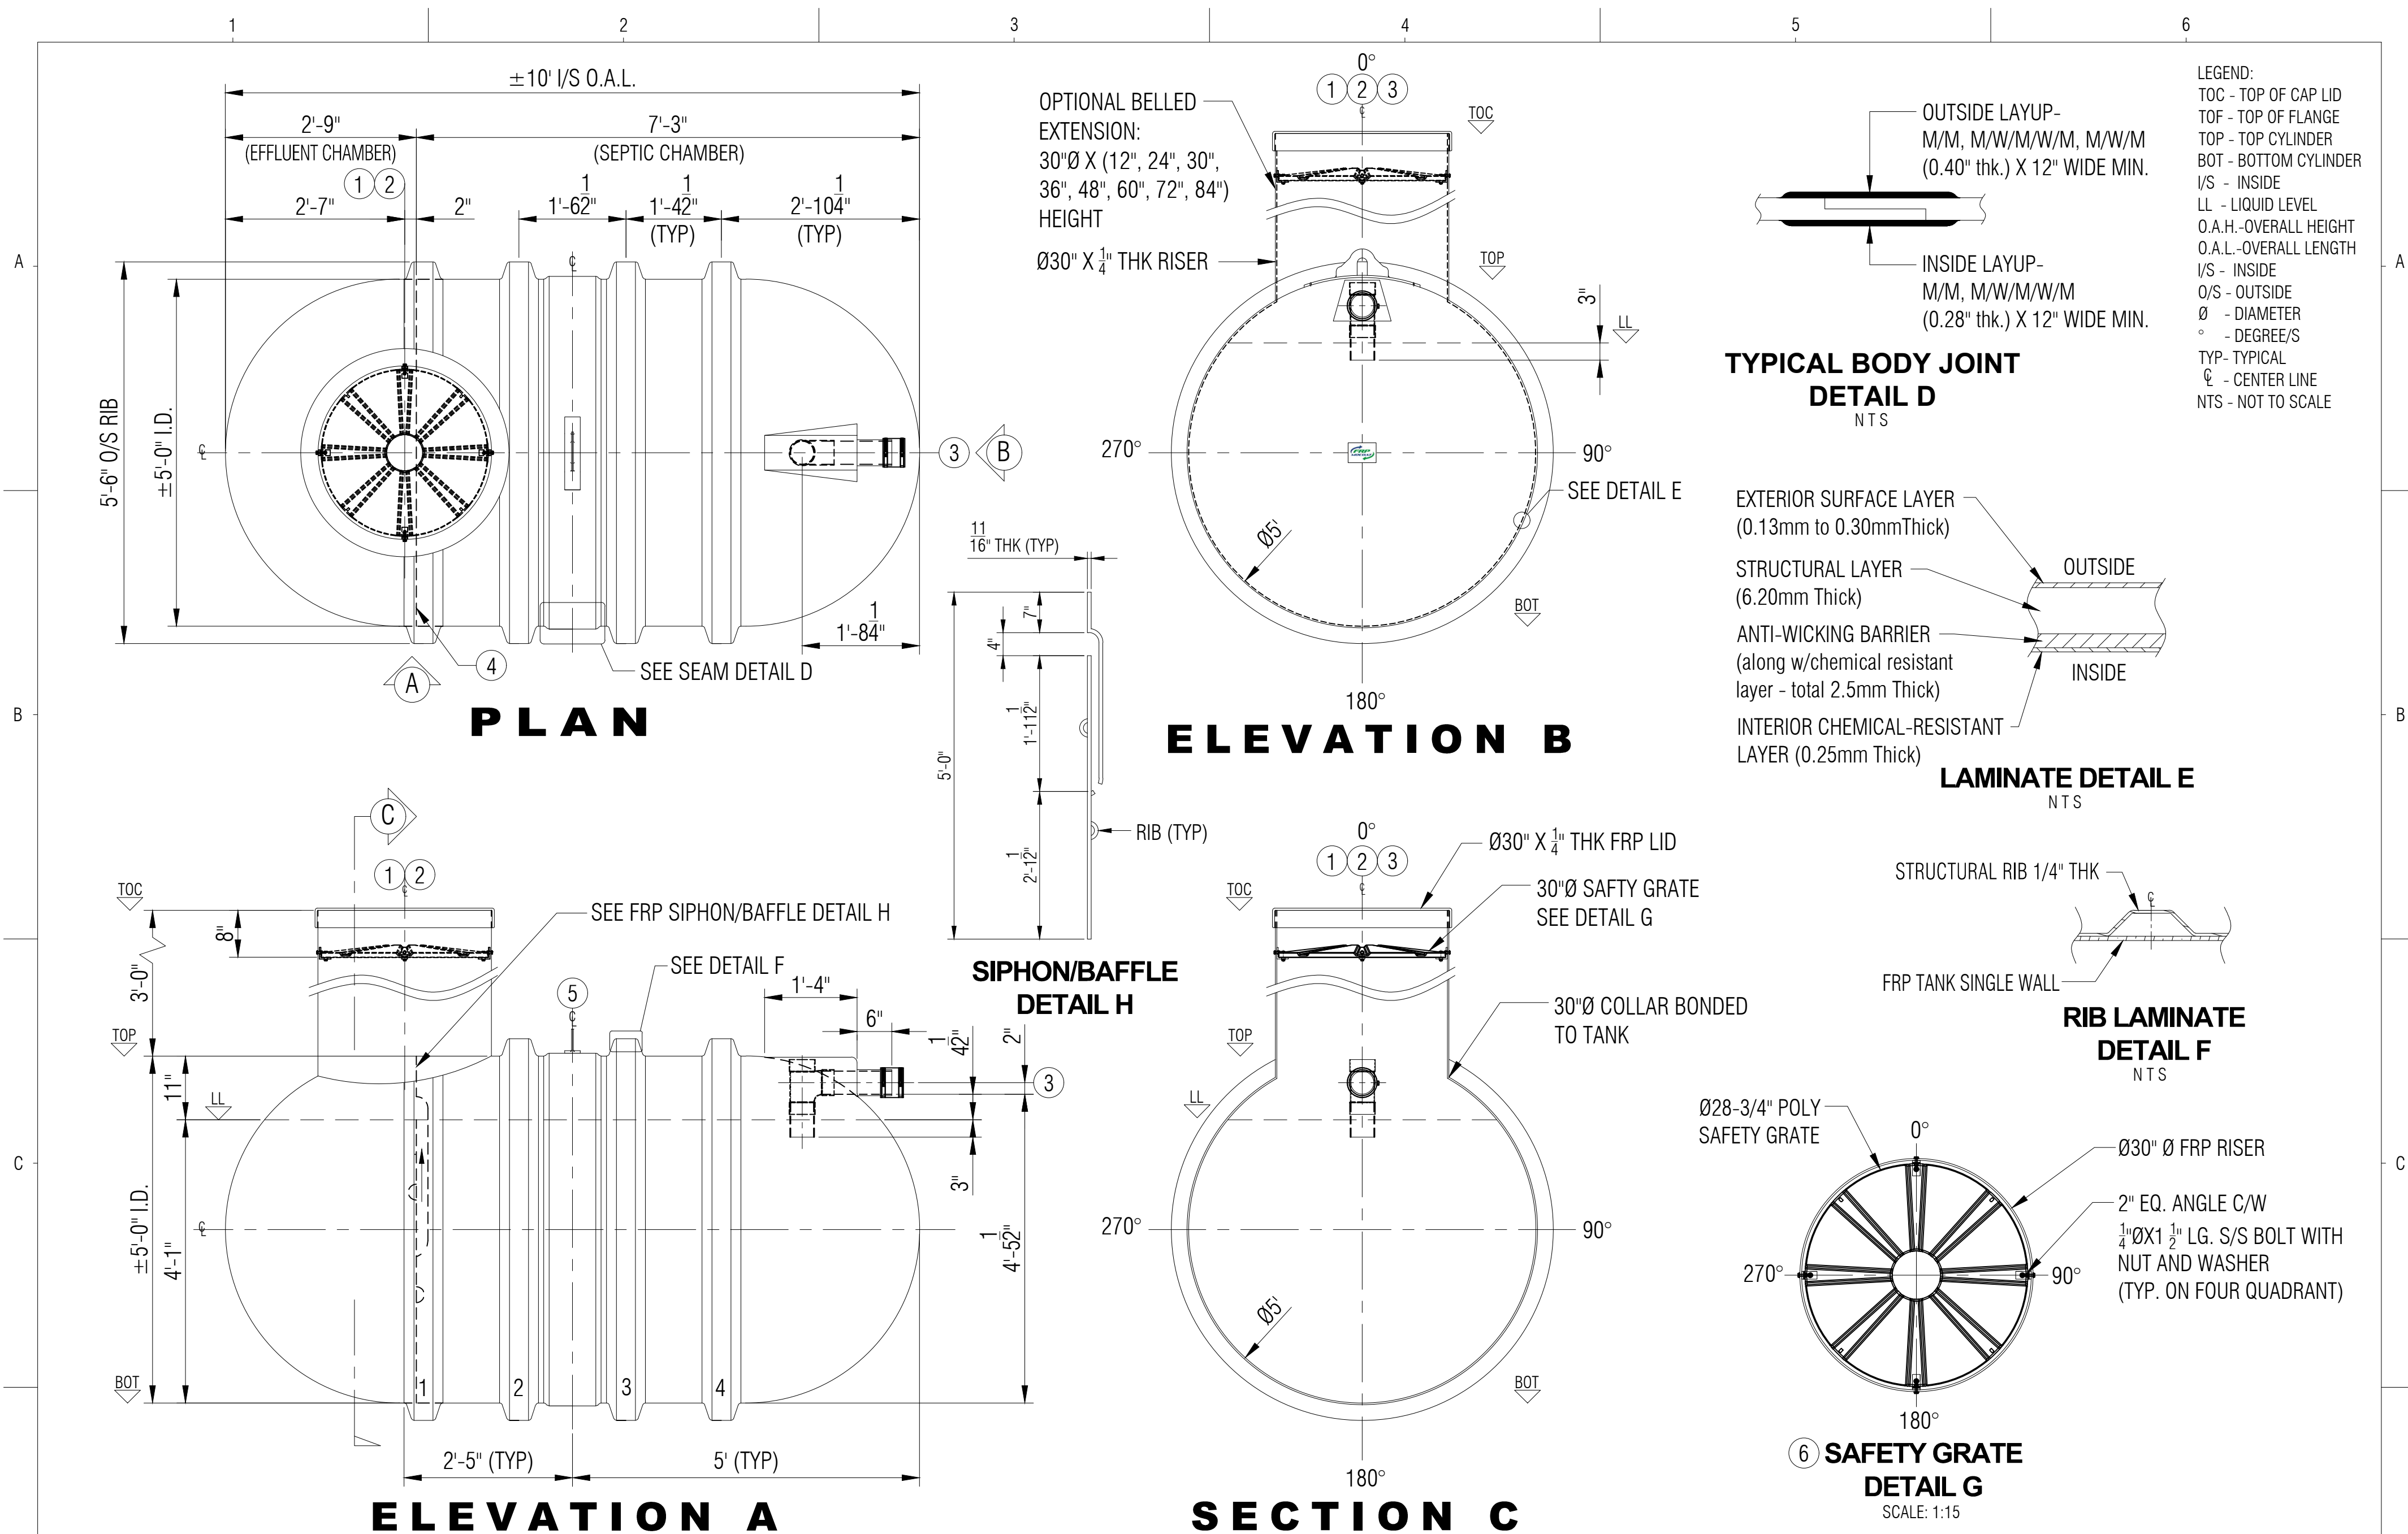

CLIENT: FRP/MOCOAT FIBERGLASS LTD.
TITLE: **P1000-DB FRP PUMPOUT TANK**
FRP MOCOAT
FIBERGLASS LTD.

SIZE: **C**
SCALE: **1:20**

DRAWING NUMBER: **P1000-DB**
WEIGHT:
BURIAL DEPTH:

REVISION: **0**
SHEET: **1/1**
RATED 12'-0"



P1000-DB FRP PUMPOUT TANK

