



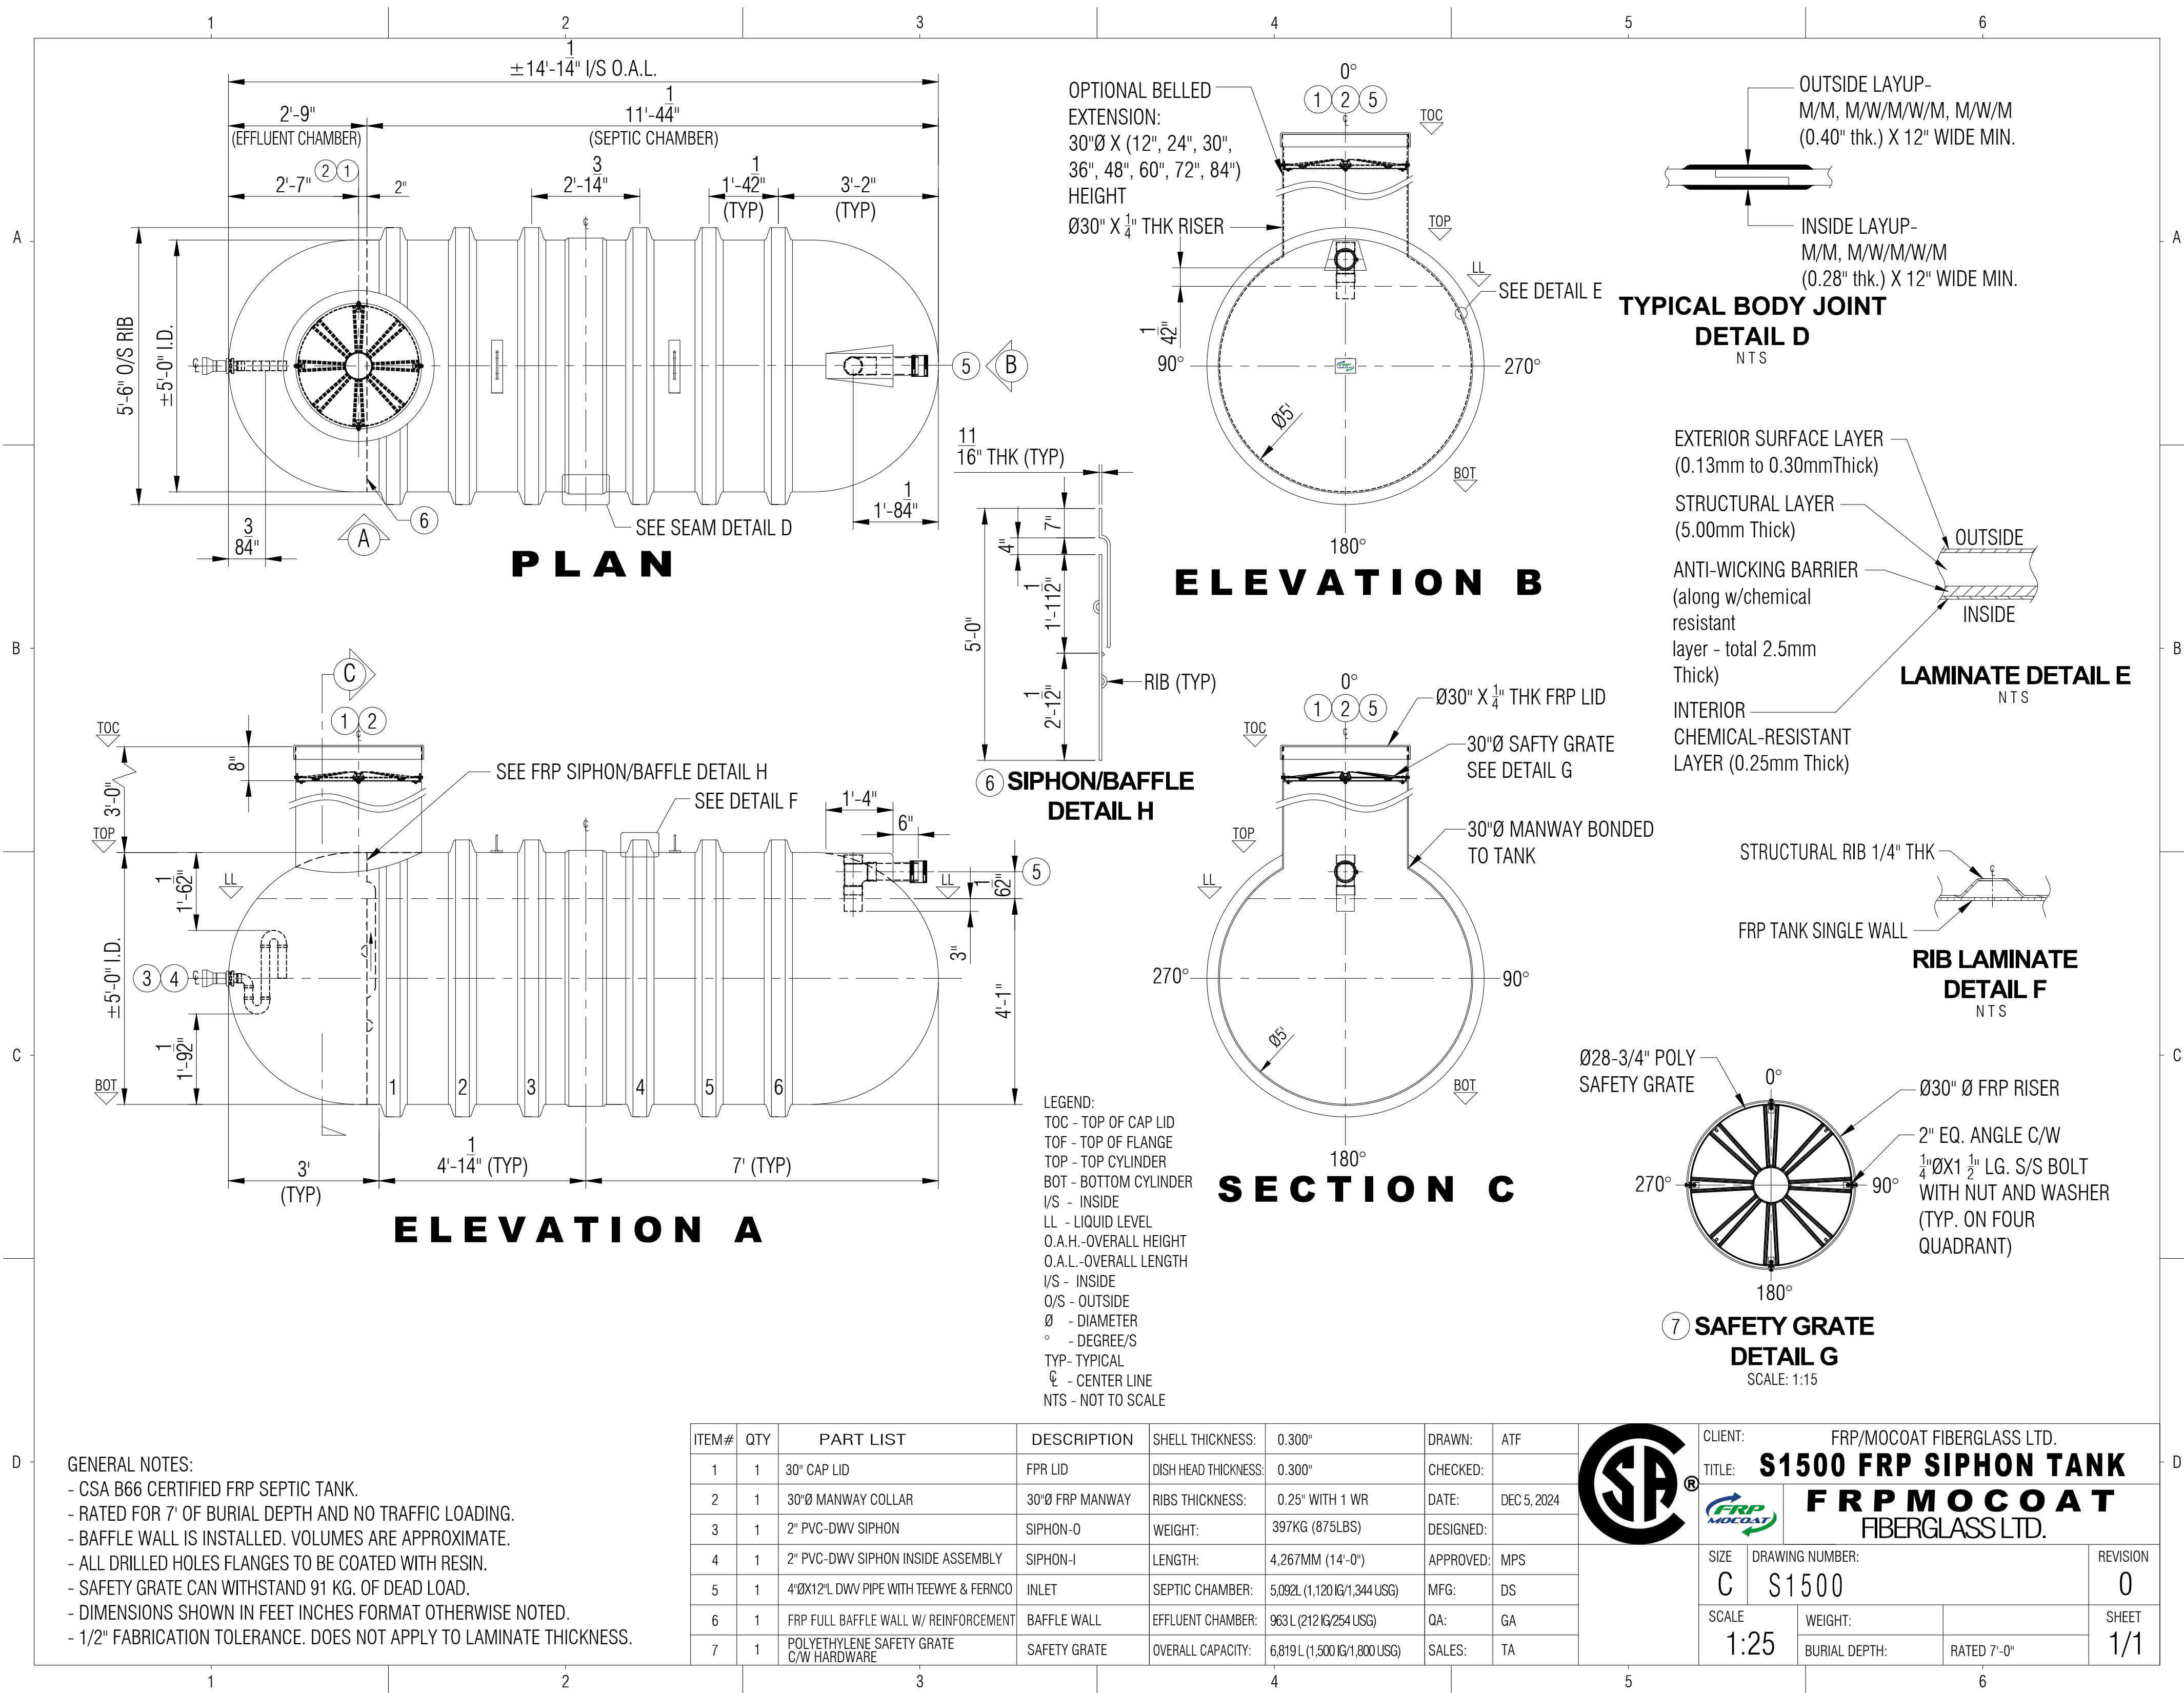

GENERAL NOTES:

- CSA B66 CERTIFIED FRP SEPTIC TANK.
- RATED FOR 7' OF BURIAL DEPTH AND NO TRAFFIC LOADING.
- BAFFLE WALL IS INSTALLED. VOLUMES ARE APPROXIMATE.
- ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN.
- SAFETY GRATE CAN WITHSTAND 91 KG. OF DEAD LOAD.
- DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED.
- 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS.

ITEM#	QTY	PART LIST	DESCRIPTION	SHELL THICKNESS:	0.300"	DRAWN:	ATF		CLIENT: FRP/MOCOAT FIBERGLASS LTD.			
1	1	30" CAP LID	FPR LID	DISH HEAD THICKNESS:	0.300"	CHECKED:			TITLE: S1500 FRP SIPHON TANK			
2	1	30"Ø MANWAY COLLAR	30"Ø FRP MANWAY	RIBS THICKNESS:	0.25" WITH 1 WR	DATE:	DEC 5, 2024		 FRP MOCOAT			
3	1	2" PVC-DWV SIPHON	SIPHON-O	WEIGHT:	397KG (875LBS)	DESIGNED:			FIBERGLASS LTD.			
4	1	2" PVC-DWV SIPHON INSIDE ASSEMBLY	SIPHON-I	LENGTH:	4,267MM (14'-0")	APPROVED:	MPS		SIZE	DRAWING NUMBER:		REVISION
5	1	4"ØX12"L DWV PIPE WITH TEEWYE & FERNCO	INLET	SEPTIC CHAMBER:	5,092L (1,120 IG/1,344 USG)	MFG:	DS		C	S1500		0
6	1	FRP FULL BAFFLE WALL W/ REINFORCEMENT	BAFFLE WALL	EFFLUENT CHAMBER:	963L (212 IG/254 USG)	QA:	GA		SCALE	1:25	WEIGHT:	SHEET
7	1	POLYETHYLENE SAFETY GRATE C/W HARDWARE	SAFETY GRATE	OVERALL CAPACITY:	6,819 L (1,500 IG/1,800 USG)	SALES:	TA			BURIAL DEPTH:	RATED 7'-0"	1/1

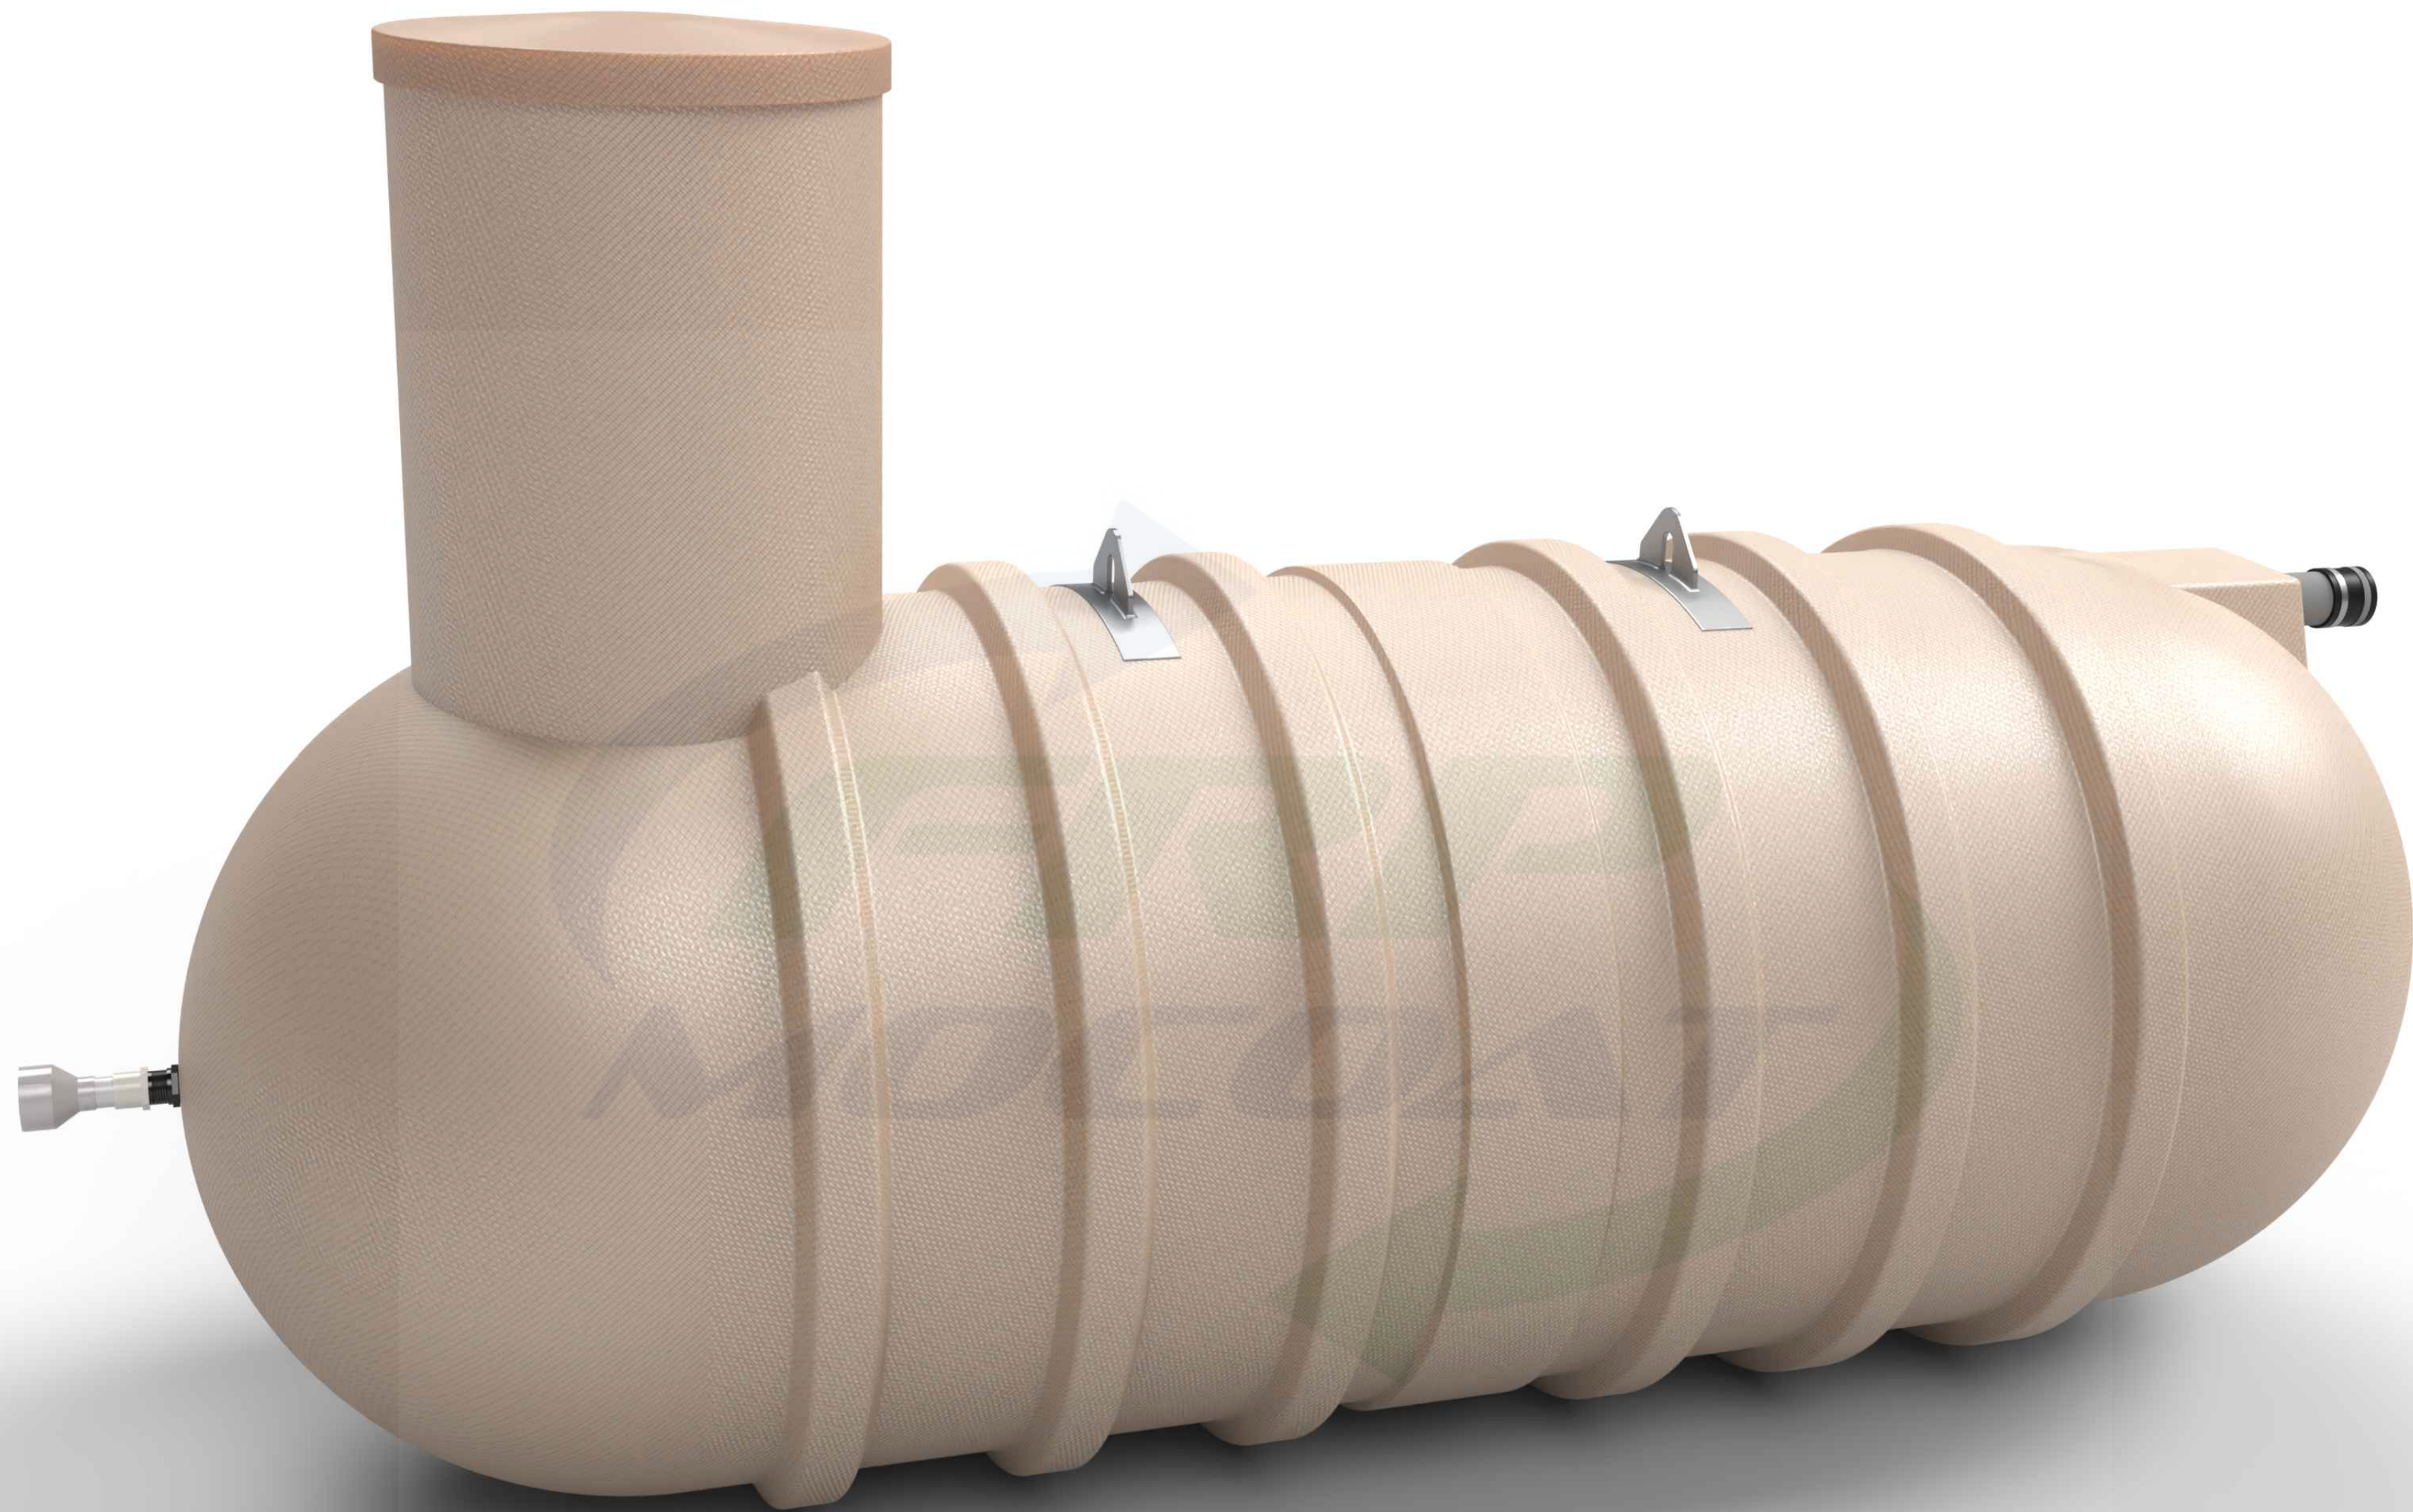

S1500 FRP SIPHON TANK

