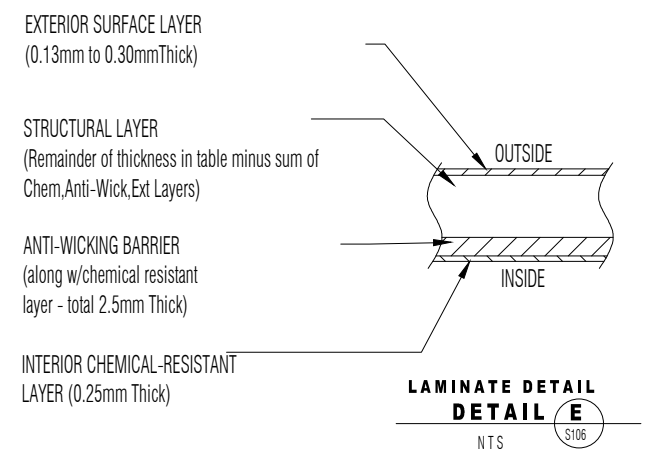
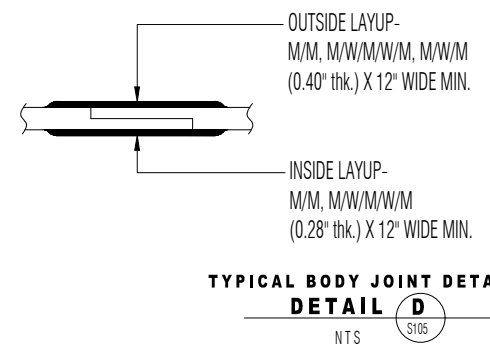
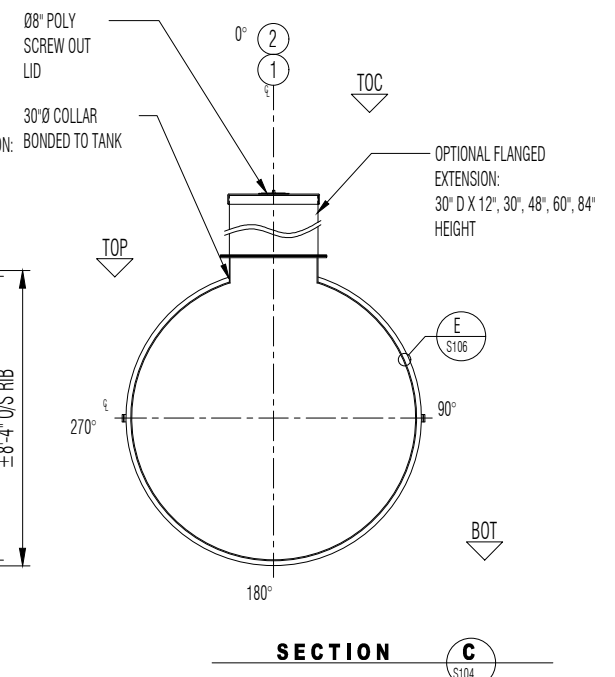
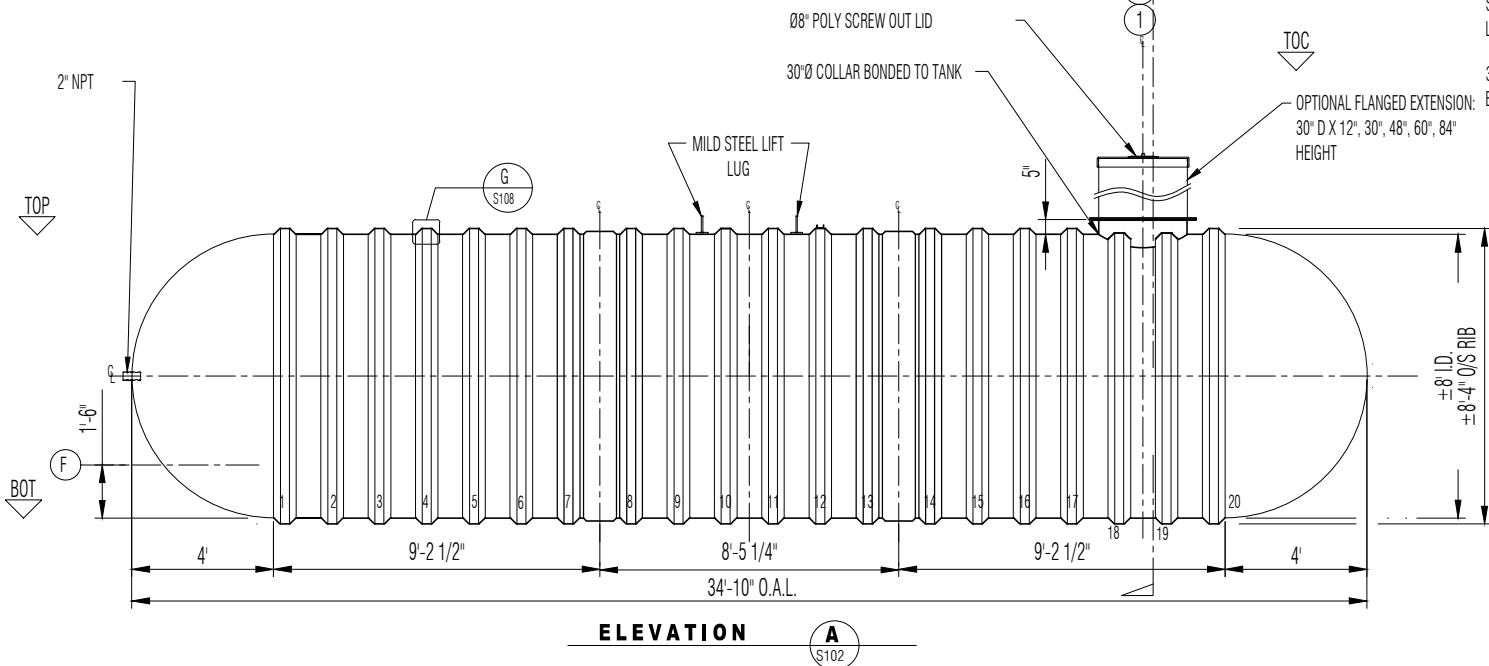
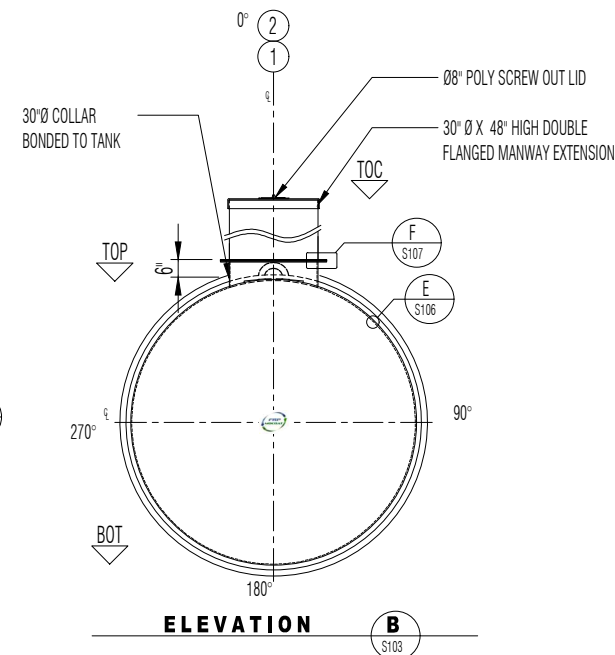
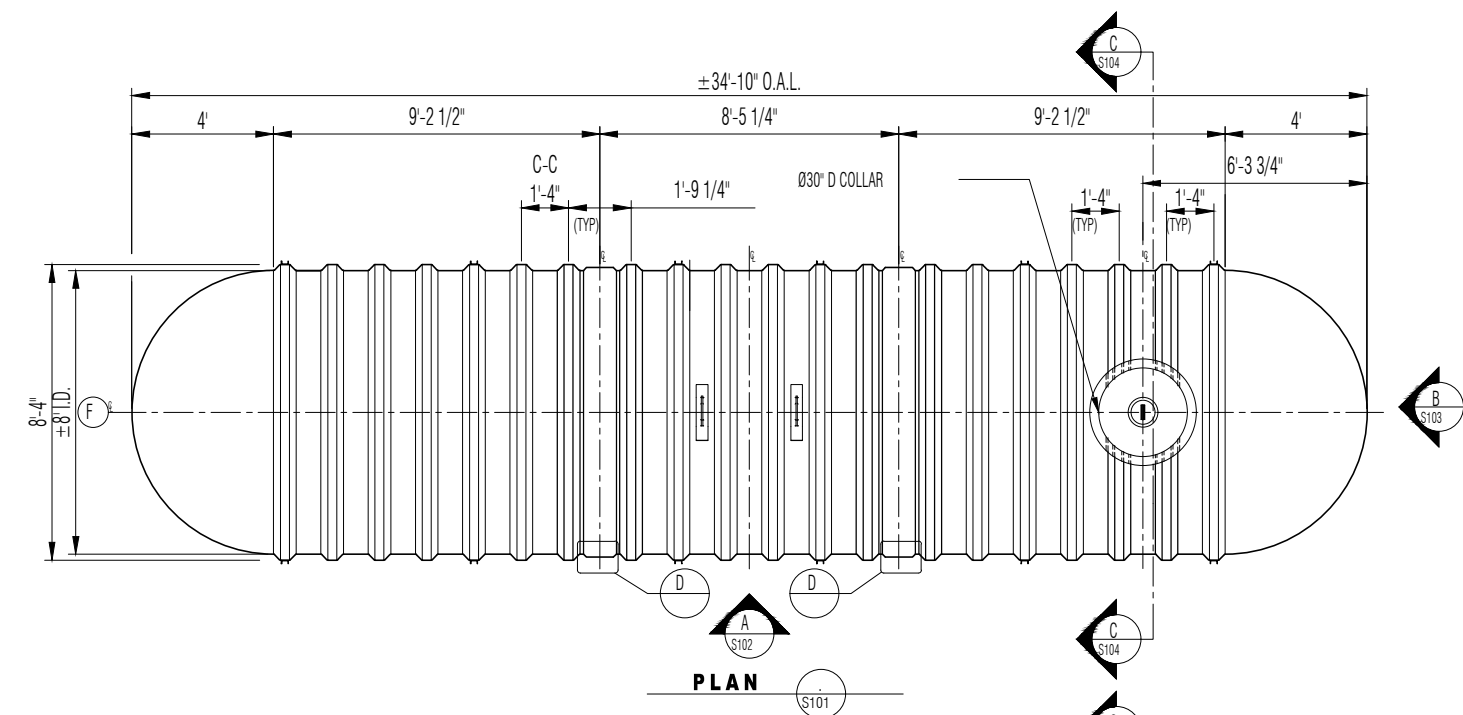


LEGEND:
TOC - TOP OF CAP LID
TOF - TOP OF FLANGE
TOP - TOP CYLINDER
BOT - BOTTOM CYLINDER
I/S - INSIDE
LL - LIQUID LEVEL
O.A.H.-OVERALL HEIGHT
O.A.L.-OVERALL LENGTH
I/S - INSIDE
O/S - OUTSIDE
Ø - DIAMETER
° - DEGREE/S
TYP- TYPICAL
CL - CENTER LINE
NTS - NOT TO SCALE
LOCATION OF HOLD DOWN STRAP


GENERAL NOTES
- CSA ANSI / NSF 61 CERTIFIED FRP POTABLE WATER TANK.
- RATED FOR 7' OF BURIAL DEPTH AND NO TRAFFIC LOADING.
- ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN..
- DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED.
- 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS.

ITEM#	QTY	PART LIST	DESCRIPTION
1	1	30"CAP LID W/ 8"D POLY SCREW OUT INSERT, VENTED	FRP LID
2	1	30" MANWAY COLLAR	30"Ø FRP MANWAY
3	1	2" FRP NPT CONNECTION	OUTLET
4	2	CARBON STEEL LIFT LUG	LIFT LUG
5			
6			
7			

SHELL THICKNESS:	0.375"	DRAWN:	EA/ATF
HEMI HEAD THICKNESS:	0.475"	CHECKED:	MPS
RIBS THICKNESS:	0.25"	DATE:	JUL. 24, 2026
RIB SPACING:	16" CL TO CL	DESIGNED:	FRP
WEIGHT:	1,700 KG (3,750 LBS)	APPROVED:	MPS
LENGTH:	10,617MM (34'-10")	MFG.:	TS
WORKING CAPACITY:	N/A	QA:	BR
OVERALL CAPACITY:	45,770L (10,068 IG/12,082 USG)	SALES:	DG

CLIENT: FRP/MOCOAT FIBERGLASS LTD.
TITLE: **B10000W FRP POTABLE WATER TANK**
FRPMOCOAT
FIBERGLASS LTD.

SIZE: B	DRAWING NUMBER: B10000W	REVISION: 0
SCALE: .	WEIGHT: 1,700 KG (3,750 LBS)	SHEET: 1/1
	BURIAL DEPTH: RATED 7'- 0"	

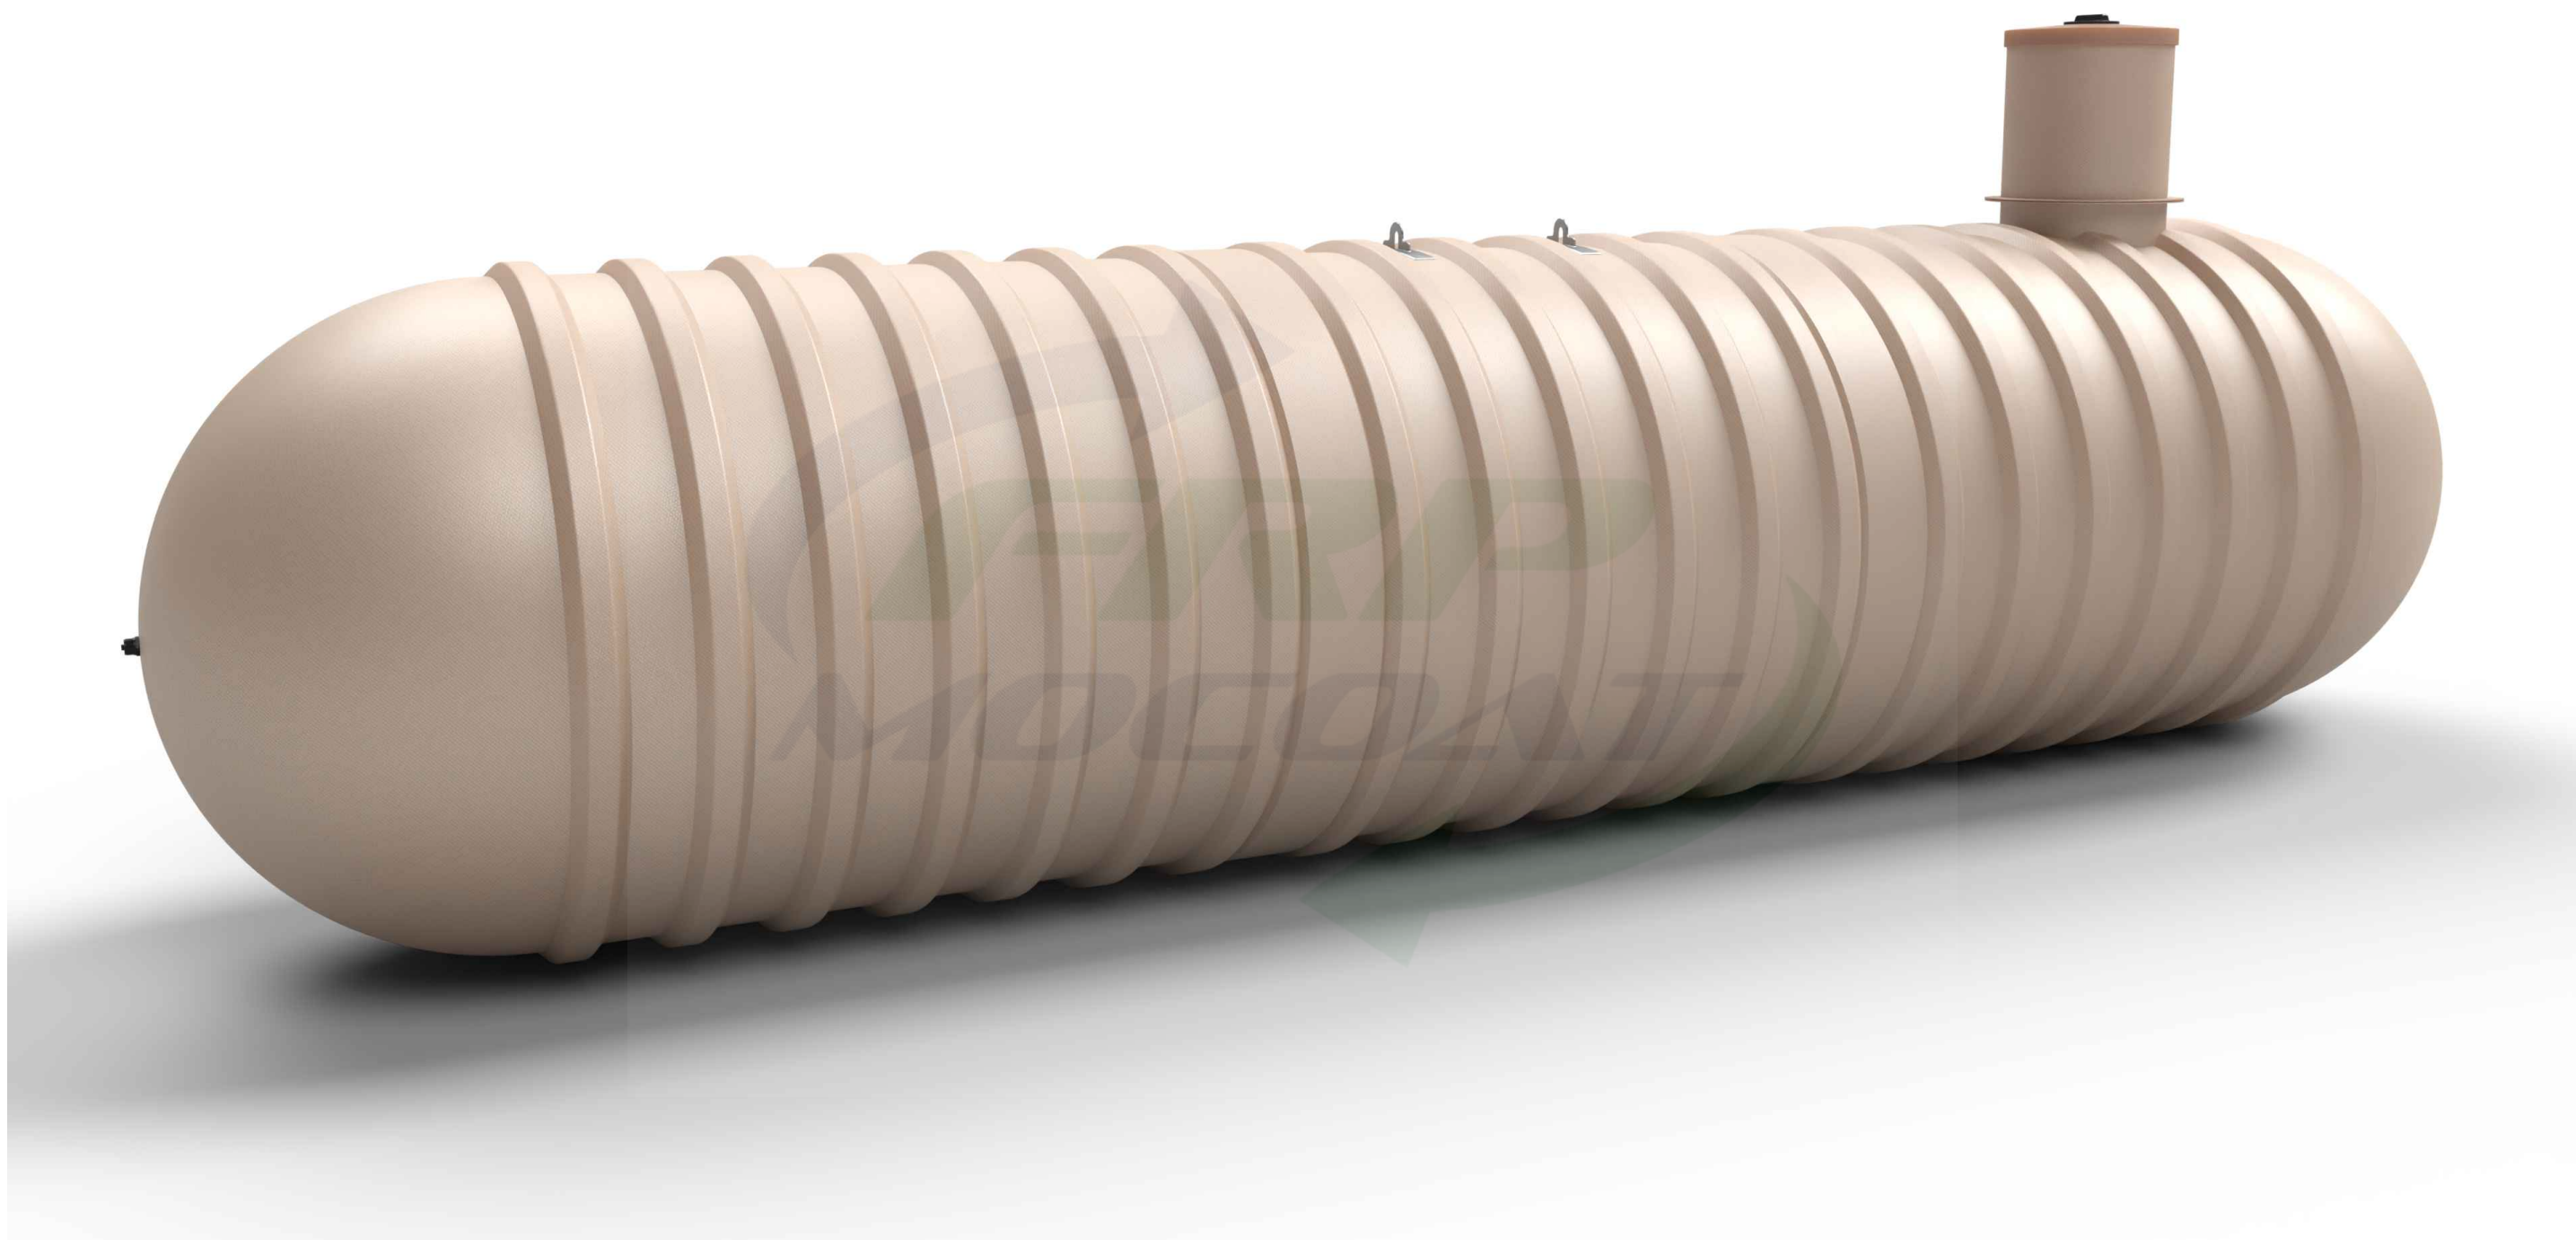

B10000W FRP POTABLE WATER TANK

