


LAMINATE DETAIL

BELL RISER
(30" ht. shown)

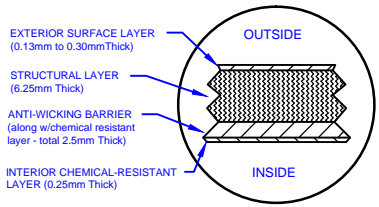

SECTION-JOINT
DETAIL

Specifications

Cylinder Thickness	0.346"	Liquid Depth (holding tank)	N/A
End Cap Thickness	0.351"	Septic Chamber Depth	49"
Inlet Height (C.L.)	56"	Effluent Chamber Depth	49"
Outlet Height (C.L.)	30"	Chamber Wall dimensions	
Inlet Diameter	4"	Height:	60"
Outlet Diameter (Not installed)	2"	Thickness:	0.66"
Rib Dimension (C to C)	16.5"	Opening Diameter:	4"

30"D Cap Lid

30"D x 30"H manway bond directly to tank

Divider Wall

31"
[787mm]

33"
[838mm]

Pump/Effluent Chamber

38"
[965mm]

16.5"
[419mm]

38"
[965mm]

14'
[4267mm]

Structural Rib

Liquid Level

49"

Std 4" PVC-DWV
90°inlet

4"
[102mm]

5'
[1524mm]
i.d.

5'-6"
[1676mm]
o.d.

Septic Chamber



66"
[1676mm]

FRP
MANUFACTURING (2010) INC.

Website: www.frpmsg.com
Toll Free: 1-866-722-6246

P1500-BONDED-DB FIBREGLASS PUMPOUT TANK

DATE: 01-07-2014

Overall Length:	Approx. 4,267mm (14')
Overall Weight:	Approx. 453 kg (1000 lbs)
Septic Chamber:	Approx. 5,092L (1,120 Imp Gal, 1,344 US Gal)
Effluent Chamber:	Approx. 963L (212 Imp Gal, 254 US Gal)
Overall Capacity:	Approx. 6,819L (1,500 Imp Gal, 1,800 US Gal)

BY: MPS
BURIAL DEPTH: 12 Ft
REV: 1
APPROVAL:
DATE:

