




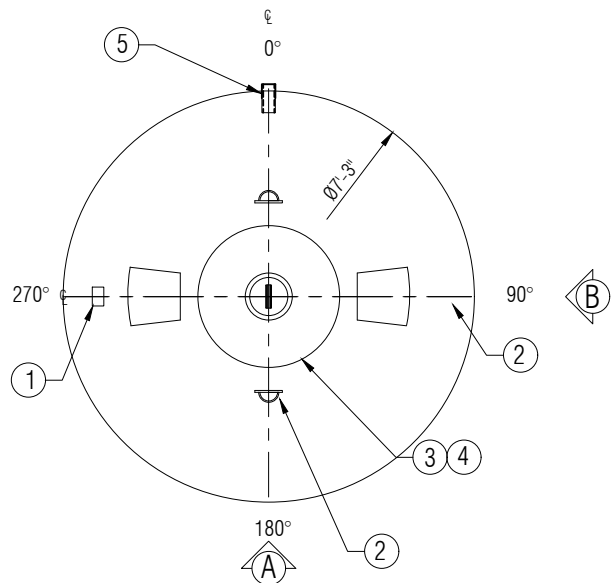


PLAN

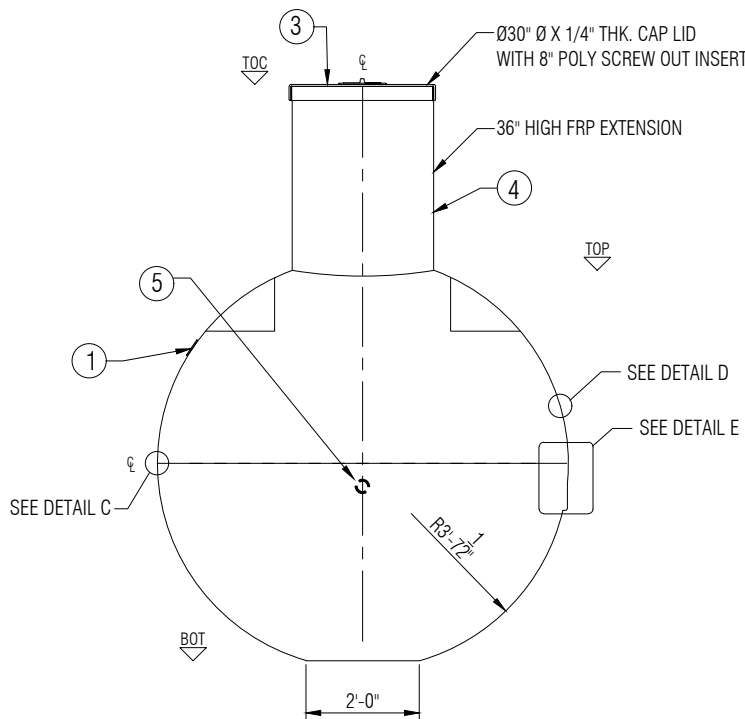


ELEVATION A

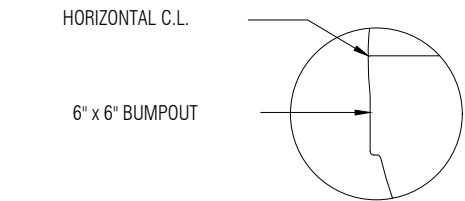

DETAIL E

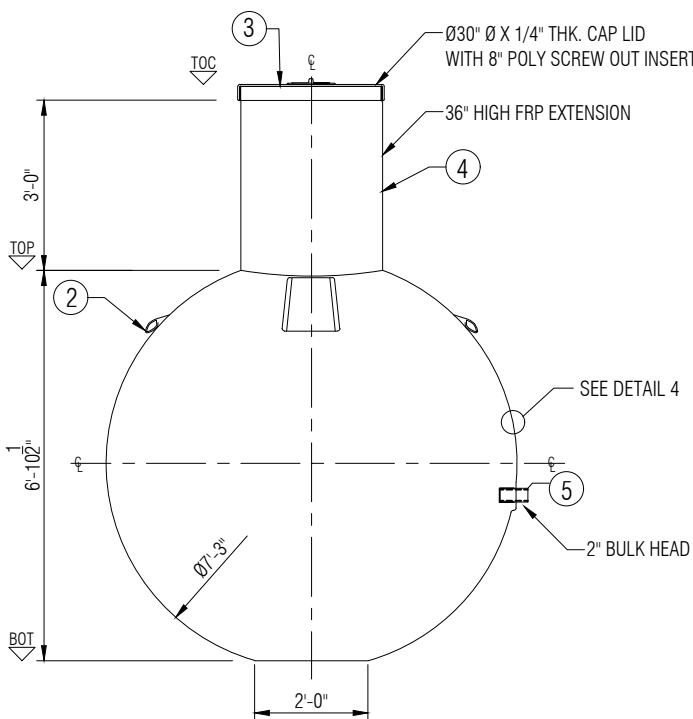


ELEVATION B

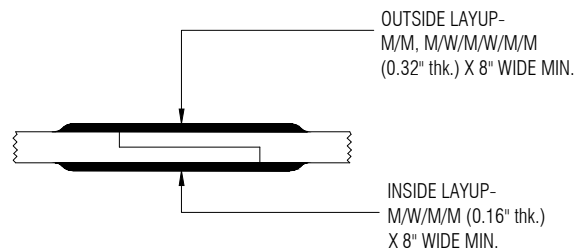

BODY JOINT DETAIL C

EXTERIOR SURFACE LAYER
(0.33mm Thick)
STRUCTURAL LAYER
(1.9mm Thick)
ANTI-WICKING BARRIER
(along w/chemical resistant
layer - total 2.5mm Thick)
INTERIOR CHEMICAL-RESISTANT
LAYER (0.25mm Thick)

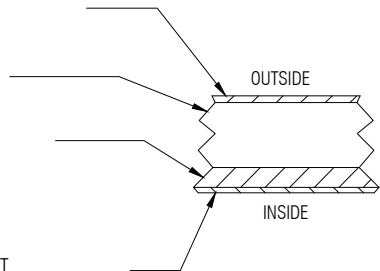

LAMINATE DETAIL D
NTS

LEGEND:
TOC - TOP OF CAP LID
TOF - TOP OF FLANGE
TOP - TOP CYLINDER
BOT - BOTTOM CYLINDER
I/S - INSIDE
LL - LIQUID LEVEL
O.A.H.-OVERALL HEIGHT
O.A.L.-OVERALL LENGTH
I/S - INSIDE
O/S - OUTSIDE
Ø - DIAMETER
° - DEGREE/S
TYP- TYPICAL
CL - CENTER LINE
NTS - NOT TO SCALE

GENERAL NOTES
- CSA ANSI / NSF 61 CERTIFIED FRP POTABLE WATER TANK.
- RATED FOR 10' OF BURIAL DEPTH AND NO TRAFFIC LOADING.
- ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN..
- DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED.
- 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS.

ITEM#	QTY	PART LIST	DESCRIPTION
1	1	NAMEPLATE	
2	2	LIFTING HANDLE	LIFT LUG
3	1	30"CAP LID W/ 8"D POLY SCREW OUT INSERT, VENTED	FRP LID
4	1	30" D. FRP LID & 36" HIGH MANWAY EXTENSION	30"Ø FRP MANWAY
5	1	2" FRP NPT CONNECTION	OUTLET

APPROX. WEIGHT:	182KG (400LBS.)	DRAWN:	EA/ATF
OVERALL DIAMETER :	2,210MM (87")	CHECKED:	MPS
WORKING CAPACITY:	N/A	DATE:	JUL. 22, 2026
OVERALL CAPACITY:	5,655 L (1244 IG/1493 USG)	DESIGNED:	FRP
		APPROVED:	MPS
		MFG.:	TS
		QA:	GA
		SALES:	DG



CLIENT:	FRP/MOCOAT FIBERGLASS LTD.		
TITLE:	WB1200 FRP POTABLE WATER TANK		
	FRPMOCOAT FIBERGLASS LTD.		
SIZE:	DRAWING NUMBER:		REVISION:
B	WB1200		0
SCALE:	WEIGHT:	182KG (400LBS.)	SHEET:
.	BURIAL DEPTH:	RATED 10'-0"	1/1



WB1200 FRP POTABLE WATER TANK

