




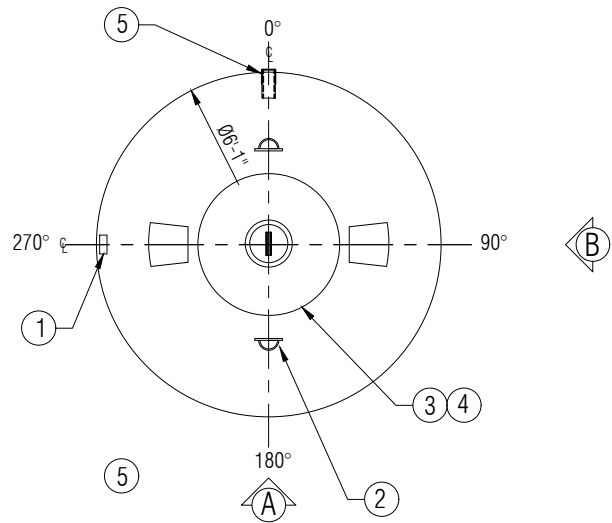


PLAN

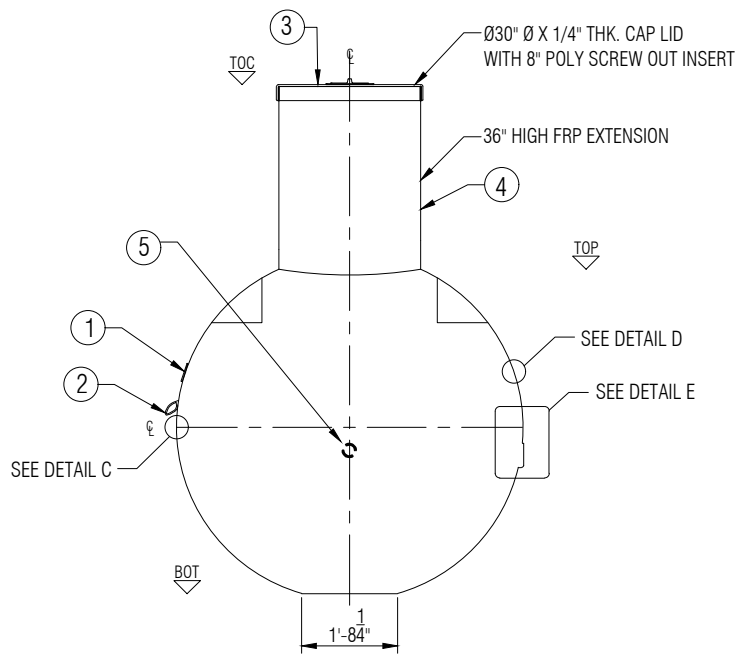


ELEVATION A

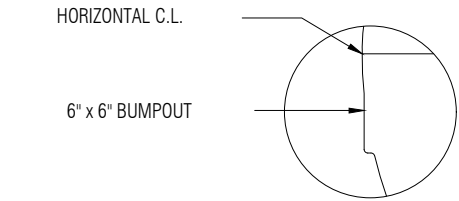

DETAIL E

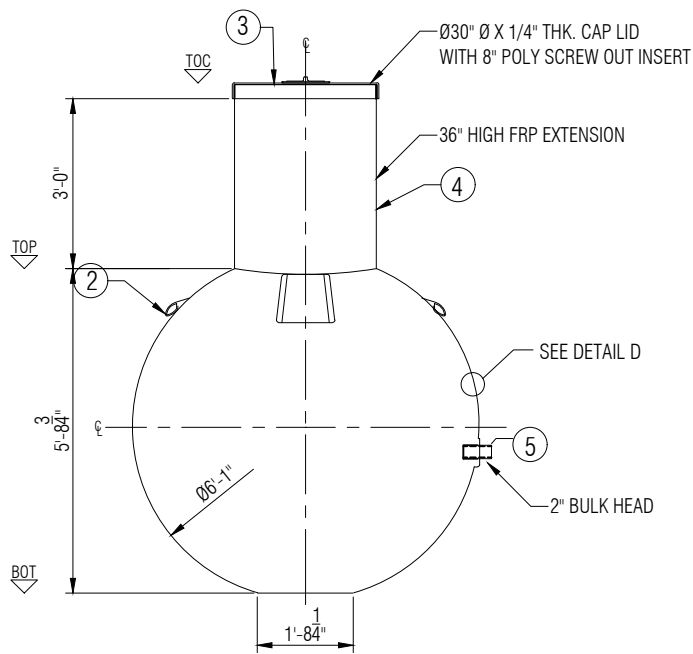

ELEVATION B

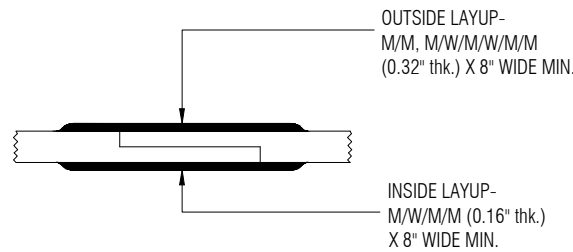


BODY JOINT DETAIL C

EXTERIOR SURFACE LAYER
(0.33mm Thick)

STRUCTURAL LAYER
(1.9mm Thick)

ANTI-WICKING BARRIER
(along w/chemical resistant
layer - total 2.5mm Thick)

INTERIOR CHEMICAL-RESISTANT
LAYER (0.25mm Thick)

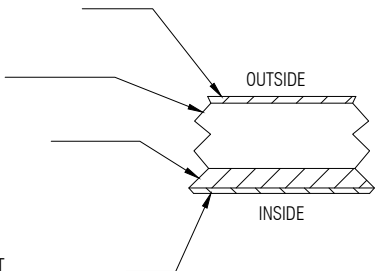

LAMINATE DETAIL D
NTS

LEGEND:
TOC - TOP OF CAP LID
TOF - TOP OF FLANGE
TOP - TOP CYLINDER
BOT - BOTTOM CYLINDER
I/S - INSIDE
LL - LIQUID LEVEL
O.A.H.-OVERALL HEIGHT
O.A.L.-OVERALL LENGTH
I/S - INSIDE
O/S - OUTSIDE
Ø - DIAMETER
° - DEGREE/S
TYP- TYPICAL
CL - CENTER LINE
NTS - NOT TO SCALE

GENERAL NOTES

- CSA ANSI/ NSF 61 CERTIFIED FRP POTABLE WATER TANK.
- RATED FOR 10' OF BURIAL DEPTH AND NO TRAFFIC LOADING.
- ALL DRILLED HOLES FLANGES TO BE COATED WITH RESIN..
- DIMENSIONS SHOWN IN FEET INCHES FORMAT OTHERWISE NOTED.
- 1/2" FABRICATION TOLERANCE. DOES NOT APPLY TO LAMINATE THICKNESS.

ITEM#	QTY	PART LIST	DESCRIPTION
1	1	NAMEPLATE	
2	2	LIFTING HANDLE	LIFT LUG
3	1	30"CAP LID W/ 8"D POLY SCREW OUT INSERT, VENTED	FRP LID
4	1	30" D. FRP LID & 36" HIGH MANWAY EXTENSION	30"Ø FRP MANWAY
5	1	2" FRP NPT CONNECTION	OUTLET

APPROX. WEIGHT:	136KG (300LBS.)	DRAWN:	EA/ATF
OVERALL DIAMETER: :	1,845MM (73")	CHECKED:	MPS
WORKING CAPACITY:	N/A	DATE:	AUG. 19,2025
OVERALL CAPACITY:	3,337 L (734 IG/881 USG)	DESIGNED:	FRP
		APPROVED:	MPS
		MFG.:	DS
		QA:	GA
		SALES:	TA



CLIENT: FRP/MOCOAT FIBERGLASS LTD.			
TITLE: WB750 FRP POTABLE WATER TANK			
FRPMOCOAT FIBERGLASS LTD.			
SIZE: B	DRAWING NUMBER: WB750	REVISION: 0	SHEET: 1/1
SCALE: .	WEIGHT: 136KG (300LBS.)	BURIAL DEPTH: RATED 10'-0"	



WB750 FRP POTABLE WATER TANK

